



# FLUSH & MOLDED DOORS

REEB® IN-STOCK FLUSH & MOLDED CATALOG



## Update with Ease using Flush & Molded Doors

Reeb® offers a wide variety of molded doors designed to replicate the look and feel of traditional wood doors at an affordable price.

With layout options from modern and minimalist to classic and conventional, molded interior doors are a popular option in both residential and light commercial applications.

# Table of Contents

Door Styles	4	Colburn - Smooth	24	Flush Birch	42
Door Applications	5	Colburn - Textured	25	Flush Oak	43
Slab or Door Unit	6	Layouts - Masonite		Jambs	44
Construction Types	7	Molded Doors	27	Fire Door Frames	44
Layouts - Steves		Solid Particle Core		Frame Profiles	44
Molded Doors	8	Construction	28	Hinges	45
Solid Particle Core		Panel Options	29	Fire Door Hinges	45
Construction	10	Surface Option	29	Hardware	46
Panel Options	11	Sticking Options	29	Schlage	
Surface Options	11	Hollow Core		» Standard Residential Series	46
Sticking Options	11	Construction	30	» Builder's Series	46
Hollow Core		Panel Options	31	Catches	47
Construction	12	Surface Option	31	Precision™	
Panel Options	13	Sticking Options	31	» Concealed Magnetic Catch	47
Surface Options	13	Lincoln Park®	32	Reeb® Specialty Products	
Sticking Options	13	Logan®	33	» Ball Catch	47
Maddox	14	Winslow®	34	Ives®	
Montgomery	15	Bayshore	35	» Surface Magnetic Catch	47
Cambrian	16	Cheyenne®	36	» Roller Catch	47
Connelly	17	Riverside®	37	Barn Door Hardware	48
Sandhurst	18	Flush Doors	38	Barnfold® Hardware	49
Camdale	19	Solid Particle Core	38	Warranty	49
Crayburn	21	Solid Wood Core	38	Door Index	50
Connivo	22	Hollow Core	39	Image Index	51
Rochele	23	Flush Primed	40	Resources	51
		Flush Lauan	41		

# Door Styles

Reeb® offers a variety of molded door designs, along with a range of flush door options to suit any home design.

## Molded Doors

Molded doors are constructed when a series of panels or design is stamped by a mold into a hardboard fiber material to create the door face. They are manufactured to resemble the look of an interior stile and rail wood door. Solid Particle Core molded doors are available in a variety of designs and can replicate the heavy weight and feel of a real wood door while providing the benefit of noise reduction for a peaceful environment.

### Finishing

Molded doors are available in smooth or textured surfaces. They arrive primed and after a light sanding and minor preparation, they are ready for painting. Due to the materials used in their construction, staining is not an option. Always make sure to finish all six sides.



## Flush Doors

Flush doors are constructed using a mixture of wood and wood-fiber components and feature a completely flat surface for a simple and economical design option. They are available in a variety of wood species, most of which can be painted or stained. Some flush doors also come in a primed hardboard.

### Finishing

Flush doors are available in paint-grade, stain-grade and primed hardboard options. Primed flush doors require only a light sanding and cleaning before applying a base coat.

#### Paint-Grade

Luan doors typically feature irregular colors and grain patterns that most homeowners will opt to paint over. Flush hardboard doors are factory primed and ready for painting.

#### Stain-Grade

Birch and Oak doors feature solid wood edges and all the pleasing color variations and grain patterns found in a natural wood product. They look great painted or stained.




# Door Applications



## Bifold Doors

Bifold doors are a popular option for saving room in closet areas or other tight spaces throughout your home. These doors provide better access to small areas and take up minimal space. All Reeb® molded bifold doors feature panels on both sides.

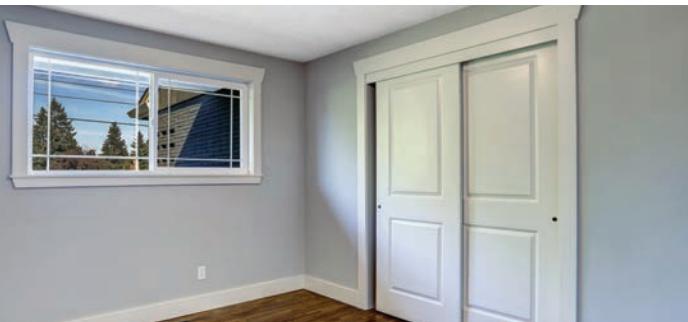

## Sliding Bypass Doors

Sliding Bypass doors are configured by hanging two or more interior doors mounted to a track. They do not swing and are typically useful in areas with little available floor space.



## Pocket Doors

Pocket doors slide similarly to bypass doors, but are generally a single door mounted to an overhead track that slides into the wall, hiding the components and saving space.



## Custom Sized Doors

For odd sized openings, doors can be crafted from standard flush and molded components, for example, attic access and under the stairs storage. Flush doors can be reduced to any height to fit and depending on the specific design, some molded doors can also be reduced to fit custom applications.



## Barn Door Track Hardware

Barn Door Track Hardware allows the door to slide horizontally beyond the opening on a track mounted above the door. This allows you to make the most of your available living space while adding a rustic, yet elegant look.

See [page 48](#) for more information on Barn Door and Barnfold® Track Hardware.

# Slab or Door Unit


Doors can be purchased either as a slab (single door only, no frame) or fully assembled pre-hung unit (door and frame).

In a pre-hung unit, the door comes mounted in a frame with hinges already attached to a door jamb. Reeb® stocks several paint-grade and stain-grade jamb options to complement the door.

See [page 44](#) to learn more about jamb options.


## Pre-fit and Beveled Edges

Typically used on pre-hung door units, edges are undersized by 3/16" and feature a 3 degree bevel on both sides, eliminating the need to field-trim the door to fit the frame.

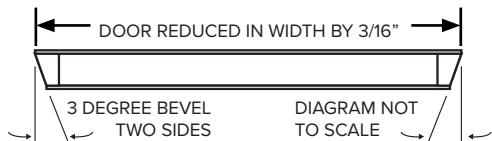


## Full and Square Edges

Typically used for replacements, these doors feature a 90 degree angle on all edges, allowing the door to be field-trimmed if necessary.



# Construction Types

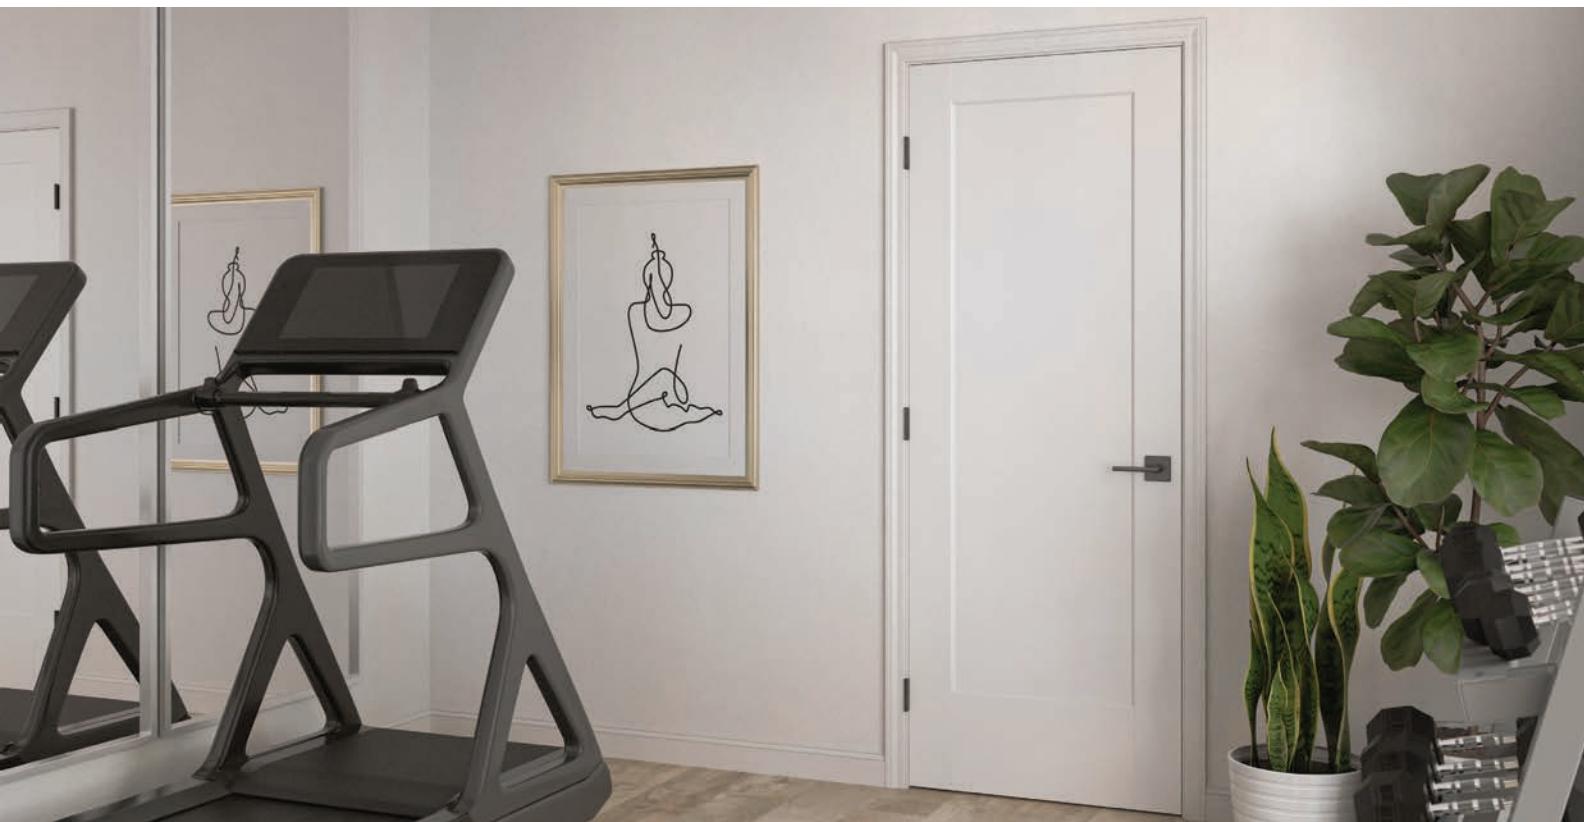

## Solid Particle Core (SC)

- Weight and feel of a wood door
- Reduces sound transmission
- Reeb® stocks Solid Particle Core doors with wood stiles and rails for additional screw holding power
- Great for residential and light commercial applications like living rooms, bedrooms, hallways and large storage areas
- Can be fire-rated up to 20 minutes with certified frames and hardware

See [pages 10-11 & 28-29](#) for more information on Solid Particle Core construction.



## Hollow Core (HC)

- Standard offering includes MDF/fiber stiles
- Commonly used in residential applications where sound transmission and durability is not a primary concern

See [pages 12-13 & 30-31](#) for more information on Hollow Core construction.

# Layouts

STEVES MOLDED DOORS						
	MADDOX	MONTGOMERY	CAMBRIAN	CONNELLY	SANDHURST	CAMDALE
LAYOUT	1 PANEL	2 PANEL	2 PANEL	2 PANEL	2 PANEL	2 PANEL
PANEL TYPE	Flat Panel	Flat Panel	Raised Panel	Raised Panel	V-Groove Plank	Raised Panel
SURFACE	Smooth	Smooth	Smooth	Smooth	Smooth	Textured
STICKING	Craftsman	Craftsman	Cove & Bead	Cove & Bead	Ovolo	Cove & Bead

SOLID PARTICLE CORE						
HEIGHT	6/8, 7/0, 8/0	6/8, 8/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0	6/8
THICKNESS	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"
FIRE RATING*	20 Minute					

HOLLOW CORE						
HEIGHT	6/8	6/8, 8/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0	6/8
THICKNESS	1-3/8"	1-3/8"	1-3/8"	1-3/8"	1-3/8"	1-3/8"
FIRE RATING	None	None	None	None	None	None

PAGE	14	15	16	17	18	19
------	----	----	----	----	----	----

\* Fire Rating Only Applicable to 1-3/4" Doors



STEVES MOLDED DOORS				
	CRAYBURN	CONMIVO	ROCHELE	COLBURN (SMOOTH)
LAYOUT	3 PANEL	5 PANEL	5 PANEL	6 PANEL
PANEL TYPE	Flat Panel	Flat Panel	Raised Panel	Raised Panel
SURFACE	Smooth	Smooth	Smooth	Smooth
STICKING	Craftsman	Step	Cove & Bead	Cove & Bead
COLBURN (TEXTURED)				

SOLID PARTICLE CORE				
HEIGHT	6/8, 7/0	6/8, 7/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0
THICKNESS	1-3/8", 1-3/4"	1-3/8", 1-3/4" <sup>†</sup>	1-3/8", 1-3/4"	1-3/8", 1-3/4"
FIRE RATING*	20 Minute	20 Minute	20 Minute	20 Minute

HOLLOW CORE					
HEIGHT	6/8, 7/0	6/8, 7/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0	6/8, 7/0, 8/0
THICKNESS	1-3/8"	1-3/8", 1-3/4"	1-3/8"	1-3/8"	1-3/8"
FIRE RATING	None	None	None	None	None

PAGE	21	22	23	24	25
------	----	----	----	----	----

\* Fire Rating Only Applicable to 1-3/4" Doors

<sup>†</sup> 1-3/4" Available in 6/8 Only



# Solid Particle Core Construction



## **1** Wood Stiles & Rails

Made of solid wood for extra screw holding power

## **2** Face

1/8" molded hardboard skin (available in smooth or textured painting surface)

## **3** Core

Solid particle board core routed to match molded skin design

## **4** Thickness

Available in 1-3/8" & 1-3/4"

## **5** Height

Available in 6/8, 7/0 & 8/0

## **A** Wood Rail

Field-trimming can affect fire ratings. To ensure proper ratings, doors must be factory trimmed by Reeb®.

### Rail - 6/8 height, 1-3/8" thickness doors

1" top and bottom rail

### Rail - 6/8 height, 1-3/4" thickness doors

1" top rail and 2" bottom rail, allowing the door to be field-trimmed up to 1"

### Rail - 7/0 & 8/0 height

All 7/0 and 8/0 height doors have a 1" top rail and a 1" bottom rail





Solid Particle Core (SC) molded doors are used in a variety of residential and light commercial interior applications. The advantages of solid particle core construction are added security, reduced sound transmission, and a fire rating of up to 20 minute (1-3/4" Doors Only). The solid construction gives the door a heavier weight and the feel is similar to an interior wood stile and rail door. Reeb® offers a wide variety of designs with smooth or textured surfaces.

### Panel Options




RAISED PANEL



FLAT PANEL

### Surface Options

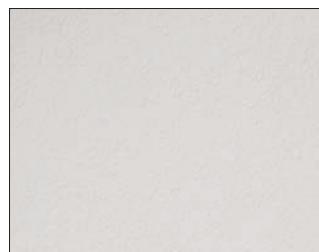

SMOOTH SURFACE



TEXTURED SURFACE

### Sticking Options



CRAFTSMAN STICKING



COVE & BEAD STICKING



OVOLLO STICKING



STEP STICKING

# Hollow Core Construction



## 1 Fiber or Wood Stile

## 2 Blocking

Provides support for door faces

## 3 Face

1/8" molded hardboard skin (available in smooth or textured painting surface)

## 4 Core

Hollow core is comprised of corrugated board and foam

## 5 Thickness

Available in 1-3/8" Only

## 6 Height

Available in 6/8, 7/0 & 8/0

## A Fiber Rail

Rail - 6/8 height, 1-3/8" thickness doors

1" Fiber top and bottom rail. Cannot be field-trimmed without reblocking.

Stile - 6/8 height, 1-3/8" thickness doors

Stile can be either Fiber or Finger-Jointed Wood

Stile - 7/0 & 8/0 height

Wood Stile





Hollow Core (HC) molded doors offer a lighter-weight, economic alternative to wood stile and rail interior doors. Available in a variety of designs with smooth or textured surfaces.

### Panel Options




RAISED PANEL



FLAT PANEL

### Surface Options

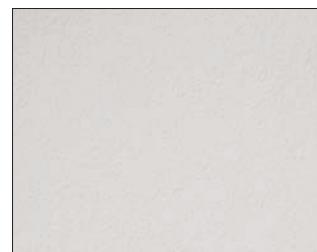

SMOOTH SURFACE



TEXTURED SURFACE


### Sticking Options



CRAFTSMAN STICKING



COVE & BEAD STICKING

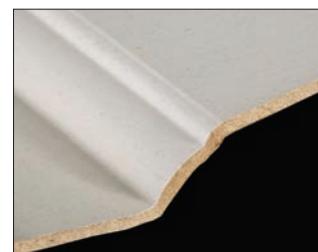

OVOLIO STICKING



STEP STICKING

# Maddox



STANDARD




TALL




BI-FOLD

STANDARD WIDTH	STANDARD			TALL		
	6/8	7/0	8/0	6/8	7/0	8/0
HEIGHT	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0	SC/HC					
1/2	SC/HC					
1/3	SC/HC					
1/4	SC/HC					
1/6	SC/HC	SC	SC/HC		SC	
1/8	SC/HC		SC			
1/10	SC/HC					
2/0	SC/HC	SC	SC/HC	SC	SC	
2/2	SC/HC					
2/4	SC/HC	SC	SC/HC	SC	SC	
2/6	SC/HC	SC	SC/HC	SC	SC	SC
2/8	SC/HC	SC	SC/HC	SC	SC	SC
2/10	SC/HC	SC	SC	SC	SC	
3/0	SC/HC	SC	SC/HC	SC	SC	SC

6/8
1-3/8"
BI-FOLD SIZES
2 DOOR
2/0 SC/HC
2/4
2/6 SC/HC
2/8
3/0 SC/HC
4 DOOR
4/0 SC/HC
4/8
5/0 SC/HC
5/4
6/0 SC/HC



PANEL DETAIL




SMOOTH SURFACE



CRAFTSMAN STICKING

# Montgomery

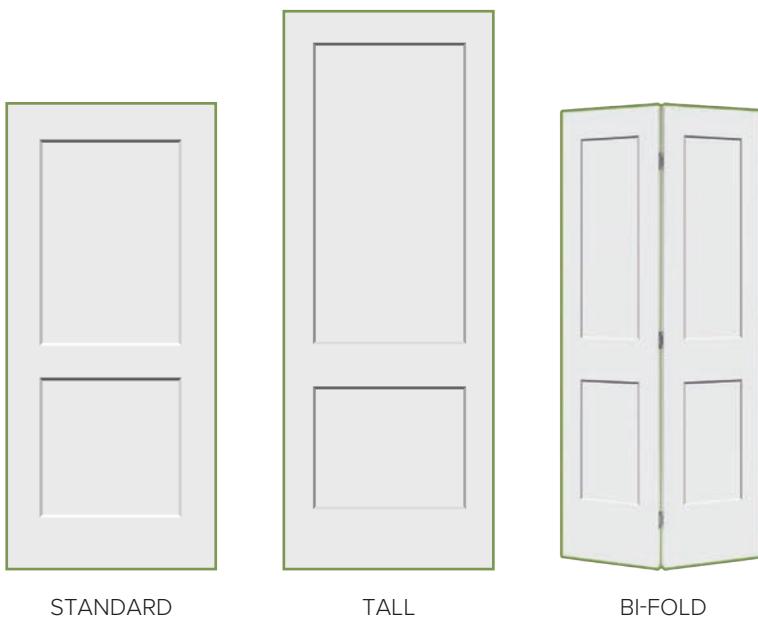


STANDARD

TALL


BI-FOLD

STANDARD WIDTH	STANDARD			TALL		
	HEIGHT	6/8	7/0	8/0		
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0	HC					
1/2	HC					
1/3	HC					
1/4	HC					
1/6	SC/HC		HC		SC/HC	
1/8	HC					
1/10	HC					
2/0	SC/HC		HC		SC/HC	
2/2	HC					
2/4	SC/HC		HC		SC/HC	
2/6	SC/HC		HC		SC/HC	
2/8	SC/HC	SC	HC		SC/HC	SC
2/10	SC/HC					
3/0	SC/HC	SC	HC		SC/HC	SC


6/8
1-3/8"
BI-FOLD SIZES
2 DOOR
2/0 SC/HC
2/4
2/6 SC/HC
2/8
3/0 SC/HC
4 DOOR
4/0 SC/HC
4/8
5/0 SC/HC
5/4
6/0 SC/HC

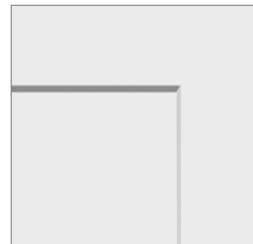

PANEL DETAIL

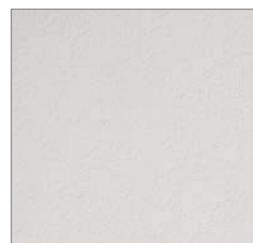

SMOOTH SURFACE

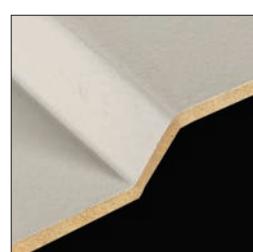

CRAFTSMAN STICKING

SC = Solid Particle Core / HC = Hollow Core



# Cambrian



STANDARD



TALL



BI-FOLD

		STANDARD			TALL		
HEIGHT		6/8	7/0		8/0		
THICKNESS		1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES							
STANDARD WIDTH	1/0	SC/HC		SC/HC		SC/HC	
	1/2	SC/HC				SC/HC	
	1/3	SC/HC		SC/HC		SC/HC	
	1/4	SC/HC		SC/HC		SC/HC	
	1/6	SC/HC	SC	SC/HC	SC	SC/HC	SC
	1/8	SC/HC		SC/HC		SC/HC	
	1/10	SC/HC		SC/HC		SC/HC	
	2/0	SC/HC	SC	SC/HC	SC	SC/HC	SC
	2/2	SC/HC		SC/HC		SC/HC	
	2/4	SC/HC	SC	SC/HC	SC	SC/HC	SC
	2/6	SC/HC	SC	SC/HC	SC	SC/HC	SC
	2/8	SC/HC	SC	SC/HC	SC	SC/HC	SC
	2/10	SC/HC	SC	SC/HC	SC	SC/HC	SC
	3/0	SC/HC	SC	SC/HC	SC	SC/HC	SC

6/8	
1-3/8"	
BI-FOLD SIZES	
<b>2 DOOR</b>	
2/0	SC/HC
2/4	HC
2/6	SC/HC
2/8	HC
3/0	SC HC
<b>4 DOOR</b>	
4/0	SC/HC
4/8	HC
5/0	SC/HC
5/4	HC
6/0	SC/HC



PANEL DETAIL



SMOOTH SURFACE



COVE & BEAD STICKING

# Connelly



STANDARD



TALL




BI-FOLD

STANDARD WIDTH	STANDARD			TALL		
	6/8	7/0	8/0	6/8	7/0	8/0
HEIGHT	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0	SC/HC					
1/2	SC/HC					
1/3	SC/HC					
1/4	SC/HC					
1/6	SC/HC	SC	SC/HC	SC	SC/HC	SC
1/8	SC/HC		SC/HC		SC/HC	
1/10	SC/HC		SC/HC		SC/HC	
2/0	SC/HC	SC	SC/HC	SC	SC/HC	SC
2/2	SC/HC		SC/HC		SC/HC	
2/4	SC/HC	SC	SC/HC	SC	SC/HC	SC
2/6	SC/HC	SC	SC/HC	SC	SC/HC	SC
2/8	SC/HC	SC	SC/HC	SC	SC/HC	SC
2/10	SC/HC	SC	SC/HC	SC	SC/HC	SC
3/0	SC/HC	SC	SC/HC	SC	SC/HC	SC

6/8	
1-3/8"	
BI-FOLD SIZES	
<b>2 DOOR</b>	
2/0	SC/HC
2/4	HC
2/6	SC/HC
2/8	HC
3/0	SC/HC
<b>4 DOOR</b>	
4/0	SC/HC
4/8	HC
5/0	SC/HC
5/4	HC
6/0	SC/HC



PANEL DETAIL

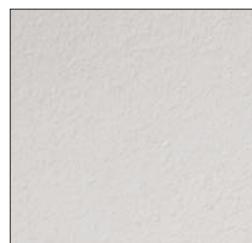

SMOOTH SURFACE



COVE & BEAD STICKING

# Sandhurst



STANDARD



TALL




BI-FOLD



PANEL DETAIL

		STANDARD			TALL	
HEIGHT	6/8	7/0	8/0			
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
STANDARD WIDTH	1/0	SC/HC				
	1/2	SC/HC				
	1/3	SC/HC				
	1/4	SC/HC				
	1/6	SC/HC	SC	SC/HC	SC/HC	
	1/8	SC/HC		SC/HC	SC/HC	
	1/10	SC/HC				
	2/0	SC/HC	SC	SC/HC	SC/HC	
	2/2	SC/HC				
	2/4	SC/HC	SC	SC/HC	SC/HC	
	2/6	SC/HC	SC	SC/HC	SC	SC
	2/8	SC/HC	SC	SC/HC	SC	SC
	2/10	SC/HC	SC			
	3/0	SC/HC	SC	SC/HC	SC/HC	SC


6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	SC/HC
2/4	HC
2/6	SC/HC
2/8	HC
3/0	SC/HC
4 DOOR	
4/0	SC/HC
4/8	HC
5/0	SC/HC
5/4	HC
6/0	SC/HC

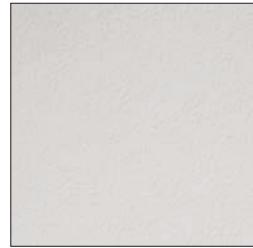

SMOOTH SURFACE



OVOLIO STICKING

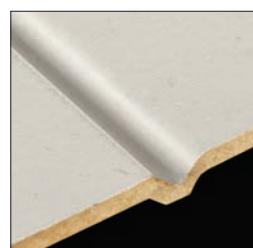

V-GROOVE PLANK

# Camdale



STANDARD



BI-FOLD

HEIGHT	STANDARD			TALL		
	6/8	7/0	8/0			
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0	SC/HC					
1/2	SC/HC					
1/3	SC/HC					
1/4	SC/HC					
1/6	SC/HC					
1/8	SC/HC					
1/10	SC/HC					
2/0	SC/HC					
2/2	SC/HC					
2/4	SC/HC					
2/6	SC/HC	SC				
2/8	SC/HC	SC				
2/10	SC/HC					
3/0	SC/HC	SC				

6/8	
1-3/8"	
BI-FOLD SIZES	
<b>2 DOOR</b>	
2/0	SC/HC
2/4	HC
2/6	SC/HC
2/8	HC
3/0	SC/HC
<b>4 DOOR</b>	
4/0	SC/HC
4/8	HC
5/0	SC/HC
5/4	HC
6/0	SC/HC



PANEL DETAIL



TEXTURED SURFACE




COVE & BEAD STICKING

SC = Solid Particle Core / HC = Hollow Core /  = No Standard Bore Possible





# Crayburn

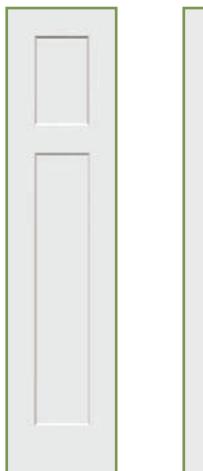

NARROW



STANDARD



BI-FOLD

	STANDARD			TALL	
HEIGHT	6/8		7/0		8/0
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"
DOOR SIZES					
NARROW WIDTH	1/0	SC/HC		SC/HC	
	1/2	SC/HC		SC/HC	
	1/3	SC/HC		SC/HC	
	1/4	SC/HC		SC/HC	
	1/6	SC/HC	SC	SC/HC	
	1/8	SC/HC		SC/HC	
	1/10	SC/HC		SC/HC	
STANDARD WIDTH	2/0	SC/HC	SC	SC/HC	
	2/2	SC/HC		SC/HC	
	2/4	SC/HC	SC	SC/HC	
	2/6	SC/HC	SC	SC/HC	SC
	2/8	SC/HC	SC	SC/HC	SC
	2/10	SC/HC	SC	SC/HC	
	3/0	SC/HC	SC	SC/HC	SC

6/8

1-3/8"

BI-FOLD SIZES

2 DOOR

2/0 SC/HC

2/4

2/6 SC/HC

2/8

3/0 SC/HC

4 DOOR


4/0 SC/HC

4/8


5/0 SC/HC

5/4


6/0 SC/HC

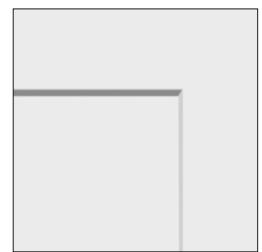

PANEL DETAIL

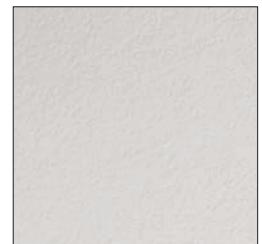

SMOOTH SURFACE

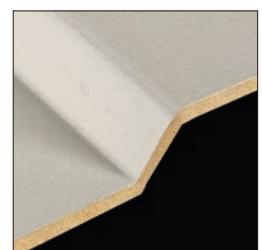

CRAFTSMAN STICKING

SC = Solid Particle Core / HC = Hollow Core /  = No Standard Bore Possible



# Conmivo




STANDARD



BI-FOLD

HEIGHT	STANDARD			TALL	
	6/8	7/0	8/0		
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"
DOOR SIZES					
STANDARD WIDTH	1/0	SC/HC			
	1/2	SC/HC			
	1/3	SC/HC			
	1/4	SC/HC			
	1/6	SC/HC		SC/HC	
	1/8	SC/HC		SC/HC	
	1/10	SC/HC			
	2/0	SC/HC		SC/HC	
	2/2	SC/HC			
	2/4	SC/HC		SC/HC	
	2/6	SC/HC	SC	SC/HC	
	2/8	SC/HC	SC	SC/HC	
	2/10	SC/HC			
	3/0	SC/HC	SC	SC/HC	

6/8
1-3/8"
<b>BI-FOLD SIZES</b>
<b>2 DOOR</b>
2/0 SC/HC
2/4
2/6 SC/HC
2/8
3/0 SC/HC
<b>4 DOOR</b>
4/0 SC/HC
4/8
5/0 SC/HC
5/4
6/0 SC/HC



PANEL DETAIL



SMOOTH SURFACE



STEP STICKING

# Rochele



STANDARD



TALL



BI-FOLD

HEIGHT	STANDARD			TALL		
	6/8	7/0	8/0			
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
STANDARD WIDTH	1/0	SC/HC				
	1/2	SC/HC				
	1/3	SC/HC				
	1/4	SC/HC				
	1/6	SC/HC	SC	SC/HC		SC/HC
	1/8	SC/HC		SC/HC		SC/HC
	1/10	SC/HC				SC/HC
	2/0	SC/HC	SC	SC/HC		SC/HC
	2/2	SC/HC				SC/HC
	2/4	SC/HC	SC	SC/HC		SC/HC
	2/6	SC/HC	SC	SC/HC	SC	SC
	2/8	SC/HC	SC	SC/HC	SC	SC
	2/10	SC/HC	SC			SC/HC
	3/0	SC/HC	SC	SC/HC	SC	SC

6/8
1-3/8"
<b>BI-FOLD SIZES</b>
<b>2 DOOR</b>
2/0 SC/HC
2/4 HC
2/6 SC/HC
2/8 HC
3/0 SC/HC
<b>4 DOOR</b>
4/0 SC/HC
4/8 HC
5/0 SC/HC
5/4 HC
6/0 SC/HC



PANEL DETAIL



SMOOTH SURFACE



COVE & BEAD STICKING



# Colburn - Smooth



NARROW



STANDARD




TALL



BI-FOLD

	STANDARD			TALL		
HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
NARROW WIDTH	1/0	SC/HC		SC/HC		SC/HC
	1/2	SC/HC		SC/HC		SC/HC
	1/3	SC/HC		SC/HC		SC/HC
	1/4	SC/HC		SC/HC		SC/HC
	1/6	SC/HC	SC	SC/HC	SC	SC/HC
	1/8	SC/HC		SC/HC		SC/HC
STANDARD WIDTH	1/10	SC/HC		SC/HC		SC/HC
	2/0	SC/HC	SC	SC/HC	SC	SC/HC
	2/2	SC/HC		SC/HC		SC/HC
	2/4	SC/HC	SC	SC/HC	SC	SC/HC
	2/6	SC/HC	SC	SC/HC	SC	SC/HC
	2/8	SC/HC	SC	SC/HC	SC	SC/HC
	2/10	SC/HC	SC	SC/HC	SC	SC/HC
	3/0	SC/HC	SC	SC/HC	SC	SC/HC

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	SC/HC
2/4	HC
2/6	SC/HC
2/8	HC
3/0	SC/HC
4 DOOR	
4/0	SC/HC
4/8	HC
5/0	SC/HC
5/4	HC
6/0	SC/HC



PANEL DETAIL



SMOOTH SURFACE



COVE & BEAD STICKING

# Colburn - Textured



NARROW



STANDARD



TALL



BI-FOLD

	STANDARD			TALL	
HEIGHT	6/8		7/0		8/0
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"
DOOR SIZES					
NARROW WIDTH	1/0	SC/HC			
	1/2	SC/HC			
	1/3	SC/HC			
	1/4	SC/HC			HC
	1/6	SC/HC			HC
	1/8	SC/HC			HC
STANDARD WIDTH	1/10	SC/HC		SC/HC	HC
	2/0	SC/HC		SC/HC	HC
	2/2	SC/HC		SC/HC	HC
	2/4	SC/HC		SC/HC	HC
	2/6	SC/HC	SC	SC/HC	HC
	2/8	SC/HC	SC	SC/HC	HC
	2/10	SC/HC		SC/HC	HC
	3/0	SC/HC	SC	SC/HC	HC

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	SC/HC
2/4	HC
2/6	SC/HC
2/8	HC
3/0	SC/HC
4 DOOR	
4/0	SC/HC
4/8	HC
5/0	SC/HC
5/4	HC
6/0	SC/HC



PANEL DETAIL



TEXTURED SURFACE



COVE & BEAD STICKING





# Layouts

MASONITE MOLDED DOORS						
	LINCOLN PARK® <sup>†</sup>	LOGAN <sup>†</sup>	WINSLOW <sup>†</sup>	BAYSHORE <sup>†</sup>	CHEYENNE®	RIVERSIDE®
LAYOUT	1 PANEL	2 PANEL	3 PANEL	5 PANEL	2 PANEL	5 PANEL
PANEL TYPE	Flat Panel	Flat Panel	Flat Panel	Flat Panel	Beaded Plank	Raised Panel
SURFACE	Smooth	Smooth	Smooth	Smooth	Smooth	Smooth
STICKING	Craftsman	Craftsman	Craftsman	Craftsman	Cheyenne	Riverside

SOLID PARTICLE CORE						
HEIGHT	6/8, 7/0, 8/0	6/8	6/8	6/8	6/8	6/8
THICKNESS	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"	1-3/8", 1-3/4"
FIRE RATING*	20 Minute					


HOLLOW CORE						
HEIGHT	6/8, 7/0	6/8, 7/0	6/8	6/8	6/8	6/8
THICKNESS	1-3/8"	1-3/8"	1-3/8"	1-3/8"	1-3/8"	1-3/8"
FIRE RATING	None	None	None	None	None	None

PAGE	32	33	34	35	36	37
------	----	----	----	----	----	----

\* Fire Rating Only Applicable to 1-3/4" Doors

† This door style is ADA compliant with a 10" bottom rail.

# Solid Particle Core Construction

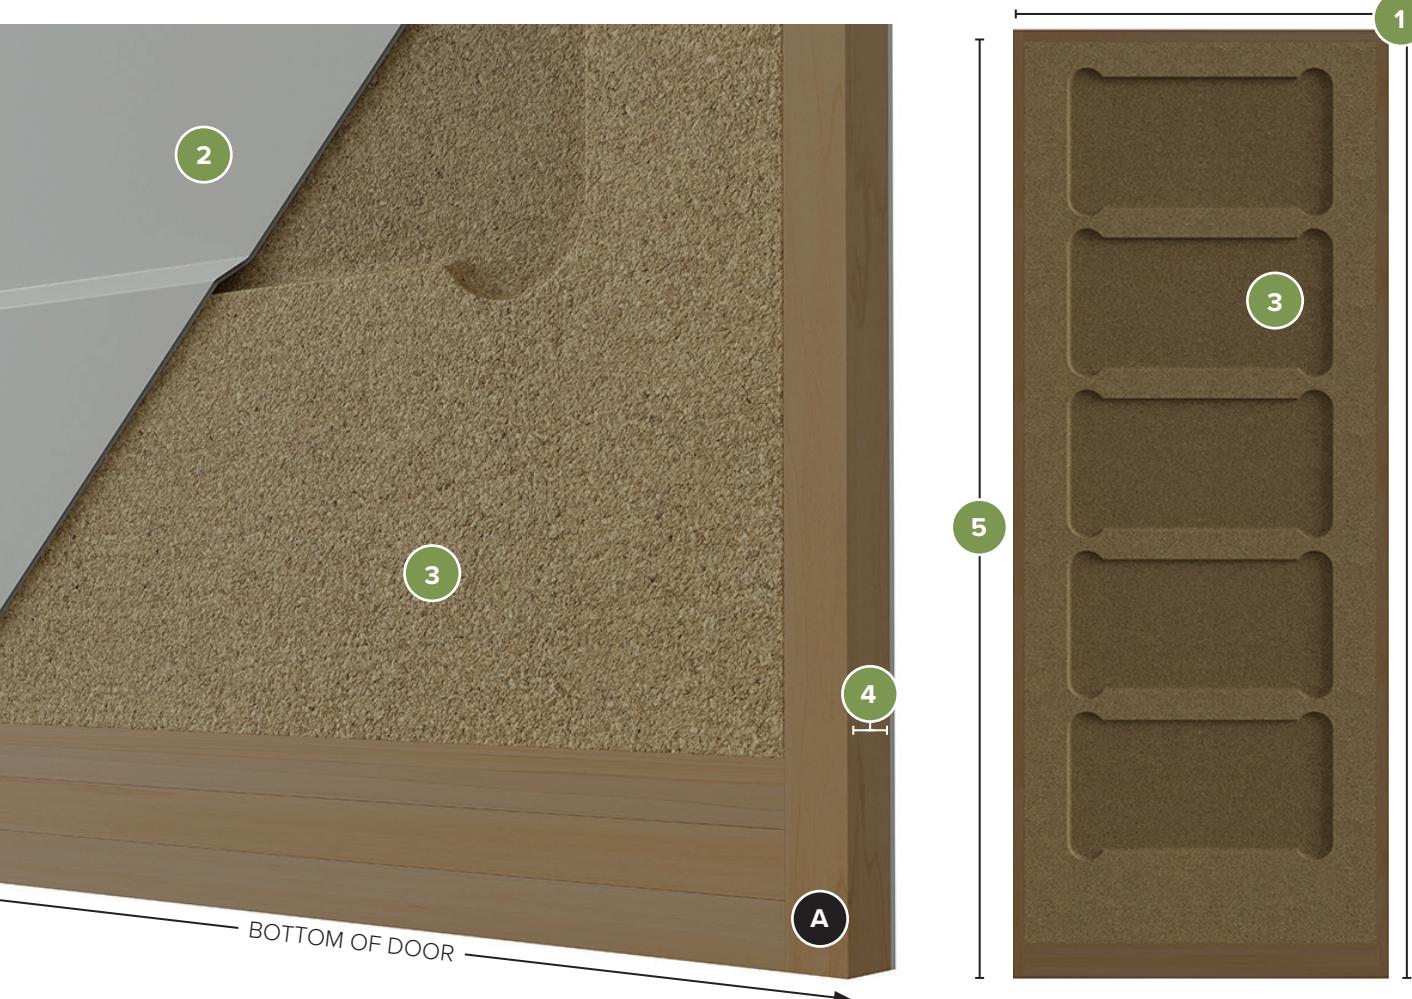

## 1 Wood Stiles & Rails

Made of solid wood for extra screw holding power

## 2 Face

1/8" molded smooth hardboard skin

## 3 Core

Solid particle board core routed to match molded skin design

## 4 Thickness

Available in 1-3/8" & 1-3/4"

## 5 Height

Available in 6/8, 7/0 & 8/0

## A Wood Rail

Field-trimming can affect fire ratings. To ensure proper ratings, doors must be factory trimmed by Reeb®.

### Rail - 6/8 height, 1-3/8" thickness doors

1" top and 3" bottom rail

### Rail - 6/8 height, 1-3/4" thickness doors

1" top rail and 2" bottom rail, allowing the door to be field-trimmed up to 1"

### Rail - 7/0 & 8/0 height

All 7/0 and 8/0 height doors have a 1" top rail and 3" bottom rail




Solid Particle Core (SC) molded doors are used in a variety of residential and light commercial interior applications. The advantages of solid particle core construction are added security, reduced sound transmission, and a fire rating of up to 20 minute (1-3/4" Doors Only). The solid construction gives the door a heavier weight and the feel is similar to an interior wood stile and rail door. Reeb® offers a wide variety of designs with a smooth surface.

## Panel Options



RAISED PANEL

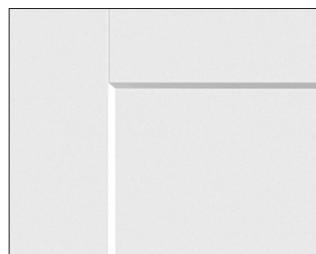


FLAT PANEL



BEADED PLANK PANEL


## Surface Option

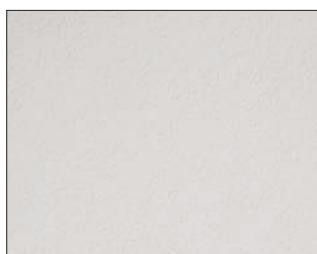

SMOOTH SURFACE



CHEYENNE STICKING

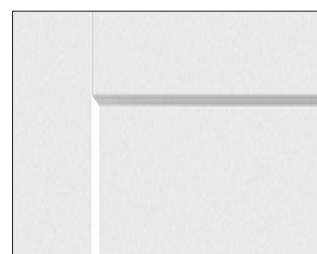


CRAFTSMAN STICKING

## Sticking Options



RIVERSIDE STICKING

# Hollow Core Construction

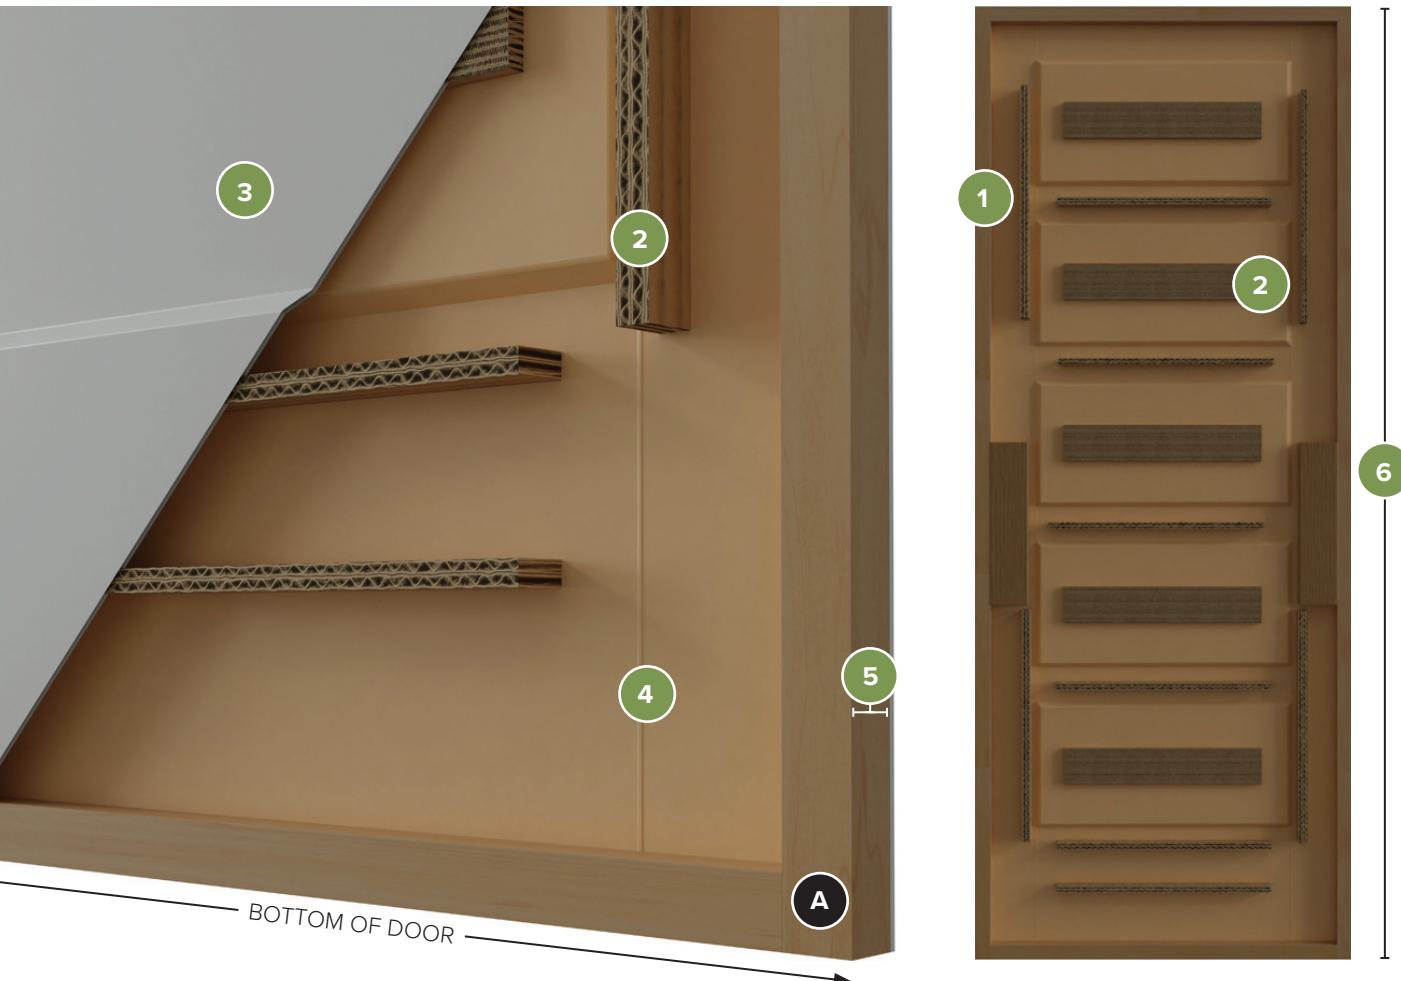

**1** Fiber or Wood Stile

**2** Blocking

Provides support for door faces

**3** Face

1/8" molded smooth hardboard skin

**4** Core

Hollow core is comprised of corrugated board and foam

**5** Thickness

Available in 1-3/8" Only

**6** Height

Available in 6/8, 7/0 & 8/0

**A** Fiber Rail

**Rail - 6/8 height, 1-3/8" thickness doors**

1" Fiber top and bottom rail. Cannot be field-trimmed without reblocking

**Stile - 6/8 height, 1-3/8" thickness doors**

Fiber Stile


**Stile - 7/0 & 8/0 height, 1-3/8" thickness doors**

Wood Stile




Hollow Core molded doors offer a lighter-weight, economic alternative to wood stile and rail interior doors. Available in a variety of designs with a smooth surface.

## Panel Options

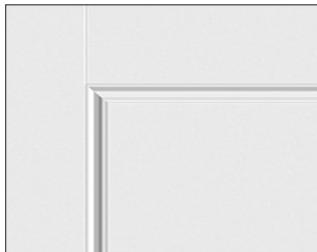

RAISED PANEL

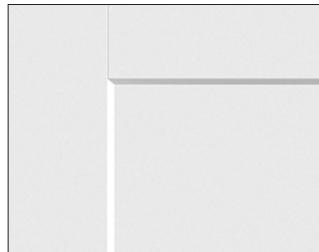


FLAT PANEL



BEADED PLANK PANEL

## Surface Option

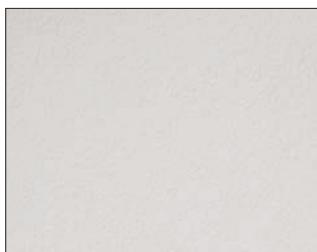

SMOOTH SURFACE

## Sticking Options



CHEYENNE STICKING




CRAFTSMAN STICKING




RIVERSIDE STICKING

# Lincoln Park®

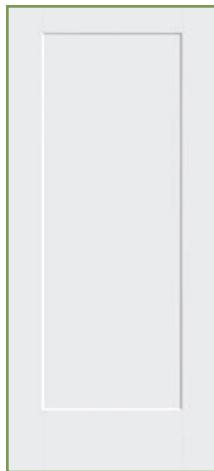

STANDARD

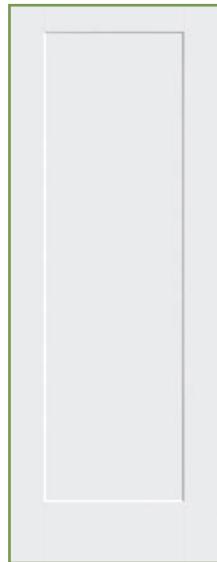

TALL



BI-FOLD

STANDARD WIDTH	STANDARD			TALL		
	HEIGHT	6/8	7/0	8/0		
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0						
1/2						
1/3						
1/4						
1/6	SC/HC		SC/HC		SC	
1/8						
1/10						
2/0	SC/HC	SC	SC/HC		SC	
2/2						
2/4	SC/HC	SC	SC/HC		SC	
2/6	SC/HC	SC	SC/HC		SC	
2/8	SC/HC	SC	SC/HC		SC	
2/10	SC/HC	SC	SC/HC		SC	
3/0	SC/HC	SC	SC/HC		SC	

This door style is ADA compliant with a 10" bottom rail.

6/8	
BI-FOLD SIZES	
<b>2 DOOR</b>	
2/0	HC
2/4	
2/6	HC
2/8	
3/0	HC
<b>4 DOOR</b>	
4/0	HC
4/8	
5/0	HC
5/4	
6/0	HC



PANEL DETAIL



SMOOTH SURFACE



CRAFTSMAN STICKING

# Logan®



STANDARD



BI-FOLD

STANDARD WIDTH	STANDARD			TALL		
	HEIGHT	6/8	7/0	8/0		
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0						
1/2						
1/3						
1/4						
1/6	SC/HC		HC			
1/8						
1/10						
2/0	SC/HC	SC	HC			
2/2						
2/4	SC/HC	SC	HC			
2/6	SC/HC	SC	HC			
2/8	SC/HC	SC	HC			
2/10	SC/HC	SC	HC			
3/0	SC/HC	SC	HC			

This door style is ADA compliant with a 10" bottom rail.

6/8
1-3/8"
BI-FOLD SIZES
2 DOOR
2/0 HC
2/4
2/6 HC
2/8
3/0 HC
4 DOOR
4/0 HC
4/8
5/0 HC
5/4
6/0 HC



PANEL DETAIL



SMOOTH SURFACE



CRAFTSMAN STICKING

SC = Solid Particle Core / HC = Hollow Core

# Winslow®



STANDARD




BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0						
1/2						
1/3						
1/4						
1/6	SC/HC					
1/8						
1/10						
2/0	SC/HC	SC				
2/2						
2/4	SC/HC	SC				
2/6	SC/HC	SC				
2/8	SC/HC	SC				
2/10	SC/HC	SC				
3/0	SC/HC	SC				

This door style is ADA compliant with a 10" bottom rail.

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	HC
2/4	
2/6	HC
2/8	
3/0	HC
4 DOOR	
4/0	HC
4/8	
5/0	HC
5/4	
6/0	HC

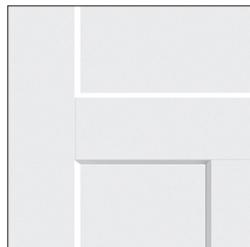

PANEL DETAIL



SMOOTH SURFACE



CRAFTSMAN STICKING

# Bayshore



STANDARD




BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0						
1/2						
1/3						
1/4						
1/6	SC/HC					
1/8						
1/10						
2/0	SC/HC	SC				
2/2						
2/4	SC/HC	SC				
2/6	SC/HC	SC				
2/8	SC/HC	SC				
2/10	SC/HC	SC				
3/0	SC/HC	SC				

This door style is ADA compliant with a 10" bottom rail.

6/8
1-3/8"
BI-FOLD SIZES
2 DOOR
2/0 HC
2/4
2/6 HC
2/8
3/0 HC
4 DOOR
4/0 HC
4/8
5/0 HC
5/4
6/0 HC

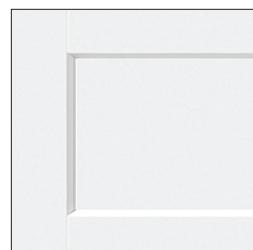

PANEL DETAIL



SMOOTH SURFACE



CRAFTSMAN STICKING

# Cheyenne®



STANDARD



BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0						
1/2						
1/3						
1/4						
☒ 1/6	SC/HC					
1/8						
1/10						
2/0	SC/HC	SC				
2/2						
2/4	SC/HC	SC				
2/6	SC/HC	SC				
2/8	SC/HC	SC				
2/10	SC/HC	SC				
3/0	SC/HC	SC				

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	HC
2/4	
2/6	HC
2/8	
3/0	HC
4 DOOR	
4/0	HC
4/8	
5/0	HC
5/4	
6/0	HC



PANEL DETAIL



SMOOTH SURFACE



CHEYENNE STICKING

# Riverside®



STANDARD



BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
1/0						
1/2						
1/3						
1/4						
1/6	SC/HC					
1/8						
1/10						
2/0	SC/HC	SC				
2/2						
2/4	SC/HC	SC				
2/6	SC/HC	SC				
2/8	SC/HC	SC				
2/10	SC/HC	SC				
3/0	SC/HC	SC				

6/8
1-3/8"
BI-FOLD SIZES
<b>2 DOOR</b>
2/0 HC
2/4
2/6 HC
2/8
3/0 HC
<b>4 DOOR</b>
4/0 HC
4/8
5/0 HC
5/4
6/0 HC



PANEL DETAIL



SMOOTH SURFACE



RIVERSIDE STICKING

SC = Solid Particle Core / HC = Hollow Core

# Flush Doors

## Solid Particle Core (SC)

Solid, heavy construction - feels like real wood. Wood bottom rail for added durability and ease of trimming.

Note: Field-trimming can affect fire ratings. To ensure proper ratings, doors must be factory-trimmed by Reeb®.



### Stile

Wood stiles for additional screw holding power

### Rail - 6/8, 7/0 & 8/0 height, 1-3/8" doors

1" top rail and 1" bottom rail, no field trimming

### Rail - 6/8 height, 1-3/4" doors

1" top rail and 2" bottom rail, allowing the door to be field-trimmed up to 1"

### Core

Solid Particle Core manufactured for up to 20-minute fire label requirements

### Face

1/8" face consisting of a 1/64" veneer affixed to an MDF substrate

### Height

Available in 6/8, 7/0 & 8/0

### Finish

Available in Primed Hardboard, Lauan, Birch and Oak

### Thickness

Available in 1-3/8" & 1-3/4"

### Sound Benefits

Reduced Sound Transmission

### Fire Rating

Up to 20 Minutes (1-3/4" only)

## Solid Wood Core (WC)

Heaviest, most durable construction.



### Stile

Wood stiles for additional screw holding power

### Rail - 6/8 & 7/0 heights, 1-3/8" & 1-3/4" doors

1" wood top rail and 2" wood bottom rail, allowing the door to be trimmed up to 1"

### Core

Structural composite lumber

### Face

1/8" face consisting of a 1/64" veneer affixed to an MDF substrate

### Height

6/8 & 7/0

### Finish

Available in Birch and Oak

### Thickness

Available in 1-3/8" & 1-3/4"

### Sound Benefits

Reduced Sound Transmission

# Hollow Core (HC)

Lighter weight, economic alternative.



## Stile

Wood stiles

## Rail - 6/8, 7/0 & 8/0 height, 1-3/8" doors

1" fiber top rail and 1" fiber bottom rail, no field trimming

## Core

Honeycomb blocking

## Face

1/8" face consisting of a 1/64" veneer affixed to an MDF substrate

## Height

Available in 6/8, 7/0 & 8/0

## Finish

Available in Primed Hardboard, Lauan, Birch and Oak

## Thickness

Available in 1-3/8" & 1-3/4"



# Flush Primed




STANDARD



BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
STANDARD WIDTH	1/0	SC/HC	SC/HC	SC/HC	SC/HC	
	1/2	SC/HC	SC/HC	SC/HC	SC/HC	
	1/3	SC/HC	SC/HC	SC/HC	SC/HC	
	1/4	SC/HC	SC/HC	SC/HC	SC/HC	
	1/6	SC/HC	SC/HC	SC/HC	SC/HC	SC/HC
	1/8	SC/HC	SC/HC	SC/HC	SC/HC	
	1/10	SC	SC	SC/HC	SC/HC	
	2/0	SC/HC	SC/HC	SC/HC	SC/HC	SC/HC
	2/2	SC	SC	SC/HC	SC/HC	
	2/4	SC/HC	SC/HC	SC/HC	SC/HC	SC/HC
	2/6	SC/HC	SC/HC	SC/HC	SC/HC	SC/HC
	2/8	SC/HC	SC/HC	SC/HC	SC/HC	SC/HC
	2/10	SC	SC	SC/HC	SC/HC	SC
	3/0	SC/HC	SC/HC	SC/HC	SC/HC	SC/HC

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	HC
2/4	HC
2/6	HC
2/8	HC
3/0	HC
4 DOOR	
4/0	HC
4/8	HC
5/0	HC
5/4	HC
6/0	HC

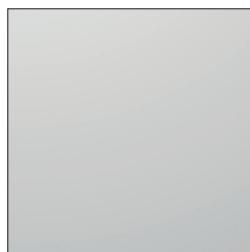

CLOSE UP

# Flush Lauan



STANDARD



BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
STANDARD WIDTH	1/0	SC/HC		HC		HC
	1/2	SC/HC		HC		HC
	1/3	SC/HC		HC		HC
	1/4	SC/HC		HC		HC
	1/6	SC/HC		SC/HC		HC
	1/8	SC/HC		SC/HC		HC
	1/10	SC/HC		HC		HC
	2/0	SC/HC	SC/HC	SC/HC	SC	HC
	2/2	SC/HC	SC	HC	SC	HC
	2/4	SC/HC	SC	SC/HC	SC	HC
	2/6	SC/HC	SC/HC	SC/HC	SC	HC
	2/8	SC/HC	SC/HC	SC/HC	SC	HC
	2/10	SC/HC	SC	HC	SC	HC
	3/0	SC/HC	SC/HC	SC/HC	SC/HC	HC

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	HC
2/4	HC
2/6	HC
2/8	HC
3/0	HC
4 DOOR	
4/0	HC
4/8	HC
5/0	HC
5/4	HC
6/0	HC



CLOSE UP

HC Flush Lauan 1-3/8" doors are also stocked in 6/0 and 6/6 heights.

# Flush Birch



STANDARD



BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
<b>DOOR SIZES</b>						
1/0	SC/HC	SC/HC	SC/HC	SC/HC		SC/HC
1/2	SC/HC	SC/HC	SC/HC	SC/HC		SC/HC
1/3	SC/HC	SC/HC	SC/HC	SC/HC		SC/HC
1/4	SC/HC	SC/HC	SC/HC	SC/HC		SC/HC
1/6	SC/HC	SC/HC	SC/HC	SC/HC	SC	SC/HC
1/8	SC/HC	SC/HC	SC/HC	SC/HC		SC/HC
1/10	SC/HC	SC/HC	SC/HC	SC/HC		SC/HC
2/0	SC/HC/WC	SC/HC/WC	SC/HC	SC/HC/WC	SC/HC	SC/HC
2/2	SC/HC	SC/HC	SC/HC	SC/HC	HC	SC/HC
2/4	SC/HC/WC	SC/HC/WC	SC/HC	SC/HC/WC	SC/HC	SC/HC
2/6	SC/HC/WC	SC/HC/WC	SC/HC	SC/HC/WC	SC/HC	SC/HC
2/8	SC/HC/WC	SC/HC/WC	SC/HC	SC/HC/WC	SC/HC	SC/HC
2/10	SC/HC	SC/HC/WC	SC/HC	SC/HC/WC	HC	SC/HC
3/0	SC/HC/WC	SC/HC/WC	SC/HC	SC/HC/WC	SC/HC	SC/HC
3/4		WC		WC		
3/6	SC/HC	SC/HC/WC		SC/HC/WC		SC/HC
3/8				WC		
4/0		WC		WC		

6/8	
1-3/8"	
BI-FOLD SIZES	
<b>2 DOOR</b>	
2/0	HC
2/4	HC
2/6	HC
2/8	HC
3/0	HC
<b>4 DOOR</b>	
4/0	HC
4/8	HC
5/0	HC
5/4	HC
6/0	HC



CLOSE UP

HC Flush Birch 1-3/8" doors are also stocked in 6/0 and 6/6 heights.



# Flush Oak



STANDARD



BI-FOLD

HEIGHT	6/8		7/0		8/0	
THICKNESS	1-3/8"	1-3/4"	1-3/8"	1-3/4"	1-3/8"	1-3/4"
DOOR SIZES						
STANDARD WIDTH	1/0	HC				
	1/2	HC				
	1/3	HC				
	1/4	HC				
	1/6	SC/HC				
	1/8	SC/HC				
	1/10	SC/HC				
	2/0	SC/HC	SC			
	2/2	SC/HC				
	2/4	SC/HC	SC			
	2/6	SC/HC	SC/WC	SC/WC		
	2/8	SC/HC	SC/WC	SC/WC		
	2/10	SC/HC	SC			
	3/0	SC/HC	SC/WC		SC/WC	

6/8	
1-3/8"	
BI-FOLD SIZES	
2 DOOR	
2/0	HC
2/4	HC
2/6	HC
2/8	HC
3/0	HC
4 DOOR	
4/0	HC
4/8	HC
5/0	HC
5/4	HC
6/0	HC



CLOSE UP

SC = Solid Particle Core / HC = Hollow Core / WC = Solid Wood Core



# Jambs

The frames are the component of a pre-hung unit to which the door is affixed. They are available in a variety of species and either paintable or stainable options to match the door.

Please check with your local dealer for availability.



# Fire Door Frames

Fire-rated doors are often used for house-to-garage applications or as entrances to multi-family dwellings. If a fire-rating is desired, it is important to use fire-rated frames. All stock 20 minute fire door frames are available in 4-9/16", 5-1/4", or 6-9/16" widths, and include weatherstrips. Other widths are available upon request.



# Frame Profiles

Flat frames are a popular choice and are often accompanied by a stop. Split frames are adjustable to fit a range of frame widths. Frame options are based on your location and market.

Please check with your local dealer for availability.




Flat Frame Profile



Flat Frame with Colonial Stop



Flat Frame with Rounded One Edge Stop



Split Frame Profile

# Hinges

Hinges allow the door to open and close. For increased durability and smooth operation, it is recommended to use ball bearing hinges for heavier doors, such as solid particle core doors. When using a standard 1-3/8" thick door, a 3-1/2" x 3-1/2" hinge is typically used. When using a 1-3/4" thick door, a 4" x 4" hinge is typically used.



Non-Ball Bearing Square



Non-Ball Bearing Radius

Non-Ball Bearing Hinges	US1D	US3	US4B	US5	US10B	US15	US26	US26D
3-1/2" x 3-1/2" RSP Square	✓	✓		✓	✓	✓	✓	✓
3-1/2" x 3-1/2" RSP Radius	✓	✓	✓	✓	✓	✓	✓	✓
4" x 4" RSP Square	✓	✓		✓	✓	✓	✓	✓
4" x 4" RSP Radius	✓	✓	✓	✓	✓	✓	✓	✓



Ball Bearing Square



Ball Bearing Radius

Ball Bearing Hinges	US1D	US3	US4B	US5	US10B	US15	US26	US26D
3-1/2" x 3-1/2" RSP Square		✓	✓	✓	✓	✓	✓	✓
3-1/2" x 3-1/2" RSP Radius	✓	✓	✓	✓	✓	✓	✓	✓
4" x 4" RSP Square	✓	✓	✓	✓	✓	✓	✓	✓
4" x 4" RSP Radius	✓	✓	✓	✓	✓	✓	✓	✓

## Fire Door Hinges

When completing a fire-rated unit, it is important to utilize self-closing or commercial hinges.



4" x 4"  
Self-Closing  
Hinge

4" Self Closing Hinges	US1D	US3	US4B	US10B	US15	US26	US26D
4" x 4"	✓	✓	✓	✓	✓	✓	✓



4-1/2" x 4-1/2"  
Commercial  
Hinge

4-1/2" Commercial Hinges	US1D	US3	US4B	US10B	US26	US26D
4-1/2" x 4-1/2"	✓	✓	✓	✓	✓	✓
4-1/2" x 4-1/2" Ball Bearing		✓		✓	✓	✓

## Available Finishes



**US1D**  
Flat Black



**US3**  
Bright Brass




**US4B**  
Bright Satin  
Brass



**US5**  
Antique Brass



**US10B**  
Oil Rubbed  
Bronze



**US15**  
Satin Nickel



**US26**  
Bright Chrome



**US26D**  
Satin Chrome

# Hardware

Locksets are available in either a knob or lever style and provide tough, reliable performance and enduring style. They are available in multiple finishes to match the hinges used on the door.

## Standard Residential Series Locks



**Flair**

Shown in US10B



**Accent**

Shown in US15



**Plymouth**

Shown in US15

## Builder's Series Locks



**LaSalle**

Shown in US3



**Torino**

Shown in US15



**Corona**

Shown in US26

## Available Finishes



**US3**

Bright Brass



**US5**

Antique Brass



**US10B**

Oil Rubbed  
Bronze



**US15**

Satin Nickel



**US26**

Bright Chrome



**US26D**

Satin Chrome



**US92**

Aluminum

# Catches

Catches are an alternative way to close a door and are often used in a closet application. Ball catches and Roller catches are recessed in the top of the door while a Surface Magnetic Catch is installed on the face of the door. A strike is installed on the head jamb and the two keep the door closed without the need of a latch. The Concealed Magnetic Catch is recessed into the top of the door and the head jamb which conceals the catch.

## Precision™

### Concealed Magnetic Catch




CATCHES	US1D	US3	US5	US10B	US15	US26	US26D	US92
Reeb® Specialty Products Ball Catch		✓	✓	✓	✓	✓	✓	✓
Ives® Surface Magnetic Catch		✓						✓
Ives® Roller Catch		✓		✓	✓	✓		

# Barn Door Track Hardware




Goldberg's line of interior, residential sliding barn door hardware kits makes the most of the available living space, while adding a rustic, yet elegant look. All major components are manufactured from steel and come with a 1-year warranty.\*

## AVAILABLE FINISHES



BLACK



SILVER



STAINLESS  
STEEL



ARCHITECTURAL  
BRONZE

## STYLE OPTIONS



7" PULL  
HANDLE



PRIVACY  
LATCH



6" FLUSH  
PULL



ROLLER  
HANGER



# Barnfold® Hardware

Due to the wall space required for the long track, sometimes there is no room to install a conventional barn door. Barnfold® Series folding barn door hardware combines the style of the popular J-strap hangers with the space-saving convenience of bifold doors.



BARNFOLD  
J-STRAP  
HANGER




4" PULL  
HANDLE



HINGE

## AVAILABLE FINISH



BLACK

# Warranty

## Handling & Care

Store doors flat on a level surface in a dry, well-ventilated building. Cover to keep clean, but allow air circulation. The utility or structural strength of the door must not be impaired in the fitting of the door, the application of hardware, or cutting and altering the door for lights, louvers, panels or any other special details.

As a general rule, use three hinges for all interior doors. For hollow-core doors weighing less than 50 pounds or under 6/8 in height, two hinges are acceptable. All doors 7/6 or above require four hinges. Allow a fitting clearance of 1/16" on the hinge side and 1/8" on the lock side.

Immediately after fitting or cutting for closure, weatherstrip, and/or threshold and before hanging on the job - any interior or exterior door must receive an application of primer and two coats of high-quality paint, varnish or lacquer on all edges, including the top and bottom. Adequate drying time must be allowed between coats. For job-site finishing, do not use water-thinned paints unless an oil-base prime coat is first applied.

## Hanging

If stops and jambs are not set plumb and in a true plane, jambs are not properly squared, or hinges are not set in a straight line, opening and closing the door will result in stress and cause distortion. Three hinges will restrain distortion better than two, but must be set with greater care to have all three in perfect alignment.

## Finish Requirements

Finish should be applied immediately after fitting, making certain that all six sides are primed and given two coats of paint, varnish or sealer before hanging. In too many instances, the doors are hung prior to finishing, meaning the bottom edge likely receives no paint or sealer. The bottom edge is the most vulnerable point on the door.

## Steves Limited 5 Year Warranty

Steves and Sons warrants all doors sold under their warranty to be free from manufacturing defects in material and workmanship for a period of five (5) years from original date of shipment. This warranty is subject to the limitations and conditions of the full warranty which can be found at [reeb.com/warranties](http://reeb.com/warranties) or [www.stevesdoors.com](http://www.stevesdoors.com).



# Door Index

LAYOUT	HEIGHT	SURFACE	PAGE	STICKING	TOP RAIL	LOCK RAIL	BOTTOM RAIL	VENDOR
MADDOX - 1 PANEL SQUARE TOP	6/8	SMOOTH	14	CRAFTSMAN	4-3/4"	---	8-1/4"	STEVES
MADDOX - 1 PANEL SQUARE TOP	7/0	SMOOTH	14	CRAFTSMAN	6-3/4"	---	10"	STEVES
MADDOX - 1 PANEL SQUARE TOP	8/0	SMOOTH	14	CRAFTSMAN	4-3/4"	---	10"	STEVES
MONTGOMERY - 2 PANEL SQUARE TOP	6/8	SMOOTH	15	CRAFTSMAN	4-3/4"	7"	11-1/8"	STEVES
MONTGOMERY - 2 PANEL SQUARE TOP	7/0	SMOOTH	15	CRAFTSMAN	6-3/4"	7"	12-3/4"	STEVES
MONTGOMERY - 2 PANEL SQUARE TOP	8/0	SMOOTH	15	CRAFTSMAN	4-3/4"	7"	10-7/8"	STEVES
CAMBRIAN - 2 PANEL SQUARE TOP	6/8	SMOOTH	16	COVE & BEAD	6-3/4"	7"	8-3/8"	STEVES
CAMBRIAN - 2 PANEL SQUARE TOP	7/0	SMOOTH	16	COVE & BEAD	6-3/4"	7"	10-3/8"	STEVES
CAMBRIAN - 2 PANEL SQUARE TOP	8/0	SMOOTH	16	COVE & BEAD	6-3/4"	7"	8-3/8"	STEVES
CONNELLY - 2 PANEL ROUND TOP	6/8	SMOOTH	17	COVE & BEAD	6-3/4"	4-3/16"	8-3/8"	STEVES
CONNELLY - 2 PANEL ROUND TOP	7/0	SMOOTH	17	COVE & BEAD	6-3/4"	4-3/16"	10-3/8"	STEVES
CONNELLY - 2 PANEL ROUND TOP	8/0	SMOOTH	17	COVE & BEAD	6-3/4"	4-1/4"	8-3/8"	STEVES
SANDHURST - 2 PANEL ROUND TOP PLANK	6/8	SMOOTH	18	OVOLO	4-3/8"	7"	9-7/8"	STEVES
SANDHURST - 2 PANEL ROUND TOP PLANK	7/0	SMOOTH	18	OVOLO	6-3/8"	7"	11-7/8"	STEVES
SANDHURST - 2 PANEL ROUND TOP PLANK	8/0	SMOOTH	18	OVOLO	4-3/8"	7"	9-7/8"	STEVES
CAMDALE - 2 PANEL ARCH TOP	6/8	TEXTURED	19	COVE & BEAD	5"	3-3/4"	9"	STEVES
CRAYBURN - 3 PANEL SQUARE TOP	6/8	SMOOTH	21	CRAFTSMAN	4-5/8"	---	8-15/16"	STEVES
CRAYBURN - 3 PANEL SQUARE TOP	7/0	SMOOTH	21	CRAFTSMAN	6-5/8"	---	10-15/16"	STEVES
CONMIVO - 5 PANEL SQUARE TOP	6/8	SMOOTH	22	STEP	6-1/2"	---	10-3/4"	STEVES
CONMIVO - 5 PANEL SQUARE TOP	7/0	SMOOTH	22	STEP	8-1/2"	---	12-3/4"	STEVES
ROCHELE - 5 PANEL SQUARE TOP	6/8	SMOOTH	23	COVE & BEAD	4-1/2"	---	8-1/2"	STEVES
ROCHELE - 5 PANEL SQUARE TOP	7/0	SMOOTH	23	COVE & BEAD	6-1/2"	---	10-1/2"	STEVES
ROCHELE - 5 PANEL SQUARE TOP	8/0	SMOOTH	23	COVE & BEAD	4-5/8"	---	10-1/8"	STEVES
COLBURN - 6 PANEL SQUARE TOP	6/8	SMOOTH	24	COVE & BEAD	4-1/8"	6-7/8"	8-1/4"	STEVES
COLBURN - 6 PANEL SQUARE TOP	7/0	SMOOTH	24	COVE & BEAD	6-1/8"	6-7/8"	10-1/4"	STEVES
COLBURN - 6 PANEL SQUARE TOP	8/0	SMOOTH	24	COVE & BEAD	5-1/16"	6-7/8"	8-7/16"	STEVES
COLBURN - 6 PANEL SQUARE TOP	6/8	TEXTURED	25	COVE & BEAD	4-1/4"	6-7/8"	8-1/4"	STEVES
COLBURN - 6 PANEL SQUARE TOP	7/0	TEXTURED	25	COVE & BEAD	6-1/4"	6-7/8"	10-1/4"	STEVES
COLBURN - 6 PANEL SQUARE TOP	8/0	TEXTURED	25	COVE & BEAD	4-1/4"	6-7/8"	8-1/4"	STEVES
LINCOLN PARK® - 1 PANEL FLAT	6/8	SMOOTH	32	CRAFTSMAN	4-1/4"	-	10-7/8"	MASONITE
LINCOLN PARK® - 1 PANEL FLAT	7/0	SMOOTH	32	CRAFTSMAN	6-1/4"	-	12-7/8"	MASONITE
LINCOLN PARK® - 1 PANEL FLAT	8/0	SMOOTH	32	CRAFTSMAN	4-1/4"	-	10-7/8"	MASONITE
LOGAN® - 2 PANEL FLAT	6/8	SMOOTH	33	CRAFTSMAN	4-1/4"	-	10-7/8"	MASONITE
LOGAN® - 2 PANEL FLAT	7/0	SMOOTH	33	CRAFTSMAN	6-1/4"	-	12-7/8"	MASONITE
WINSLOW® - 3 PANEL CRAFTSMAN FLAT	6/8	SMOOTH	34	CRAFTSMAN	4-1/4"	-	10-7/8"	MASONITE
BAYSHORE - 5 PANEL EQUAL FLAT	6/8	SMOOTH	35	CRAFTSMAN	4-1/4"	-	10-7/8"	MASONITE
CHEYENNE® - 2 PANEL ROUND TOP PLANK	6/8	SMOOTH	36	CHEYENNE	4-1/4"	7	8-3/8"	MASONITE
RIVERSIDE® - 5 PANEL SQUARE TOP	6/8	SMOOTH	37	RIVERSIDE	4-1/4"	-	8-3/8"	MASONITE

# Image Index

Images in this catalog may represent custom painted products.

PAGE	DOOR LAYOUT
COVER	MASONITE LOGAN®
2	MASONITE LOGAN®
4	MASONITE LOGAN®
4	STEVES FLUSH LAUAN

PAGE	DOOR LAYOUT
7	MASONITE LINCOLN PARK®
11	STEVES CRAYBURN
13	STEVES CAMBRIAN & COLBURN SMOOTH
20	STEVES CRAYBURN

PAGE	DOOR LAYOUT
26	MASONITE LOGAN®
29	MASONITE BAYSHORE
31	MASONITE LOGAN®
39	STEVES FLUSH PRIMED



## Primed Stile & Rail Doors

If you prefer a smooth surface for painting and a more authentic look.

Scan here to visit our Primed Stile & Rail Catalog online to view door styles.



## Interior Stile & Rail Doors

There is a unique warmth and sophistication that can only be found in real wood.

Scan here to visit our Interior Stile & Rail Catalog online to view door styles.

# Reeb® Learning Center

*A Learning Center for  
Everything Door Related*

## Short, Engaging Videos

Clear, visual guidance for features, and best practices.

## Guided Learning

Build a strong foundation or explore advanced topics with step-by-step learning.

## Product Education

Sharpen your sales skills with focused insights on Reeb's full product lineup.

## Manufacturer Videos

Gain insights directly from the source with featured videos from trusted manufacturers.



Start learning today at  
**learn.reeb.com**



Free Access



Mobile Friendly



24/7 Availability

**□ Bethlehem, PA**

1000 Maloney Cir.  
Bethlehem, PA 18015  
(800) 862-8622 voice  
(800) 772-7332 fax

**□ Barclay, MD**

1315 Goldsboro Rd.  
Barclay, MD 21607  
(800) 825-8331 voice  
(800) 331-9387 fax

**□ Mocksville, NC**

346 Bethel Church Rd.  
Mocksville, NC 27028  
(800) 642-0886 voice  
(800) 618-0620 fax

**□ Providence, RI**

19 Business Park Dr.  
Smithfield, RI 02917  
(800) 343-5703 voice  
(800) 388-5979 fax

**□ Syracuse, NY**

7475 Henry Clay Blvd.  
Liverpool, NY 13088  
(800) 422-5224 voice  
(800) 531-7332 fax



PART# REEBFM26

VERSION 1.0.0

For more information, visit [reeb.com](http://reeb.com).

COPYRIGHT © 2026 REEB® MILLWORK ALL RIGHTS RESERVED.