


BIG DOORS







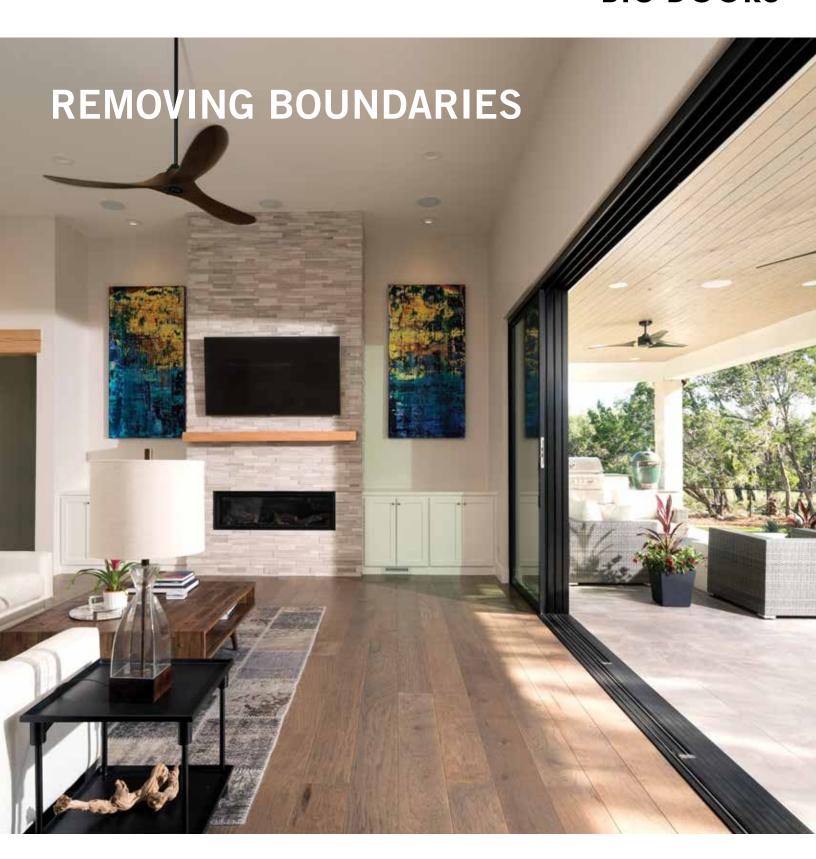

With Big Doors from Andersen, blur the lines between indoors and out and create spectacular spaces for relaxing, entertaining or just being.

The MultiGlide™ and Folding Outswing Doors, as part of the Architectural Collection, not only connect a home to the outdoors, they can be customized to fit any aesthetic from contemporary to traditional. These doors are engineered for smooth and easy operation, feature low-maintenance exteriors and are available in an array of style options and configurations to transform any space into something extraordinary.

Enjoy breathtaking views and instill a sense of open space with panels that hide in plain sight, flush sills that create a seamless transition and narrow profiles that maximize light.

And like all Andersen® products, they are supported by over 115 years of commitment to quality and service that can only come from one of the most trusted names in the industry.

Create distinction and bring your vision to life with Big Doors from Andersen. For more information, visit **andersenwindows.com/bigdoors**.

- 6 Features & Options
- 8 Exterior & Interior Options
- 9 Design Criteria
- 10 Styles & Sizing
- 10 Pocketing Sizing & Configurations
- 13 Stacking Sizing & Configurations
- 15 Door Details
- 33 Performance





FEATURES

MultiGlide doors are available as an expansive wall of glass or as a pass-through window for outdoor entertaining areas. They're available in stacking and pocketing configurations with one-directional or two-directional panel operation and built to fit openings between 4' 11 ½" (1502) and 50' (15240) wide and between 4' (1219) and 10' (3048) tall. Custom sizes available in ½" (3) increments.

Frame

♠ The frame is made of 6063-T6 extruded aluminum. Pultruded thermally controlled frame option for increased performance is available for clad wood panels only.

3 Continuous weatherstrip is designed to provide an effective air and water barrier, while enabling smooth operation.

• Frames paired with aluminum panels are available in eight popular options, including two anodized finishes. For doors with clad wood panels, interior jambs are available in wood species and finishes to match the panels. Standard exterior finish meets AAMA 2604. An optional finish that meets AAMA 2605 is available.

Built-in Jacking Screws



Built-in jacking screws make installation easier. Jacking screws positioned within side and head jambs serve as built-in shims enabling fine adjustments during installation. Precision adjustments enable frame and panels to interact as designed during initial installation and throughout the life of the product for smooth operation.

Sill


Two sill types are available: flush sill and on-floor drainage sill. Both sills are made of heavy-duty extruded 6005-T5 aluminum providing strength and rigidity.

Flush Sill

Flush sill is designed to project only $\frac{1}{16}$ " (5) above the finished floor, creating a seamless transition from inside to outside. Finish is clear anodized. Flush sill is not tested for water performance.



Material between rails shown to represent flooring

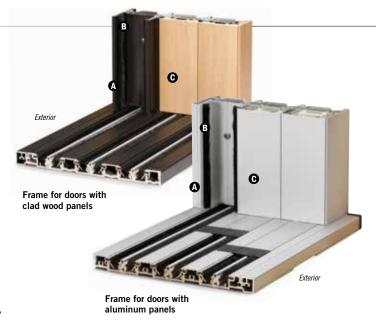

On-Floor Drainage Sill

The on-floor drainage sill is designed with built-in drainage channels, spaced out every 17" (432) to 24" (610) depending on overall width. Available in clear anodized or dark bronze anodized finishes.

Exterior and interior ramps for on-floor drainage sill are designed to assist in complying with sliding door threshold height requirements where mandated by the Federal Fair Housing Act (FFHA), Americans with Disabilities Act (ADA), and state and local building codes depending on final installation.** See page 15 for threshold and ramp options. Interior ramp cannot be used with optional raised threshold.



Exterior Ramp



Interior Ramn

An optional raised threshold for on-floor drainage sill enhances performance to PG30 rating on select sizes.†



Raised Threshold

Panels

For added design flexibility, contemporary panels are available in a sleek, aluminum option or an aluminum-clad wood option for warmth on the inside. Contemporary aluminum panels feature 2 ¾" (70) stiles and rails. Contemporary clad wood panels feature 2 ¾" (70) lock jamb stiles and rails with reinforcements at interlocks.

Traditional panels are available in aluminum-clad wood. Traditional clad wood panels feature 4 11 /16" (119) stiles and top rail with 4 11 /16" (119), 8" (203) or 12" (305) bottom rail heights.

Thermally controlled units use aluminumclad wood panels. Panel widths can be 28" (711) to 60" (1524).

Contemporary Panel 2¾" tails and stiles

Glass

Panels are silicone bed glazed and finished with an interior stop. Ovolo (colonial) or contemporary glass stops are available on clad wood panels. Contemporary glass stops are used on aluminum panels.

Glass spacer bars are available in stainless steel or optional black.

High-Performance glass options include:

Dual-pane:

- Low-E4® tempered glass
- Low-E4 HeatLock® tempered glass
- Low-E4 Sun tempered glass
- Low-E4 SmartSun[™] tempered glass
- Low-E4 SmartSun HeatLock tempered glass
- Low-E4 PassiveSun® tempered glass

Triple-pane for greater energy performance:

- Low-E4 tempered glass
- Low-E4 Enhanced tempered glass
- Low-E4 SmartSun tempered glass
- Low-E4 SmartSun Enhanced tempered glass

Additional glass options are available. Contact your Andersen supplier.

A removable translucent film helps shield the glass from damage during delivery and construction and simplifies finishing at the jobsite.

Hardware

Roller Wheels



Continuously adjustable synthetic roller wheels with stainless steel sealed ball-bearings provide smooth, quiet operation. Cycle tested 25,000 times for proven operation, the 1 5%" (41) contoured rollers perfectly match the track to reduce lateral vibrations and increase ease of operation.

Traditional Panel

8" bottom rail shown, 4 11/16" and 12" bottom rail also available

** Information about mandatory requirements for door threshold heights and other applicable accessibility requirements for doors under the FFHA and ADA can be found by visiting http://www.fairhousingfirst.org and http://www.ada.gov. † 191* (4851) x 95.5* (2426) MultiGlide door tested to Class LC-PG30. Specifiers and design professionals should also consult state and local building codes applicable to the building for any additional accessibility requirements.
Dimensions in parentheses are in millimeters.

^{*} Opening dimensions are rough openings.



Locking System

Sleek, low-profile hardware design allows panels to be stacked. Keyed and non-keyed options are available.



The MultiGlide[™] door has an adjustable two-point locking system providing intuitive adjustment. Equipped with laminated stainless steel hooks and an anti-slam device to prevent damage to the side jamb.

Packaging

Modular packaging design enables easier handling without the need for onsite equipment. Heaviest package designed for a minimum of four people. Smallest package weighs less than 100 lbs/45 kg.

Smart labeling provides quick inventory assessment, product identification, along with installation location designation.



HARDWARE Sold separately. Keyed and non-keyed options are available.



HARDWARE FINISHES



ACCESSORIES Sold separately.

Insect Screen

Rigid, heavy-duty extruded 6063-T6 aluminum-framed gliding insect screen, equipped with smooth synthetic rollers and premium flush hardware. Features 2 3/4" (70) even sight lines to maximize view. Longlasting fiberglass screen mesh with a charcoal finish comes standard. Frames are available in all exterior colors and finishes, and in singlepanel and multi-panel configurations.

Grilles

For contemporary aluminum panels, Finelight™ grilles-between-the-glass are available in %" (16) flat or 1" (25) contoured profiles.

For contemporary clad wood and traditional clad wood panels. grilles are available in ovolo and contemporary profiles in Full Divided Light and Simulated Divided Light styles in 1/8" (22), 1 1/8" (29) and 1 ½" (38) widths. Removable wood grilles and Finelight grilles-betweenthe-glass are also available.

Hardware

Handle Heights

For doors fitting rough openings between 5' 10" (1778) to 6'8" (2032). two handle locations are available. A standard handle height of 38" (965) from the bottom of the panel or a lower handle height of 18" (457) from the bottom of the panel.

For doors fitting rough openings between 4' (1219) to 5' 9 1/8" (1775), the standard handle height is 18" (457) from the bottom of the panel.

Exterior Keyed Lock



A five-pin exterior keyed lock is available for all MultiGlide doors. This lock allows the door to be locked and unlocked from the exterior.

Edge Pull



Premium spring return edge pull is optional on stacking configurations and standard on pocketing configurations to move lead panel out of the pocket. Finish is satin nickel.

Automated Open/Close System*





Adding optional automation on MultiGlide doors delivers the ultimate in ease of use. Doors can be opened or closed with the touch of a button, creating wide open spaces in the most convenient way.

- Automation is available on all stacking and pocketing door configurations
- Operate using an interior touchpad and weatherproof exterior secure keypad
- Includes safety features such as overhead motion sensors and obstruction detection
- Battery backup included to keep the system secure
- · Able to be connected to a home automation system
- Automation system meets UL325 Certification
- Installed by third-party certified installers at the iobsite
- · Backed by a 5-year limited warranty

ALUMINUM-CLAD WOOD DOOR EXTERIOR





ALUMINUM DOOR EXTERIOR & INTERIOR




- Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies.
 - ** Dark bronze and black also available on maple.
 † Anodized silver available on maple only.


Printing limitations prevent exact replication of colors and finishes. See your Andersen supplier for actual color and finish samples.



Aluminum Frame

Aluminum-clad panels shown. Aluminum panels also available.







Vertical Sections

Horizontal Section

Thermally Controlled Frame

Aluminum-clad panels shown, dark-colored area indicates pultruded components. Aluminum panels not available thermally controlled.





Vertical Sections

Horizontal Section

Design Criteria

For specific design, sizing and installation information, visit andersenwindows.com/multiglide.

To allow for proper performance and operation, verify the structural integrity of the header such that the maximum deflection with live and dead loads is calculated using the L/750 criteria and $^{1}/_{4}$ " (6) as a maximum. The lower surface of the header must be continuous and at a minimum $1\,^{1}/_{2}$ " (38) of thickness to allow for proper embedment of installation screws. The surface dimensions are defined in the specifications of the Site Preparation Information found by visiting andersenwindows.com/multiglide.

Special consideration should be taken in the case of a window set above the opening header.

An adequate structural header must be set between any window and the head of the MultiGlide^w door. No direct joining to the MultiGlide door is allowed.

For important installation information, see page 37.

Weight of Door

The MultiGlide door system is a bottom-bearing door system. When considering structural requirements for subfloor, the dead load is 100 lbs/ft or 149 kg/m. Deflection over the entire sill span cannot be greater than 1/s" (3).

Dead Loads

Dead loads MUST be applied to the structure prior to installation.

Live Loads

Live loads are dynamic and will vary per region, exposure, occupancy, etc. An engineer will design the structure around the door based on a worst-case or fully loaded (anticipated live and known dead load) condition. Live loads can be: snow, ice, water, wind, etc. Headers should be designed to accommodate a worst-case live load scenario.

Pocket Door Applications

For MultiGlide doors with pocket(s), it is best to frame the interior pocket wall after door installation or to leave off sheathing for ease of installation.

Automation

Stacking Configuration


For MultiGlide doors with either an on-floor or flush sill, a minimum of 12" (305) open stud bay must be directly adjacent to the rough opening end where the stationary panel is located for motor installation. For doors with two-direction panel operation, a minimum of 6" (152) open stud bay is required for the side opposite where the motor is located to accommodate the return pulley. The motor can be installed on either side for doors with two-direction panel operation. Installation of the motor requires additional wall depth. See horizontal details in the Site Preparation Information Guide by visiting **andersenwindows.com/multiglide**.

Pocketing Configuration

For MultiGlide doors with either an on-floor or flush sill, the pocket width must be increased by a minimum of 12" (305) to allow for motor installation. For doors with two-direction panel operation, the pocket width must be increased by a minimum of 6" (152) for the side opposite where the motor is located to accommodate the return pulley. The motor can be installed in either pocket for doors with two-direction panel operation. Installation of the motor requires additional pocket depth. See horizontal details in the Site Preparation Information Guide by visiting andersenwindows.com/multiglide.

Styles and Sizes

CUSTOM HEIGHTS (rough opening dimensions provided)

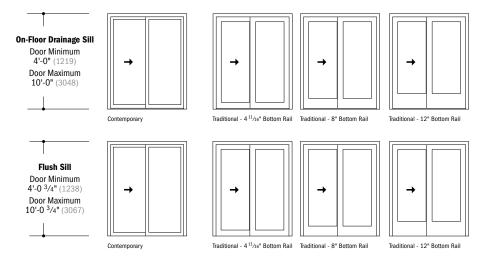



Custom sized in 1/8" (3) increments. Contact your Andersen supplier for additional dimensions and specifications.

Choose contemporary panels or one of three traditional style panels. Panel widths from 28" (711) to 60" (1524). For doors with on-floor drainage sill, panel heights are from 47 1/2" (1207) to 116 $^{1}/_{2}$ " (2959). For doors with flush sill, panel heights are from 47" (1194) to 117" (2972).

Note: For on-floor drainage sill, rough opening dimensions are from floor to header. For flush sill, dimensions are from $1^{1/2}$ " (38) below the finished floor to header. Shim space between the head jamb and rough opening is 1/2" (13). For flush sill, shim space below the sill is 1/4" (6).

Rough Opening Minimum to Maximum

5'-0¹/₄" (1530) to 10'-4¹/₈" (3153)

with pocket: $10'-4^{1}/2"$ (3162) to $21'-0^{3}/8"$ (6410)


POCKETING DOORS WITH TWO-DIRECTION PANEL OPERATION

JAMB DEPTHS*

Number of Panels & Handing	Without Insect Screen	Single- Panel Insect Screen	Multi- Panel Insect Screen
2-Panel, 1L-1R	2 ⁷ /8" (73)	5 ³ /8" (137)	n/a
4-Panel, 2L-2R	5 ³ /8"	7 ⁷ /8"	10 ³ /8"
	(137)	(200)	(264)
6-Panel, 3L-3R	7 ⁷ /8"	10 ³ /8"	1'-3 ³ /8"
	(200)	(264)	(391)
8-Panel, 4L-4R	10 ³ /8"	1'-0 ⁷ /8"	1'-8 ³ /8"
	(264)	(327)	(518)
10-Panel, 5L-5R	1'-0 ⁷ /8"	1'-2 ³ /8"	2'-1 ³ /8"
	(327)	(365)	(645)
12-Panel, 6L-6R	1'-2 ³ /8"	1'-4 ⁷ /8"	2'-6 ³ /8"
	(365)	(429)	(772)

*On-floor drainage sill extends 3/4" (19) to the exterior, optional exterior ramp extends 2 1/16" (52) to the exterior and optional interior sill ramp extends 1 3/8" (35) to the interior.

$\textbf{CUSTOM WIDTHS} \ (\text{rough opening dimensions provided})$



	CONTEMPORARY PANELS
Number of Panels & Handing	Rough Opening Minimum to Maximum
0 Decel 41 4B	5'-0 ¹ / ₄ " (1530) to 10'-4 ¹ / ₈ " (3153)
2-Panel, 1L-1R	with pocket: 10'-4 $^{1}\!/_{2}$ " (3162) to 21'-0 $^{3}\!/_{8}$ " (6410)
4-Panel, 2L-2R	9'-3 ⁷ /8" (2842) to 19'-10 ⁵ /8" (6061)
	with pocket: 14'-8 $^3/_4$ " (4489) to 30'-6 $^1/_4$ " (9303)
6-Panel, 3L-3R	13'-7 ¹ /2" (4153) to 29'-5 ¹ /8" (8969)
	with pocket: $19\ensuremath{^{\text{1}}\text{-}}0^{\text{1}}\ensuremath{^{\text{2}}}\ensuremath{^{\text{1}}}(5804)$ to $40\ensuremath{^{\text{1}}\text{-}}0^{\text{1}}\ensuremath{^{\text{2}}}\ensuremath{^{\text{1}}}(12205)$
8-Panel, 4L-4R	17'-11 ¹ /8" (5464) to 38'-11 ⁵ /8" (11877)
	with pocket: 23'-4 $^1\!/_4$ " (7118) to 40'-7" (12370)
10-Panel, 5L-5R	22'-2 $^3/_4"~(6776)~$ to $~40'\text{-}10^1/_8"~(12449)$
	with pocket: 27'-8" (8433) to 49'-11" (15215)
12-Panel. 6L-6R	26'-6 $^3/8"\ (8087)\ to\ 41'-11^7/8"\ (12798)$
12-Panel, 61-6K	with pocket: $31'-11^{1}/8"$ (9731) to $49'-11"$ (15215)

[·] Shim spa

l. 2L-2R	9'-3 ⁷ /8" (2842) to 19'-10 ⁵ /8" (6061)	4-Panel, 2L-2R		8'-11 ⁵ /8" (2734) to 19'-7 ¹ /2" (5982)
I, 2L-2K	with pocket: $14\mbox{'-}8\mbox{}^3\mbox{/_4"}\mbox{}(4489)$ to $30\mbox{'-}6\mbox{}^1\mbox{/_4"}\mbox{}(9303)$	4-Panei,	2L-2K	with pocket: 14'-4" (4369) to $30^{\prime}\text{-}3^{3}/\!_{4}$ " (9239)
l. 3L-3R	13'-7 ¹ /2" (4153) to 29'-5 ¹ /8" (8969)			12'-10 ⁷ /8" (3934) to 28'-10 ³ /4" (8807)
I, 3L-3K	with pocket: $19\mbox{'-}0^{1}\!/2\mbox{''}(5804)$ to $40\mbox{'-}0^{1}\!/2\mbox{''}(12205)$	6-Panel,	3L-3K	with pocket: $18'-3^{1/8}"$ (5566) to $39'-6^{7/8}"$ (12062)
l. 4L-4R	17'-11 ¹ /8" (5464) to 38'-11 ⁵ /8" (11877)		8-Panel, 4L-4R	16'-10 ¹ /4" (5137) to 38'-2 ¹ /8" (11636)
I, 4L-4K	with pocket: 23'-4 $^1\!/_4$ " (7118) to 40'-7" (12370)			with pocket: $22'-2^{1}/2"$ (6769) to $48'-10^{3}/8"$ (14894
el, 5L-5R	22'-2 ³ /4" (6776) to 40'-10 ¹ /8" (12449)	10-Panel.	EI ED	20'-9 ¹ / ₂ " (6337) to 40'-8" (12395)
51, 3L-3K	with pocket: $\mathbf{27'\text{-}8''}\ (8433)$ to $\mathbf{49'\text{-}11''}\ (15215)$	10-railei,	JL-JK	with pocket: $26'-1^3/4"$ (9855) to $49'-11^7/8"$ (15237)
el. 6L-6R	26'-63/8" (8087) to 41'-117/8" (12798)	12 Panal	61 6D	20'-9 ¹ /2" (6337) to 41'-9 ¹ /2" (12738)
	with pocket: 31'-11 $^1/\mathrm{8"}$ (9731) to 49'-11" (15215)	12-railei,	12-Panel, 6L-6R	with pocket: $25'-5^{7}/8"$ (7769) to $49'-11^{7}/8"$ (15237)
	en unit dimension and rough opening is 1/2" (13) on each side.			
iiea sizing	information, visit andersenwindows.com/multiglide or contact your	Angersen suppl	ier	

Number of Panels

& Handing


2-Panel. 1L-1R

[·] Dimensions in parentheses are in millimeters.



POCKETING DOORS WITH TWO-DIRECTION PANEL OPERATION (continued)


Configurations



Pocketing Doors with Two-Direction Panel Operation (Interior Stacking)

Pocketing doors with two-direction panel operation as viewed from the exterior. Doors stack to the interior. Number of panels and width dimensions vary based on panel style and configuration.* Flush sill and contemporary panels is shown. On-floor drainage sill and/or traditional panels also available. Details shown on pages 15-18.

POCKETING DOORS WITH TWO-DIRECTION PANEL OPERATION

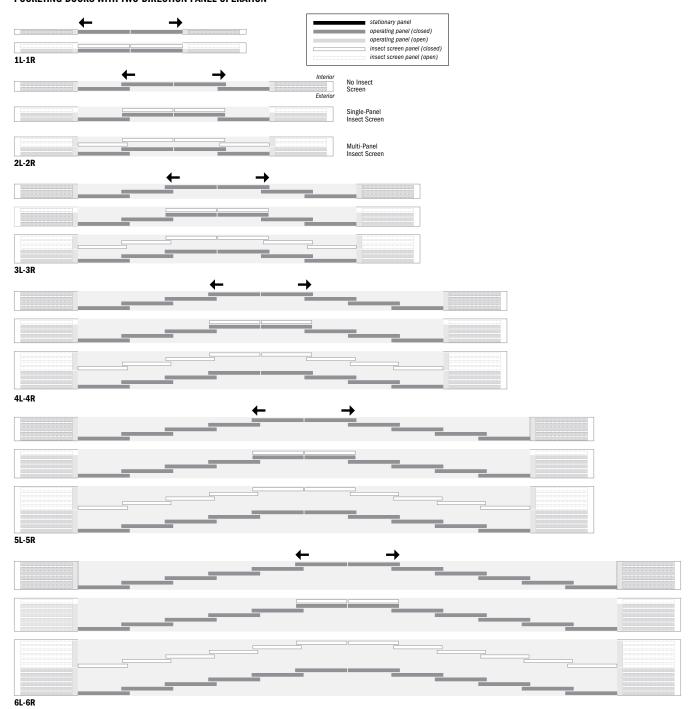


[•] Dimensions in parentheses are in millimeters.

^{*}Pocketing configurations are available with one insect screen per pocket, reducing jamb depth. Multi-panel insect screens are an option to screen the entire opening.

POCKETING DOORS WITH ONE-DIRECTION PANEL OPERATION*

Configurations



Pocketing Doors with One Direction Panel Operation (Interior Stacking)


Pocketing doors with one-direction operating panels (left or right) as viewed from the exterior. Doors stack to the interior. Number of panels and width dimensions vary based on panel style and configuration.† Flush sill and contemporary panels shown above. On-floor drainage sill and/or traditional panels also available. Details shown on page 15-18.

JAMB DEPTHS**

Number of Panels	Without	Single-Panel	Multi-Panel
& Handing	Insect Screen	Insect Screen	Insect Screen
1-Panel, 1L/1R	2 ⁷ /8" (73)	5 ³ /8" (137)	n/a
2-Panel, 2L/2R	5 ³ /8"	7 ⁷ /8"	10 ³ /8"
	(137)	(200)	(264)
3-Panel, 3L/3R	7 ⁷ /8"	10 ³ /8"	1'-3 ³ /8"
	(200)	(264)	(391)
4-Panel, 4L/4R	10 ³ /8"	1'-0 ⁷ /8"	1'-8 ³ /8"
	(264)	(327)	(518)
5-Panel, 5L/5R	1'-0 ⁷ /8"	1'-3 ³ /8"	2'-1 ³ /8"
	(327)	(391)	(645)
6-Panel, 6L/6R	1'-3 ³ /8"	1'-5 ⁷ /8"	2'-6 ³ /8"
	(391)	(454)	(772)

^{**}On-floor drainage sill extends 3/4" (19) to the exterior, optional exterior ramp extends 2 1/16" (52) to the exterior and optional interior sill ramp extends 13/8" (35) to the interior.

CUSTOM WIDTHS (rough opening dimensions provided)




	CONTEMPORARY PANELS
Number of Panels & Handing	Rough Opening Minimum to Maximum
1 Daniel 41 /4D	2'-8 ³ /8" (822) to 5'-4 ³ /8" (1635)
1-Panel, 1L/1R	with pocket: $5'-4^{1}/2"$ (1638) to $10'-8^{1}/2"$ (3264)
2 Danel 21 /2D	4'-10 ¹ /4" (1480) to 10'-1 ⁵ /8" (3089)
2-Panel, 2L/2R	with pocket: $7'-6^3/4"$ (2305) to $15'-5^3/4"$ (4718)
3-Panel, 3L/3R	7'-0" (2134) to 14'-10 ⁷ /8" (4543)
	with pocket: 9'-8 $^{1}\!/_{2}$ " (2959) to 20'-3" (6172)
4-Panel, 4L/4R	9'-1 ⁷ /8" (2791) to 19'-7 ⁷ /8" (5991)
4-ranci, 4L/ 4K	with pocket: 11'-10 $^{1}/_{2}$ " (3620) to 24'-11 $^{1}/_{2}$ " (7607)
5-Panel, 5L/5R	11'-3 $^{5}/8$ " (3445) to 24'-5 $^{3}/8$ " (7452)
	with pocket: 14'-0 $^1\!/\!_4$ " (4274) to 29'-9" (9068)
6-Panel, 6L/6R	13'-5 $^{1}/_{2}$ " (4102) to 29'-2 $^{5}/_{8}$ " (8906)
o-i andi, or / or	with pocket: $16\mbox{'-}2\mbox{ $^{1}/\!8"$}(4931)$ to $34\mbox{'-}6\mbox{ $^{1}/\!4"$}(10522)$

	TRADITIONAL PANELS
Number of Panels & Handing	Rough Opening Minimum to Maximum
1 Danal 41 /4D	2'-8 ³ /8" (822) to 5'-4 ³ /8" (1635)
1-Panel, 1L/1R	with pocket: $5'-4^{1}/2"$ (1638) to $10'-8^{1}/2"$ (3264)
2 Danel 21 /2D	4'-8 ¹ /8" (1426) to 10'-0" (3048)
2-Panel, 2L/2R	with pocket: $7'-4^3/8"$ (2245) to $15'-4^1/8"$ (4677)
3-Panel, 3L/3R	6'-7 ³ /4" (2026) to 14'-7 ⁵ /8" (4461)
	with pocket: 9'-4" (2845) to 19'-11 $^3\!/_4$ " (6090)
4-Panel, 4L/4R	8'-7 ³ /8" (2626) to 19'-3 ¹ /4" (5874)
4-rallel, 4L/ 4K	with pocket: 11'-3 $^1\!/_2$ " (3442) to 24'- $^3\!/_8$ " (7503)
5-Panel, 5L/5R	10'-7" (3226) to 23'-10 $^{7}/8$ " (7287)
	with pocket: 13'-3 $^{1}\!/8"$ (4042) to 29'-2 $^{7}\!/8"$ (8912)
6-Panel, 6L/6R	12'-6 3 /4" (3829) to 28'-6 5 /8" (8703)
o ranol, oc / or	with pocket: 15'-2 $^{7}\!/8"$ (4645) to 33'-10 $^{3}\!/4"$ (10331)

- ullet Shim space between unit dimension and rough opening is $^{1}\!/_{2}$ " (13) on each side.
- For detailed sizing information, visit andersenwindows.com/multiglide or contact your Andersen supplier.

POCKETING DOORS WITH ONE-DIRECTION PANEL OPERATION

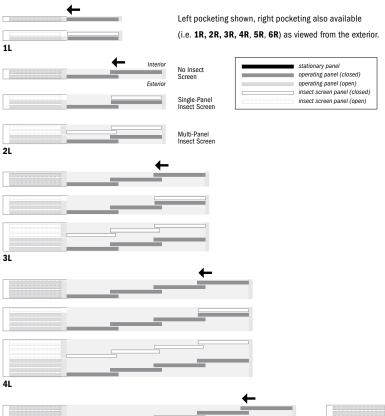

			←
	 _		
	 _	_	
51	 		

⁶L

[•] Dimensions in parentheses are in millimeters. *See your Andersen supplier for availability.

[†]Pocketing configurations default to one insect screen per pocket, reducing jamb depth. Multi-panel insect screens are an option to fill the entire opening.



INTERIOR STACKING DOORS WITH TWO-DIRECTION PANEL OPERATION

Configurations

		+	+	+	+	+	→	→	→	→	→	
--	--	---	---	---	---	---	----------	----------	----------	----------	----------	--

Interior Stacking Doors with Two-Direction Panel Operation

Interior stacking doors with two-direction panel operation as viewed from the exterior. Number of panels and width dimensions vary based on panel style and configuration. Flush sill and contemporary panels shown above.

On-floor drainage sill and/or traditional panels also available. Details shown on page 15 and pages 19-21.

JAMB DEPTHS*

Number of Panels & Handing	Without Insect Screen	Single-Panel Insect Screen	Multi-Panel Insect Screen
4-Panel, S1L-1RS	5 ³ /8" (137)	n/a	7 ⁷ /8" (200)
6-Panel, S2L-2RS	7 ⁷ /8" (200)	n/a	1'-0 ⁷ /8" (327)
8-Panel, S3L-3RS	10 ³ /8" (264)	n/a	1'-5 ⁷ /8" (454)
10-Panel, S4L-4RS	1'-0 ⁷ /8" (327)	n/a	1'-10 ⁷ /8" (581)
12-Panel, S5L-5RS	1'-2 ³ /8" (365)	n/a	1'-5 ⁷ /8" (454)

^{*}On-floor drainage sill extends 3/4" (19) to the exterior, optional exterior ramp extends $2^{1}/_{16}$ " (52) to the exterior and optional interior sill ramp extends $1^3/_6$ " (35) to the interior.


CUSTOM WIDTHS (rough opening dimensions provided)

С	CONTEMPORARY PANELS					
Number of Panels & Handing	Rough Opening Minimum to Maximum					
4-Panel, S1L-1RS	9'-5 ⁵ /8" (2886) to 20'-0 ³ /8" (6106)					
6-Panel, S2L-2RS	13'-9 $^{1}/_{4}$ " (4197) to 29'-6 $^{7}/_{8}$ " (9014)					
8-Panel, S3L-3RS	18'-0 $^{7}/8$ " (5509) to 39'-1 $^{3}/8$ " (11922)					
10-Panel, S4L-4RS	22'-4 ¹ /2" (6820) to 48'-7 ⁷ /8" (14830)					
12-Panel, S5L-5RS	26'-8 ¹ /8" (8131) to 50'-0" (15240)					

TRADITIONAL PANELS					
Number of Panels & Handing	Rough Opening Minimum to Maximum				
4-Panel, S1L-1RS	9'-1 ³ /8" (2778) to 19'-9 ¹ /4" (6026)				
6-Panel, S2L-2RS	13'-0 5 /8" (3978) to 29'-0 1 /2" (8852)				
8-Panel, S3L-3RS	17'-0" (5182) to 38'-37/8" (11681)				
10-Panel, S4L-4RS	20'-11 ¹ /4" (6382) to 47'-7 ¹ /8" (14278)				
12-Panel, S5L-5RS	24'-10 ⁵ /8" (7585) to 50'-0" (15240)				

- \bullet Shim space between unit dimension and rough opening is $^{1}\!/_{2}$ " (13) on each side.
- For detailed sizing information, visit andersenwindows.com/multiglide or contact your Andersen supplier.


INTERIOR STACKING DOOR WITH TWO-DIRECTION PANEL OPERATION

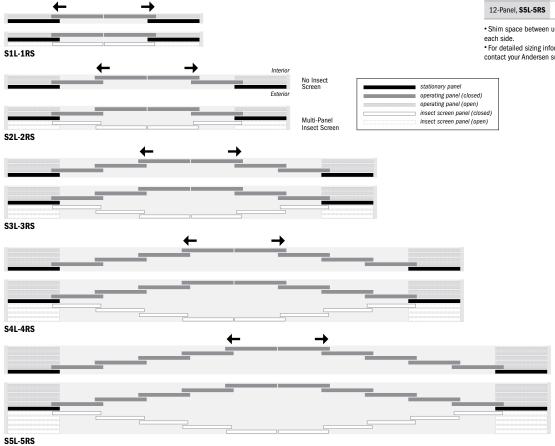


[•] Dimensions in parentheses are in millimeters.

INTERIOR OR EXTERIOR STACKING DOOR WITH ONE-DIRECTION PANEL OPERATION

Configurations



Interior Stacking One-Directional (R)



Exterior Stacking One-Directional (R)

Choose interior or exterior† stacking door with one-direction (left or right) panel operation as viewed from the exterior. Number of panels and width dimensions vary based on panel style and configuration. Flush sill and contemporary panels shown above. On-floor drainage sill and/or traditional panels also available.

Details shown on page 15 and pages 19-21.

JAMB DEPTHS*

Number of Panels	Without	Single-Panel	Multi-Panel
& Handing	Insect Screen	Insect Screen**	Insect Screen**
2-Panel, S1L/1RS	5 ³ /8"	7 ⁷ /8"	7 ⁷ /8"
	(137)	(200)	(200)
3-Panel, S2L/2RS	7 ⁷ /8"	10 ³ /8"	1'-0 ⁷ /8"
	(200)	(264)	(327)
4-Panel, S3L/3RS	10 ³ /8"	1'-0 ⁷ /8"	1'-5 ⁷ /8"
	(264)	(327)	(454)
5-Panel, S4L/4RS	1'-0 ⁷ /8"	1'-3 ³ /8"	1'-10 ⁷ /8"
	(327)	(391)	(581)
6-Panel, S5L/5RS	1'-3 ³ /8"	1'-5 ⁷ /8"	2'-3 ⁷ /8"
	(391)	(454)	(708)

^{*}On-floor drainage sill extends 3/4" (19) to the exterior, optional exterior ramp extends $2\,^1/_{16}$ " (52) to the exterior and optional interior sill ramp extends $1\,^3/_6$ " (35) to the interior.


CUSTOM WIDTHS (rough opening dimensions provided)

С	CONTEMPORARY PANELS				
Number of Panels & Handing	Rough Opening Minimum to Maximum				
2-Panel, S1L/1RS	4'-11 ¹ /8" (1502) to 10'-2 ¹ /2" (3112)				
3-Panel, S2L/2RS	7'-0.7/8" (2156) to $14'-11.3/4"$ (4566)				
4-Panel, S3L/3RS	9'-2 ³ /4" (2813) to 19'-9" (6020)				
5-Panel, S4L/4RS	11'-4 ¹ /2" (3467) to 24'-6 ¹ /4" (7474)				
6-Panel, S5L/5RS	13'-6 ³ /8" (4124) to 29'-3 ¹ /2" (8928)				


TRADITIONAL PANELS						
Number of Panels & Handing	Rough Opening Minimum to Maximum					
2-Panel, S1L/1RS	4'-9" (1448) to 10'-07/8" (3070)					
3-Panel, S2L/2RS	6'-8 ⁵ /8" (2048) to 14'-8 ¹ /2" (4483)					
4-Panel, S3L/3RS	8'-8 ¹ /4" (2648) to 19'-4 ¹ /8" (5896)					
5-Panel, S4L/4RS	10'-7 ⁷ /8" (3248) to 23'-11 ³ /4" (7309)					
6-Panel, S5L/5RS	12'-7 ⁵ /8" (3851) to 28'-7 ¹ /2" (8725)					

- \bullet Shim space between unit dimension and rough opening is $^1\!/\!z^n$ (13) on each side.
- For detailed sizing information, visit andersenwindows.com/multiglide or contact your Andersen supplier.

INTERIOR STACKING DOORS WITH ONE-DIRECTION PANEL OPERATION

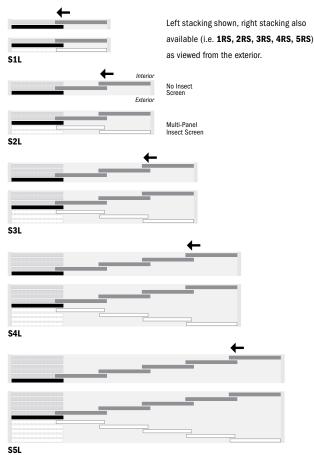

EXTERIOR STACKING† DOORS WITH ONE-DIRECTION PANEL OPERATION

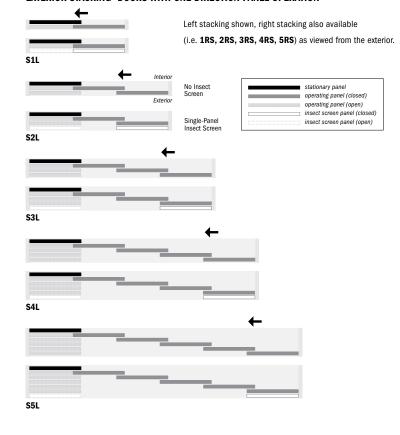

^{**}Single-panel insect screen is not available for interior stacking doors.


Multi-panel insect screen is not available for exterior stacking doors.

[·] Dimensions in parentheses are in millimeters.


[†]Exterior stacking option allows for the use of only one exterior insect screen on a multi-panel door, reducing jamb depth. Not tested for water performance.




Sill Details



Optional Exterior Sill Ramp



On-Floor Drainage Sill Optional Interior Sill Ramp




On-Floor Drainage Sill Optional Raised Threshold

Vertical Sections

Panel Details




Contemporary Aluminum Panel




Contemporary Clad Wood Panel



Traditional Clad Wood Panel 4 11/16" (119) Bottom Rail



Traditional Clad Wood Panel 8" (203) Bottom Rail




12" (305) Bottom Rail



Panel

Vertical Sections

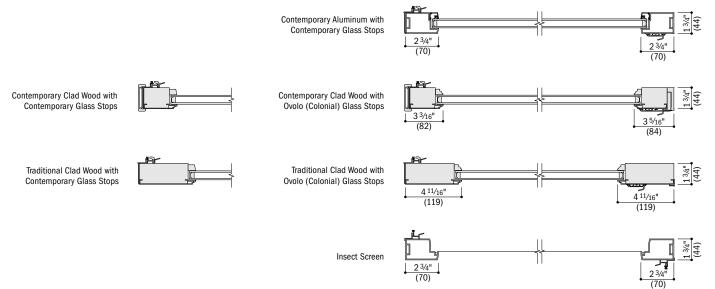


Horizontal Sections

Intermediate Panels

[•] Dimensions in parentheses are in millimeters.

Pocketing, Contemporary Aluminum Panels without Insect Screens

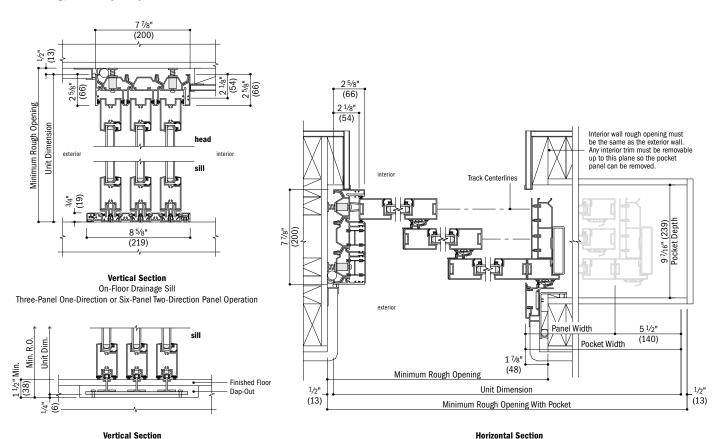

Flush Sill Three-Panel, One-Direction or Six-Panel, Two-Direction Panel Operation

Interior wall rough opening must be the same as the exterior wall. Any interior trim must be removable up to this plane so the pocket panel can be removed. Track Centerlines 9 7/16" (239) Pocket Depth Panel Width (140) Pocket Width 1 7/8" (48)Minimum Rough Opening **Unit Dimension** 1/21 1/2" (13)(13)Minimum Rough Opening With Pocket

Three-Panel, One-Direction Panel Operation

Horizontal Section


Six-Panel, Two-Direction Panel Operation

- \bullet 7 $^{7}/8"$ (200) jamb depth measurement is from front side of door frame to back side of door frame.
- Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.
 Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
- Dimensions in parentheses are in millimeters.
- Contemporary clad wood or traditional clad wood panel details are also available.




14⁴.

Pocketing, Contemporary Aluminum Panels with Single-Panel Insect Screen

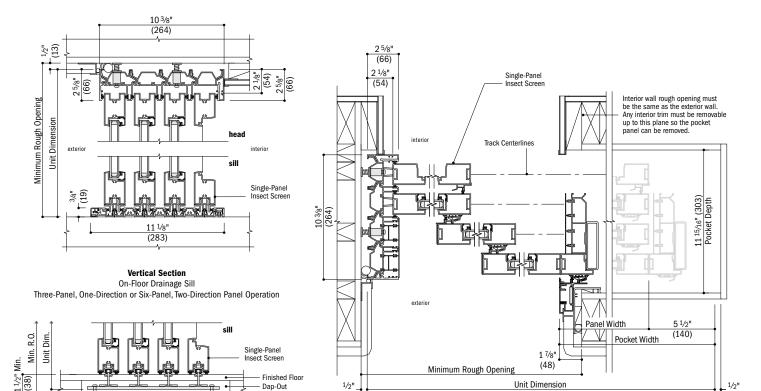

Vertical Section Flush Sill Horizontal Section
Three-Panel, One-Direction Panel Operation

Minimum Rough Opening With Pocket

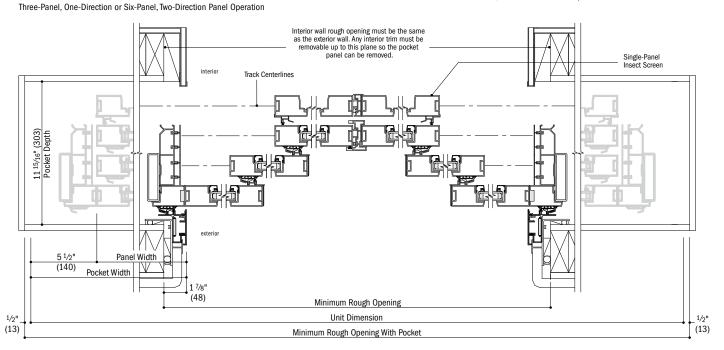


(13)


Horizontal Section

Six-Panel, Two-Direction Panel Operation

- 10 3/s" (264) (this page) and 1'-3 3/s" (391) (next page) jamb depth measurements are from front side of door frame to back side of door frame.
- *Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.
- Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
- Dimensions in parentheses are in millimeters.
- Contemporary clad wood or traditional clad wood panel details are also available.


(13)

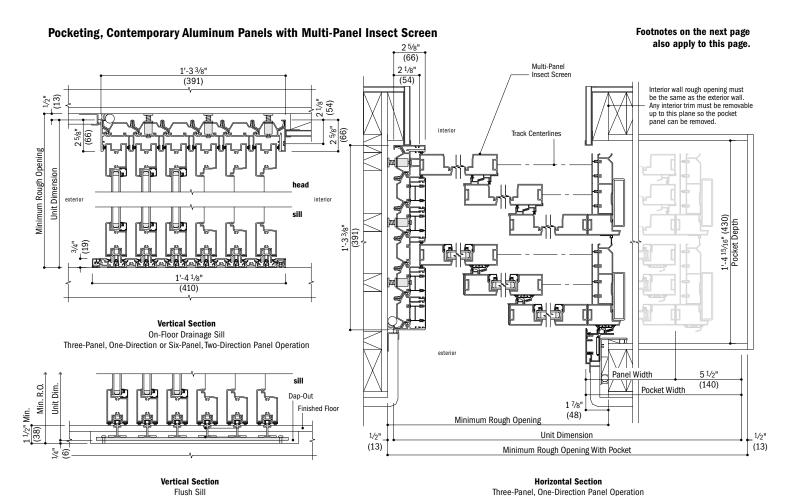

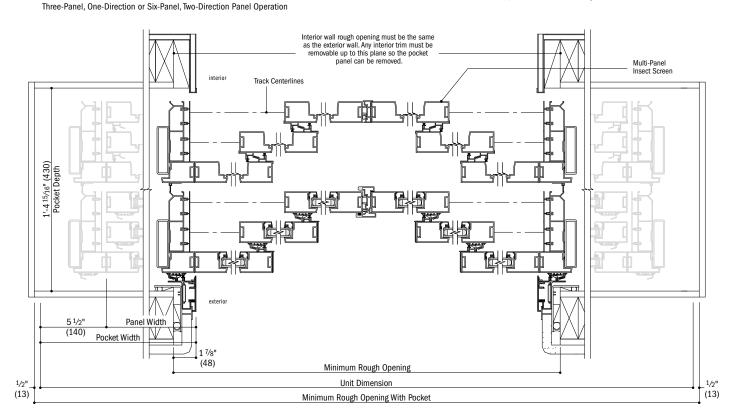





Interior Stacking, Contemporary Aluminum Panels without Insect Screens




Vertical Section On-Floor Drainage Sill
Three-Panel, One-Direction Panel Operation



Vertical Section Flush Sill Three-Panel, One-Direction Panel Operation



Horizontal Section Three-Panel, One-Direction Panel Operation

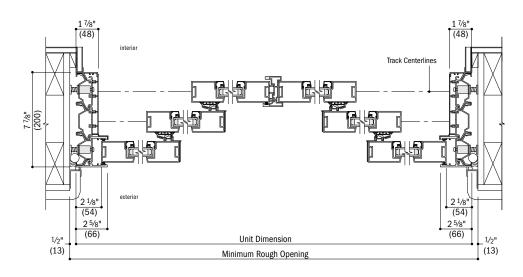


Horizontal Section

Six-Panel, Two-Direction Panel Operation


- 7 $^{7}/\epsilon$ " (200) jamb depth measurement is from front side of door frame to back side of door frame.
- Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.
- Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
 Dimensions in parentheses are in millimeters.
- Contemporary clad wood or traditional clad wood panel details are also available.

Interior Stacking, Contemporary Aluminum Panels with Multi-Panel Insect Screen

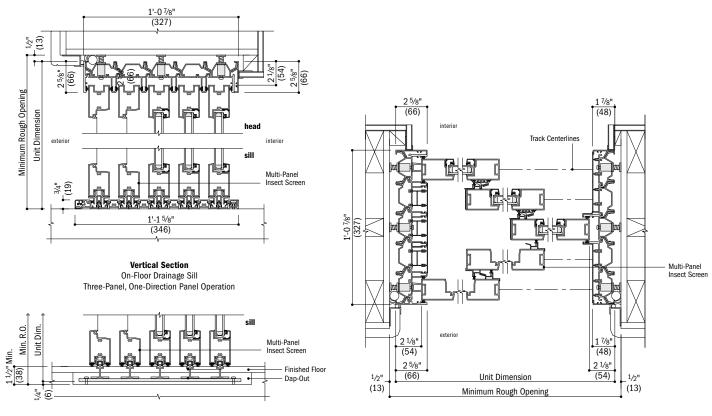

Vertical Section Flush Sill Three-Panel, One-Direction Panel Operation

Horizontal Section Three-Panel, One-Direction Panel Operation

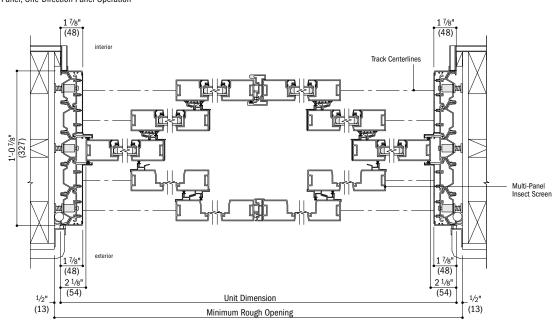


Horizontal Section


Six-Panel, Two-Direction Panel Operation

- 1'-0 7/8" (327) jamb depth measurement is from front side of door frame to back side of door frame.
- *Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.
- Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
 Dimensions in parentheses are in millimeters.
- Contemporary clad wood or traditional clad wood panel details are also available.



Exterior Stacking, Contemporary Aluminum Panels without Insect Screens






Vertical Section

Flush Sill

Three-Panel, One-Direction Panel Operation


Vertical Section On-Floor Drainage Sill Three-Panel, One-Direction Panel Operation

Exterior Stacking, Contemporary Aluminum Panels with Single-Panel Insect Screen



Vertical Section


On-Floor Drainage Sill Three-Panel, One-Direction Panel Operation



Vertical Section


Flush Sill

Three-Panel, One-Direction Panel Operation



Horizontal Section

Three-Panel, One-Direction Panel Operation

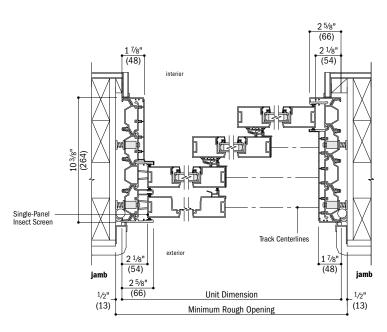

Horizontal Section

Three-Panel, One-Direction Panel Operation

- 7 7/8" (200) jamb depth measurement is from front side of door frame to back side of door frame.
- Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.

 Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
- · Dimensions in parentheses are in millimeters.
- Contemporary clad wood or traditional clad wood panel details are also available.

FOLDING OUTSWING DOORS

- 24 Features & Options
- 26 Exterior & Interior Options
- 27 Design Criteria
- 27 Styles & Sizing
- 28 Configurations
- 29 Door Details
- 33 Performance





FOLDING OUTSWING DOORS

FEATURES

When closed, these folding outswing doors create a stately wall of light. When open, they transform a room into a gateway to the world outside. With standard or custom panel designs, they fit openings between 3' 3" (991) to 48' (14630) wide and between 3' 5"/8" (1051) to 10' (3048) in height. Doors can be built to open from the left, right or center and can be used as pass-through windows for outdoor entertaining areas.

Frame

- Heavy-duty extruded aluminum cladding protects the exterior from the elements. Both frame and panels are available with wood exteriors as a special product request.
- The engineered wood frame members are treated with a water-repellent wood preservative for long-lasting* protection and performance.

Sill


Three sill options are available:

- The on-floor drainage sill offers a PG 40 rating for sizes up to 24' (7315) wide and 8' (2438) and PG 30 rating for sizes up to 24' (7315) wide and 10' (3048) tall, and is available in painted gray or dark bronze.
- The flush sill option places the track even with the finished floor.
- **(3)** The on-floor low-threshold sill option provides easy accessibility. Available in painted gray or dark bronze.

On-Floor Drainage Sill



Flush Sill



On-Floor Low-Threshold Sill





High-Profile Sill Stop

For better security against water infiltration an optional 2⁷/₈" high-profile sill stop is available (water penetration resistance test pressure 7.5 psf). See page 27 for detail.


Panel

The aluminum-clad panel has a dual weatherstrip design at the bottom and along the panel edges, providing a weathertight seal. Available in a contemporary style with $3^{11}/_{16}$ " (94) equal stiles and rails. A traditional style with $4^{11}/_{16}$ " (119) stiles and top rail with three bottom rail heights of $4^{11}/_{16}$ " (119), 8^{**} (203) and 12^{**} (305).



Custom Panel Examples

Rectangular panels are available with virtually any design.** See your Andersen supplier for details.



Exterior Finish

The aluminum exterior frame and clad panels feature a durable, low-maintenance AAMA 2605 finish.

Glass

Panels are silicone bed glazed and finished with an interior stop. Ovolo (colonial) or contemporary glass stops are available on clad wood panels.

Glass spacer bars are available in stainless steel or optional black.

High-Performance glass options include:

Dual-pane:

- Low-E4® tempered glass
- Low-E4 HeatLock® tempered glass
- Low-E4 Sun tempered glass
- Low-E4 SmartSun[™] tempered glass
- Low-E4 SmartSun HeatLock tempered glass
- Low-E4 PassiveSun® tempered glass

Triple-pane for greater energy performance:

- Low-E4 tempered glass
- Low-E4 Enhanced tempered glass
- Low-E4 SmartSun tempered glass
- Low-E4 SmartSun Enhanced tempered glass

Additional glass options are available. Contact your Andersen supplier.

A removable translucent film helps shield the glass from damage during delivery and construction and also simplifies finishing at the jobsite.

Hardware

Multi-Point Locking System



The folding outswing door has a multipoint locking system with a hook bolt above and below the center deadbolt along with flush bolts on the panels that lock into the head and sill. This system provides a weathertight seal and enhanced security. The flush bolts and pull handles are available in a matte black or satin stainless steel finish.

Concealed Shoot Bolt



Concealed shoot bolt hardware is standard on doors with contemporary panels. Available in brushed stainless steel or bronzed stainless steel finishes.

Flush Shoot Bolt



Flush shoot bolt hardware is standard on doors with traditional panels. Available in matte black or satin stainless steel finishes.

Pull Handle



A pull handle is available on doors with both contemporary and traditional style panels. Available in matte black or satin stainless steel finishes.

^{*} Visit andersenwindows.com/warranty for details.

** Custom panels utilize a different product design that includes the use of a proud glazing bead.

Dimensions in parentheses are in millimeters.



HARDWARE Sold separately.



YUMA®
Distressed Bronze
Distressed Nickel



ENCINO®

Distressed Bronze
Distressed Nickel



ANVERS[®]
Bright Brass
Oil Rubbed Bronze
Satin Nickel



NEWBURY®

Antique Brass
Bright Brass
Brushed Chrome
Oil Rubbed Bronze
Polished Chrome

Satin Nickel



COVINGTON™

Antique Brass

Bright Brass

Oil Rubbed Bronze

Chrome

Nickel



Antique Brass
Bright Brass
Oil Rubbed Bronze
Satin Nickel



ALBANY

Black

Gold Dust

Stone

White



Stone White

Bold name denotes finish shown.



FSB® HARDWARE OPTIONS





ACCESSORIES Sold separately.

Frame

Extension Jambs

Base jamb depth is $6\,\%_{16}$ " (167). Interior extension jambs are available in $\%_{16}$ " (1.5) increments between $5\,\%_{16}$ " (129) and 12" (305).

Exterior Trim

Aluminum Brick Mould

Aluminum brick mould is optional for clad doors. See page 27 for details.

Aluminum Frame Extender

An optional aluminum frame extender to assist with retro-fitting new door units into existing openings. See page 27 for details.

Insect Screens

Retractable insect screens are available. Contact your Andersen supplier for details.

Grilles

Full Divided Light and Simulated Divided Light styles in ½" (22), 1½" (29) and 1½" (38) widths. Removable wood grilles and Finelight™ grilles-between-the-glass are also available.

Distressed bronze and oil rubbed bronze are "living" finishes that will change with time and use.

Bright brass and satin nickel finishes feature a 10-year limited warranty.

Tribeca and Albany hardware are zinc diecast with powder-coated durable finish. Other hardware is solid forged brass.

Mix and match interior and exterior style and finish options are available, excludes FSB hardware.

Printing limitations prevent exact replication of finishes.

See your Andersen supplier for actual finish samples.

Dimensions in parentheses are in millimeters.

"FSB" is a registered trademark of Franz Schneider Brakel GmbH & Co.

FOLDING OUTSWING DOORS

ALUMINUM-CLAD WOOD DOOR EXTERIOR Custom colors available.



INTERIOR

WOOD SPECIES



Bean

Bronze'

Green

Naturally occurring variations in grain, color and texture of wood make each door one of a kind. All wood interiors are unfinished unless a painted option is specified.

Silver

Bark

Grass

^{*} Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies.

^{**} Dark bronze and black also available on maple.

[†] Anodized silver available on maple only.

Printing limitations prevent exact duplication of finishes. See your Andersen supplier for actual finish samples.



Design Criteria

To allow for proper performance and operation, verify the structural integrity of the header such that the maximum deflection with live and dead loads is limited to the lesser of L/750 of the span and $\frac{1}{4}$ " (6). The maximum weight per panel with Low-E4®, SmartSun™ or Sun glass is 250 pounds or 113 kg. Weights using alternate glazings will need to be provided by Andersen. For important installation information, see page 37.


Construction

Standard construction of the folding outswing door is an aluminum clad exterior with a rich wood interior. Clad folding door details are shown, wood exterior doors are also available. For more information, visit andersenwindows.com/foldingdoors.

Styles and Sizes

Scale 1/8" (3) = 1'-0" (305) - 1:96

Contemporary Panel Sizes



CUSTOM WIDTHS


Number of Panels	Minimum to Maximum				
2-Panel	3'-2 1/4" (972) to 8'-2 1/4" (2496)				
3-Panel	4'-8 5/8" (1438) to 12'-2 1/4" (3715)				
4-Panel	6'-3 ⁷ / ₈ " (1927) to 16'-2 ⁵ / ₈ " (4943)				
5-Panel	7'-9" (2362) to 20'-2 5/8" (6163)				
6-Panel	9'-4 1/8" (2848) to 24'-2 7/8" (7388)				

	imber Panels	Minimum to Maximum				
7-	Panel	10'-9 1/4" (3283) to 28'-2 7/8" (8607)				
8-	Panel	12'-4 1/2" (3772) to 32'-3 1/4" (9836)				
9-	Panel	13'-9 ⁵ / ₈ " (4207) to 36'-3 ¹ / ₂ " (11062)				
10-	Panel	15'-4 ³ / ₄ " (4693) to 40'-3 ⁷ / ₈ " (12290)				
11-	Panel	16'-9 ⁷ / ₈ " (5128) to 44'-3 ³ / ₄ " (13506)				

of Panels $18'-5 \frac{1}{8}"$ (5617) to 48'-0" (14630) 12-Panel 13-Panel 19'-10 $\frac{1}{4}$ " (6052) to 48'-0" (14630) 14-Panel 21'-5 $^{3}/_{8}$ " (6537) to 48'-0" (14630) 15-Panel 22'-10 $\frac{1}{2}$ " (6972) to 48'-0" (14630) 16-Panel 24'-4 $^{7}/_{8}$ " (7439) to 48'-0" (14630)

Number

High-Profile Sill Stop Detail



On-Floor Drainage Sill with Optional **High-Profile Sill Stop**

Brick Mould 13/8" (34) 4 7/8" (123)B

Head Jamb with Optional

Installation Accessory Details

13/4" (44)

(51)

Head Jamb with Optional Frame Expander

Custom sized in 1/8" (3) increments. Contact your Andersen supplier for additional dimensions and specifications.

iladicional l'alici 31203	
CUSTOM REIGHTS	



CUSTOM WIDTHS Number


of Panels

2-Panel 3-Panel

4-Panel

5-Panel

Traditional Panel Sizes



Minimum to Maximum


 $3'-2^{1}/_{4}"$ (972) to $6'-8^{1}/_{8}"$ (2035)

4'-8 5/8" (1438) to 9'-11 1/4" (3029) 6'-3 ⁷/₈" (1927) to 13'-2 ¹/₄" (4020)

7'-9" (2362) to 16'-5 5/8" (5020)

9'-9 1/8" (2975) to 19'-8 3/4" (6013)





Number of Panels	Minimum to Maximum				
7-Panel	10'-9 1/4" (3283) to 22'-11 7/8" (7007)				
8-Panel	12'-4 1/2" (3772) to 26'-3 1/8" (8004)				
9-Panel	13'-9 ⁵ / ₈ " (4207) to 29'-6 ¹ / ₂ " (9004)				
10-Panel	15'-4 ³ / ₄ " (4693) to 32'-9 ⁷ / ₈ " (10004)				
11-Panel	16'-9 ⁷ / ₈ " (5128) to 36'-0 ³ / ₄ " (10992)				

Number of Panels	Minimum to Maximum
12-Panel	18'-5 1/8" (5617) to 39'-4 1/8" (11992)
13-Panel	19'-10 1/4" (6052) to 42'-7 1/8" (12983)
14-Panel	21'-5 3/8" (6537) to 45'-10 1/2" (13983)
15-Panel	22'-10 1/4" (6966) to 48'-0" (14630)
16-Panel	24'-4 ⁷ / ₈ " (7439) to 48'-0" (14630)

Minimum to Maximum


^{. &}quot;Minimum to Maximum" door width dimensions refers to frame-to-frame dimension

[·] Dimensions in parentheses are in millimeters.

FOLDING OUTSWING DOORS

Panel Configurations


Configurations are designated from left to right as viewed from the exterior.

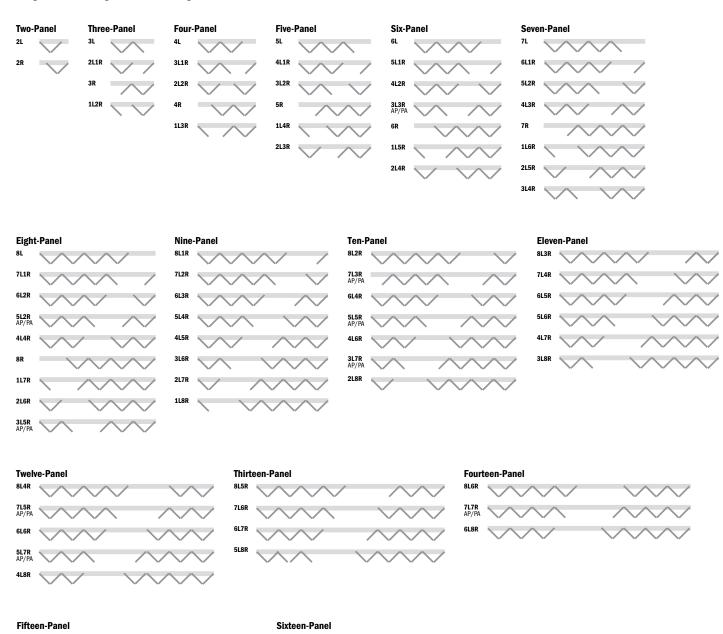




Folding Doors - Contemporary Panel Details

Scale $1^{1}/_{2}$ " (38) = 1'-0" (305) - 1:8




Contemporary Panel with Contemporary Glass Stop




Contemporary Panel with Ovolo (Colonial) Glass Stop

- \bullet 6 $^9/_{16}$ " (167) jamb depth measurement is from back side of installation flange to inside edge of door frame.
- Light-colored areas are included with the door unit. Dark-colored areas are additional Andersen* parts required to complete door assembly as shown and must be specified.
- assembly as shown and must be specified.


 Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 27
- page 37.
 Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
- Dimensions in parentheses are in millimeters
- Clad folding door details are shown. Wood exterior folding doors are also available.

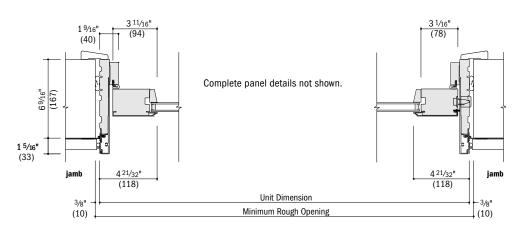


Horizontal Section

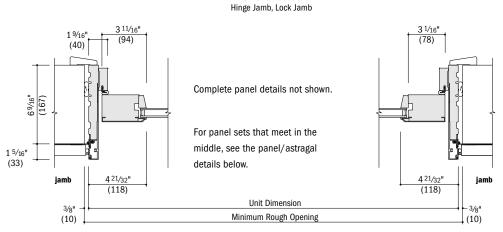


Horizontal Section Hinge Jamb, Hinge Jamb




Horizontal Section Astragal, Lead Panel-Lead Panel



Horizontal Section Astragal, Passive Panel-Active Panel



Horizontal Section Astragal, Lead Panel-Active Panel



Horizontal Section Hinge Panels

Lead Panel-Lead Panel astragals are used for doors with two-direction panel operation and an even-even number of panels. Example: **4L4R**



Lead Panel-Active Panel astragals are used for doors with two-direction panel operation and an even-odd number of panels. Example: **4L3R**




Passive Panel-Active Panel or Active Panel-Passive Panel astragals are used for doors with two-direction panel operation and an odd-odd number of panels. Example: 5L3R



FOLDING OUTSWING DOORS

Folding Doors - Contemporary Panel Details

Scale $1^{1}/_{2}$ " (38) = 1'-0" (305) - 1:8

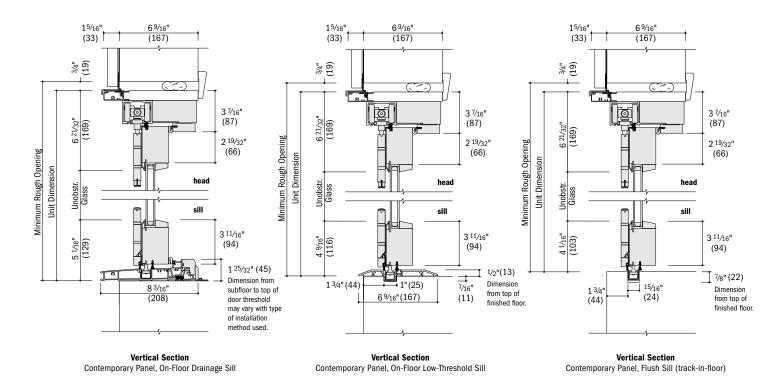

^{• 6} 9 /1e" (167) jamb depth measurement is from back side of installation flange to inside edge of door frame.
• Light-colored areas are included with the door unit. Dark-colored areas are additional Andersen® parts required to complete door assembly as shown and must be specified.

^{*}Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.


[•] Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
• Dimensions in parentheses are in millimeters.

[•] Clad folding door details are shown. Wood exterior folding doors are also available.




Folding Doors - Traditional Panel Details

Scale $1^{1/2}$ " (38) = 1'-0" (305) - 1:8




Traditional Panel with Contemporary Glass Stop

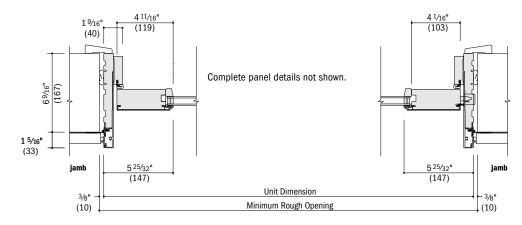


Horizontal Section

Hinge Jamb, Lock Jamb


- $^{\bullet}$ 6 $^{9}/_{16}$ " (167) jamb depth measurement is from back side of installation flange to inside edge of door frame.
- Light-colored areas are included with the door unit. Dark-colored areas are additional Andersen* parts required to complete door assembly as shown and must be specified.
- assembly as shown and must be specified.
 Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.
- Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
- Dimensions in parentheses are in millimeters
- Clad folding door details are shown. Wood exterior folding doors are also available.

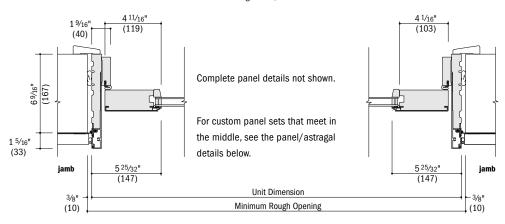


Horizontal Section Hinge Jamb, Hinge Jamb




Horizontal Section Astragal, Lead Panel-Lead Panel



Horizontal Section Astragal, Passive Panel-Active Panel



Horizontal Section Astragal, Lead Panel-Active Panel



Horizontal Section Hinge Panels

Lead Panel-Lead Panel astragals are used for doors with two-direction panel operation and an even-even number of panels. Example: **4L4R**



Lead Panel-Active Panel astragals are used for doors with two-direction panel operation and an even-odd number of panels. Example: **4L3R**



Passive Panel-Active Panel or Active Panel-Passive Panel


astragals are used for doors with two-direction panel operation and an odd-odd number of panels. Example: **5L3R**




FOLDING OUTSWING DOORS

Folding Doors - Traditional Panel Details

Scale $1^{1/2}$ " (38) = 1'-0" (305) - 1:8

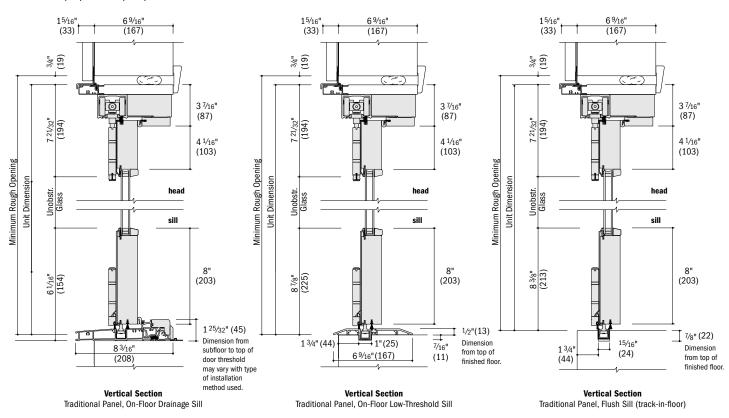

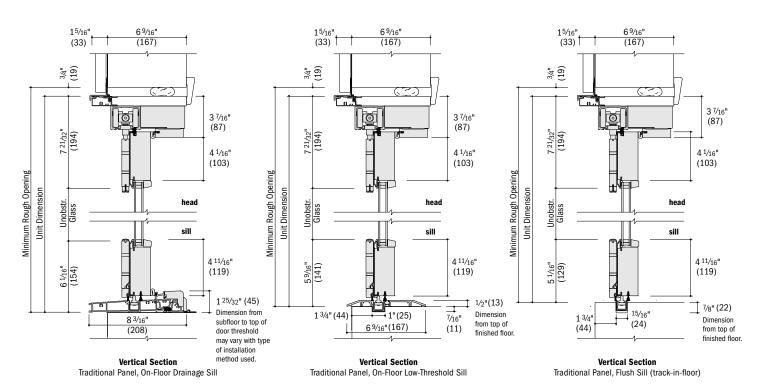

- ullet 6 $^{9}/_{16}$ " (167) jamb depth measurement is from back side of installation flange to inside edge of door frame.
- Light-colored areas are included with the door unit. Dark-colored areas are additional Andersen® parts required to complete door assembly as shown and must be specified.

 Rough openings may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items. See installation information on page 37.
- Details are for illustration only and are not intended to represent complete or appropriate product installation methods or materials for application. Refer to product installation guide.
- Dimensions in parentheses are in millimeters.
 Clad folding door details are shown. Wood exterior folding doors are also available.
- Traditional panel with 12" (305) bottom rail, not shown, are also available.



PERFORMANCE STANDARDS

The Window and Door Manufacturers Association (WDMA), the American Architectural Manufacturers Association (AAMA) and the Canadian Standards Association (CSA) jointly release the North American Fenestration Standard/Specification for Windows, Doors and Skylights (NAFS-11) where "-11" refers to the most recent publication year of 2011. NAFS is also referred to as AAMA/WDMA/CSA 101/I.S.2/A440, which is how the International Code Council (ICC) lists this standard in the 2012 and 2015 International Residential Code (IRC) and International Building Code (IBC) as the means to indicate the window, door or skylights design pressure rating used to determine compliance to the jobsite design pressure requirements.

A product only achieves a "Performance Grade" or "PG" rating when it complies with all of the NAFS performance requirements such as ease of operation, air infiltration resistance, resistance to water penetration and resistance to forced entry, etc. A "Design Pressure Rating" or "DP" rating only depicts the design and structural load performance.

Performance Classes

The NAFS Standard/Specification defines requirements for four performance classes. Performance classes are designated R, LC, CW, and AW. This classification system provides for several levels of performance. Product selection is always based on the performance and building code requirements of the particular project.

Elements of Performance Grade (PG) Designations

In order to qualify for a given performance grade (PG), test specimens need to pass all required performance tests for the following, in addition to all required auxiliary (durability) and applicable material/component tests (not shown here) for the applicable product type and desired performance class:

- (a) Operating force (if applicable): Maximum operating force varies by product type and performance class.
- **(b) Air leakage resistance:** Tested in accordance with ASTM E283 at a test pressure of 1.57 psf. Allowable air infiltration for R, LC and CW class designations is 0.3 cubic feet per minute per square foot of frame (cfm/ft²).
- (c) Water penetration resistance: Tested in accordance with ASTM E547 with the specified test pressure applied per NAFS-11. Test consists of four cycles. Each cycle consists of five minutes with pressure applied and one minute with the pressure released, during which the water spray is continuously applied. Water spray shall be uniformly applied at a constant rate of 5 U.S. gal/ft 2 · hr.
- (d) Uniform load deflection test: Tested in accordance with ASTM E330 for both positive and negative pressure (pressure defined by NAFS-11) with the load maintained for a period of 10 seconds. The test specimen shall be evaluated for deflection during each load for permanent damage after each load and for any effects on the normal operation of the specimen. Starting with the 2008 version of NAFS, design pressure (DP) will only represent the "uniform load deflection test".
- **(e) Uniform load structural test:** Tested in accordance with ASTM E330 for both positive and negative pressure (pressure defined by NAFS-11) with the load maintained for a period of 10 seconds. After loads are removed, there shall be no permanent deformation in excess of 0.4% of its span and no damage to the unit, which would make it inoperable.
- **(f) Forced-entry resistance (if applicable):** Tested in accordance with ASTM F588 (windows), F476 (swinging doors) and F842 (sliding doors) at a performance level 10 rating.

Performance Grades (PG) & Corresponding Test Pressures (psf)

Cla Perfo	rmance ass/ rmance rade		Itration ressure	Allowa Infiltr	imum ible Air ation/ ion Rate	Resista	netration nce Test sure	Design	Pressure		ıral Test ssure
R	LC	Pa	psf	L/s·m²	cfm/ft²	Pa	psf	Pa	psf	Pa	psf
15	-	75	1.57	1.5	0.30	140	2.92	720	15.04	1080	22.56
20	-	75	1.57	1.5	0.30	150	3.13	960	20.05	1440	30.08
25	25	75	1.57	1.5	0.30	180	3.76	1200	25.06	1800	37.59
30	30	75	1.57	1.5	0.30	220	4.59	1440	30.08	2160	45.11
35	35	75	1.57	1.5	0.30	260	5.43	1680	35.09	2520	52.63
40	40	75	1.57	1.5	0.30	290	6.06	1920	40.10	2880	60.15
45	45	75	1.57	1.5	0.30	330	6.89	2160	45.11	3240	67.67
50	50	75	1.57	1.5	0.30	360	7.52	2400	50.13	3600	75.19
55	55	75	1.57	1.5	0.30	400	8.35	2640	55.14	3960	82.71
60	60	75	1.57	1.5	0.30	440	9.19	2880	60.15	4320	90.23
65	65	75	1.57	1.5	0.30	470	9.82	3120	65.16	4680	97.74
70	70	75	1.57	1.5	0.30	510	10.65	3360	70.18	5040	105.26
75	75	75	1.57	1.5	0.30	540	11.28	3600	75.19	5400	112.78
80	80	75	1.57	1.5	0.30	580	12.11	3840	80.20	5760	120.30
85	85	75	1.57	1.5	0.30	580	12.11	4080	85.21	6120	127.82
90	90	75	1.57	1.5	0.30	580	12.11	4320	90.23	6480	135.34
95	95	75	1.57	1.5	0.30	580	12.11	4560	95.24	6840	142.86
100	100	75	1.57	1.5	0.30	580	12.11	4800	100.25	7200	150.38

HALLMARK CERTIFICATION

The Window and Door Manufacturers Association (WDMA)-sponsored Hallmark Certification Program provides manufacturers with certification to the AAMA/WDMA/CSA 101/I.S.2/A440-11 Standard and is designed to provide builders, architects, specifiers and consumers with an easily recognizable means of identifying products that have been manufactured and tested in accordance with NAFS (AAMA/WDMA/CSA 101/I.S.2/A440) industry standards and other applicable performance standards. Conformance is determined by periodic in-plant inspections by a third-party administrator. Inspections include auditing licensee quality control procedures and processes and a review to confirm products are manufactured in accordance with the appropriate performance standards. Periodic testing of representative product constructions and components by an independent testing laboratory is also required. When all of the program requirements are met, the licensee is authorized to use the WDMA Hallmark registered logo on their certification label as a means of identifying products and their performance ratings.

Products successfully obtaining Hallmark Certification will be labeled with a three-part code, which includes performance class, performance grade and size tested. In addition to this mandatory requirement, you are allowed to list the design pressure on a separate line.

WINDOW & DOOR WANNEACTURERS ASSOCIATION WDMA Hallmark Certified www.wdma.com	Andersen Corporation MULTIGLIDE DOOR Manufacturer stipulates certification as indicated below.
STANDARD	RATING
AAMA/WDMA/CSA 101/I.S.2/A440-11	Class LC ⁽¹⁾ – PG30 ⁽²⁾ – Size Tested 178.8 x 96.0 in. ⁽³⁾ DP+40/-40 ⁽⁴⁾
AAMA/WDMA/CSA 101/I.S.2/A440-08	Class LC ⁽¹⁾ – PG30 ⁽²⁾ – Size Tested 178.8 x 96.0 in. ⁽³⁾ DP+40/-40 ⁽⁴⁾

- (1) Performance Class
- (2) Performance Grade
- (3) Size Tested
- (4) Design Pressure

In the example above, the performance class is LC, the performance grade (PG) is 30 pounds per square foot (psf) and the size tested is 178.8" x 96.0". What this means to the specifier is, based on the performance grade chart, the laboratory-tested air infiltration was less than 0.3 cfm/ft² (test pressure is always 1.57 psf and the allowable airflow is 0.3 cfm/ft²), the product tested successfully resisted a laboratory water penetration test at a test pressure of 3.0 psf, the product tested successfully withstood a laboratory positive test pressure of 30 psf and a laboratory negative test pressure of 30 psf and the product tested passed the laboratory requirements for operational force and forced-entry resistance. Based on this test, all products of the same design that are smaller than the tested size can be labeled with this product performance rating.

IMPORTANT

Building codes prescribe design pressure based on a variety of criteria (i.e. windspeed zone, building height, building type, jobsite exposure, etc.). Design pressures derived from Performance Grade (PG) test requirements should be used to determine compliance to building code required design pressures. Structural test pressures, which are tested at 1.5 times the design pressure, should not be used for determining design pressure code compliance. In the example above, a PG 30 performance grade rating, which passes a 30 psf design pressure, should be used for determining code compliance, not the structural test pressure of 30 psf.

If you need further details about how Andersen® products perform to this standard, contact your Andersen supplier.

If you need further information about the AAMA/WDMA/CSA 101/I.S.2/A440-11 standard or the Hallmark Certification Program, please contact: WDMA, 330 N. Wabash Avenue Suite 2000, Chicago, IL 60611. Phone: 312-673-4828 Web: wdma.com

Where designated, Andersen products are tested, certified and labeled to the requirements of the Hallmark Certification Program. Actual performance may vary based on variations in manufacturing, shipping, installation, environmental conditions and conditions of use.

PRODUCT PERFORMANCE

Performance Grade and Air Infiltration Ratings

For current performance information, please visit andersenwindows.com.

Andersen® Product	Panel Type	Frame Type	Sill Type	AAMA/WDMA/CSA 101/IS2/A440-08 and -11 Performance Grade (PG)	+/- Corresponding Design Pressure (DP)	Air Infiltration CFM/FT ²	Water Test Pressure SPF
MultiGlide™ Doors							
S1L-1RS*	Traditional Clad	Non-Thermal	On-Floor Drainage**	Class LC-PG30 Size Tested 191.0" x 95.5"	30/30	0.19	4.5
S2L*	Contemporary Clad	Non-Thermal	On-Floor Drainage**	Class LC-PG30 Size Tested 178.8" x 95.5"	30/30	0.19	4.5
S2L*	Contemporary Clad	Thermal Controlled	On-Floor Drainage**	Class LC-PG30 Size Tested 178.8" x 95.5"	40/40	0.20	4.5
3R*	Contemporary Clad	Thermal Controlled	On-Floor Drainage**	Class LC-PG30 Size Tested 191.0" x 119.5"	30/30	0.16	4.5
3R*	Contemporary Aluminum	Non-Thermal	On-Floor Drainage**	Class LC-PG20 Size Tested 191.0" x 119.5"	20/20	0.16	4.5
Folding Outswing Doors							
3L1R†	Contemporary	Thermal Controlled	Standard	Class LC-PG30 Size Tested 159.8" x 119.5"††	30/30	0.08	7.5 ‡
3L1R†	Contemporary	Thermal Controlled	Standard	Class LC-PG40 Size Tested 159.8" x 95.5"#	40/40	0.08	7.5 ‡
1L3R†	Traditional	Thermal Controlled	Standard	Class LC-PG40 Size Tested 159.8" x 95.5"#	40/40	0.06	6.0
2L2R	Traditional	Thermal Controlled	Standard	Class LC-PG40 Size Tested 159.8" x 95.5"††	40/40	0.05	6.0
1L3R†	Traditional	Thermal Controlled	Standard	Class LC-PG30 Size Tested 159.8" x 119.5"tt	30/30	0.06	4.5
2L2R	Traditional	Thermal Controlled	Standard	Class LC-PG30 Size Tested 159.8" x 119.5" ^{††}	30/30	0.05	4.5

- "Performance Grade (PG)" ratings may vary from tested performance rating for larger or smaller units of a particular type. Some units may not be rated.
- This data is accurate as of June 2019. Due to ongoing product changes, updated test results or new industry standards, this data may change over time
- Where designated, Andersen® products are certified and labeled to the requirements of the Hallmark Certification Program. Actual performance may vary based on variations in manufacturing, shipping, installation, environmental conditions and conditions of use.
- · Contact your Andersen supplier for more information.
- *Values are for interior stacking doors. Contact your Andersen supplier for availability of exterior stacking door values.
- **Optional raised threshold for on-floor drainage sill must be used for performance ratings
- †Tested with standard multi-point hardware.
- ††Actual door size tested; certification maximum door size 288" (7315mm) x 119 ½" (3035mm).
- ‡Tested with optional high profile sill stop. Test value without optional high profile sill stop is 6.0 P.S.F.

Sound Transmission Ratings

For current performance information, please visit **andersenwindows.com**.

Andersen* Product	Sound Transmission Class (STC)	Outdoor/Indoor Transmission Class (OITC)
MultiGlide™ Doors		
S1L-1RS	29	24
S2L	29	24
S2L	29	24
3R	29	24
3R	29	24
Folding Outswing Doors		
3L1R	30	24
3L1R	30	24
1L3R	30	24
2L2R	30	24
1L3R	30	24
2L2R	30	24

- "Sound Transmission Class (STC)" & "Outdoor/Indoor Transmission Class (OITC)" ratings are for individual units based on independent tests and represent entire unit.
- This data is accurate as of June 2019. Due to ongoing product changes, updated test results or new industry standards, this data may change over time.

Center of Glass Performance Data

For current performance information, please visit andersenwindows.com.

					Fading		%RH	
Glass Type	VT¹	SC ²	SHGC ³	RHG ⁴	Tuv ⁵	Tdw ⁶	@ center ⁷	IGST ⁸
MultiGlide" Doors								
Low-E4® Dual-Pane Tempered	72%	0.48	0.41	98.2	16%	33%	60.9%	55.7°F
Low-E4 Sun Dual-Pane Tempered	40%	0.29	0.25	61.1	16%	24%	60.3%	55.4°F
Low-E4 SmartSun™ Dual-Pane Tempered	65%	0.31	0.27	65.6	5%	21%	61.8%	56.1°F
Low-E4 Triple-Pane Tempered	66%	0.44	0.38	91.6	14%	30%	64.3%	57.2°F
Low-E4 SmartSun Triple-Pane Tempered	59%	0.29	0.26	62.0	4%	19%	64.8%	57.4°F
Folding Outswing Doors								
Low-E4® Dual-Pane Tempered	72%	0.48	0.41	310	16%	33%	61%	56°F
Low-E4 Sun Dual-Pane Tempered	40%	0.29	0.25	193	16%	24%	59%	55°F
Low-E4 SmartSun™ Dual-Pane Tempered	65%	0.31	0.27	207	5%	21%	61%	56°F
Low-E4 Triple-Pane Tempered	66%	0.44	0.38	91.6	14%	30%	64.3%	57.2°F
Low-E4 SmartSun Triple-Pane Tempered	59%	0.29	0.26	62.0	4%	19%	64.8%	57.4°F

- "Low-E4*", "Low-E4* SmartSun™" and "Low-E4* Sun" are Andersen trademarks for "Low-E" glass.
- Based on NFRC testing/simulation conditions using Windows v7.3.4.0 and NFRC validated spectral data. 0°F outside temperature, 70°F inside temperature and a 15 mph wind.

1) Visible Transmittance (VT) measures how much light comes through the glass. The higher the value, from 0 to 1, the more daylight the glass lets in. Visible Transmittance is measured over the 380 to 760 nanometer portion of the solar spectrum. 2) Shading Coefficient defines the amount of heat gain through the glass compared to a single light of clear ¹/₈" (3 mm) glass. 3) Solar Heat Gain Coefficient (SHGC) defines the fraction of solar radiation admitted through the glass both directly transmitted and absorbed and subsequently released inward. The lower the value, the less heat is transmitted through the glass. 4) Relative Heat Gain is the amount of heat gain through a glazing incorporating U-Factor and Solar Heat Gain Coefficient. 5) Transmission Ultra-Violet Energy (TUV). The transmission of short-wave energy in the 300-380 nanometer portion of the solar spectrum. The energy can cause fabric fading. 6) Transmission Damage Function (TDW). The transmission of UV and visible light energy in the 300-600 nanometer portion of the solar spectrum. The value includes both the UV and visible light energy that can cause fabric fading. This rating has also been referred to as the Krochmann Damage Function. This rating better predicts fading potential than UV transmission alone. The lower the Damage Function rating, the less transmission of short-wave energy through the glass that can potentially cause fabric fading. Fabric type is also a key component of fading potential. 7) Percent relative humidity before condensation occurs at the center of glass, taken using center of glass temperature. 8) Inside glass surface temperatures are taken at the center of glass.

- This data is accurate as of June 2019. Due to ongoing product changes, updated test results or new industry standards, this data may change over time.
 Contact your Andersen supplier for current performance information or upgrade options.
 Contact your Andersen supplier or visit andersenwindows.com/nfrc for center of glass performance data on windows with laminated glass, patterned
- Contact your Andersen supplier or visit andersenwindows.com/nfrc for center of glass performance data on windows with laminated glass, patterned glass, tempered glass and products ordered with capillary breather tubes.



Andersen® NFRC Certified Total Unit Performance — Dual-Pane Glass

For current performance information, please visit andersenwindows.com.

Andersen® Product High-Performance Tempered Glass Type U-Factor1 SHGC² VT3 Without Grilles 0.30 0.27 0.46 E4° Simulated Divided Light Grilles 0.30 0.24 0.40 Low-0.32 0.24 0.40 Finelight™ Grilles 0.32 0.24 Full Divided Light Grilles 0.40 0.27 Low-E4 w/HeatLock* Without Grilles 0.27 0.45 Simulated Divided Light Grilles 0.27 0.23 0.39 Finelight Grilles 0.28 0.23 0.39 Full Divided Light Grilles 0.30 0.23 0.39 Without Grilles 0.17 Simulated Divided Light Grilles 0.31 0.15 0.22 MultiGlide™ Door Finelight Grilles 0.32 0.15 0.22 On-Floor Sill, Thermally Full Divided Light Grilles 0.32 0.15 0.22 Controlled Frame Traditional Clad Wood Panel Without Grilles 0.30 0.18 0.42 Low-E4 SmartSun™ Simulated Divided Light Grilles 0.30 0.16 0.36 Finelight Grilles 0.31 0.16 0.36 Full Divided Light Grilles 0.32 0.16 0.36 Without Grilles 0.26 0.18 0.41 Low-E4 SmartSun v/HeatLock Simulated Divided Light Grilles 0.26 0.16 0.35 0.28 0.35 Finelight Grilles 0.16 Full Divided Light Grilles 0.29 0.16 0.35 Low-E4 PassiveSun* Without Grilles 0.31 0.45 0.51 Simulated Divided Light Grilles 0.31 0.39 0.44 Finelight Grilles 0.32 0.39 0.44 Full Divided Light Grilles 0.33 0.39 0.28 0.46 Without Grilles 0.40 ΕŢ Simulated Divided Light Grilles 0.40 0.25 0.40 Low-Finelight™ Grilles 0.42 0.25 0.40 Full Divided Light Grilles 0.42 0.25 0.40 Low-E4 w/HeatLock* Without Grilles 0.37 0.27 0.45 Simulated Divided Light Grilles 0.37 0.24 0.39 Finelight Grilles 0.38 0.24 0.39 Full Divided Light Grilles 0.40 0.24 0.39 Without Grilles 0.41 0.18 0.26 Simulated Divided Light Grilles 0.41 0.16 0.22 MultiGlide™ Door Finelight Grilles 0.42 0.16 0.22 Flush Sill, Non Thermally Full Divided Light Grilles 0.42 0.16 0.22 Controlled Frame, Traditional Clad Wood Panel 0.40 0.19 0.42 Without Grilles Low-E4 SmartSun" AND-N-158 Simulated Divided Light Grilles 0.40 0.17 0.36 0.41 0.36 Finelight Grilles 0.17 0.42 0.36 Full Divided Light Grilles 0.17 Low-E4 SmartSun w/HeatLock Without Grilles 0.36 0.19 0.41 Simulated Divided Light Grilles 0.36 0.16 0.35 Finelight Grilles 0.38 0.16 0.35 Full Divided Light Grilles 0.39 0.16 0.35 Without Grilles 0.41 0.45 0.51 Low-E4 PassiveSun* Simulated Divided Light Grilles 0.40 0.41 0.44 0.40 Finelight Grilles 0.42 0.44 Full Divided Light Grilles 0.43 0.40 0.44 Without Grilles 0.30 0.31 0.54 Low-E4® Simulated Divided Light Grilles 0.30 0.28 0.47 Finelight™ Grilles 0.30 0.28 0.47 Full Divided Light Grilles 0.32 0.28 0.47 Low-E4 w/HeatLock* Without Grilles 0.26 0.31 0.52 Simulated Divided Light Grilles 0.26 0.27 0.46 Finelight Grilles 0.26 0.27 0.46 Full Divided Light Grilles 0.29 0.27 0.46 Without Grilles 0.31 0.19 0.30 Simulated Divided Light Grilles 0.31 0.17 MultiGlide™ Door Finelight Grilles 0.31 0.17 0.26 On-Floor Sill, Thermally Full Divided Light Grilles 0.32 0.17 0.26 Controlled Frame, Contempora Without Grilles 0.30 0.21 0.48 Clad Wood Panel Low-E4 SmartSun" Simulated Divided Light Grilles 0.30 0.19 0.42 AND-N-156 Finelight Grilles 0.30 0.19 0.42 Full Divided Light Grilles 0.32 0.19 0.42 Without Grilles 0.26 0.20 0.47 Low-E4 SmartSun v/HeatLock Simulated Divided Light Grilles 0.26 0.18 0.41 Finelight Grilles 0.26 0.18 0.41 Full Divided Light Grilles 0.29 0.18 0.41 Without Grilles 0.31 0.52 0.59 Low-E4 PassiveSun* Simulated Divided Light Grilles 0.31 0.45 0.51 0.32 0.39 0.44 Finelight Grilles Full Divided Light Grilles 0.33 0.45 0.51

Refer to notes on page 37 for important information on performance data.

Andersen° Product	High-Perf	ormance Tempered Glass Type	U-Factor ¹	SHGC ²	VT ³
		Without Grilles	0.41	0.32	0.54
	Low-E4	Simulated Divided Light Grilles	0.41	0.28	0.47
	Low	Finelight™ Grilles	0.41	0.28	0.47
		Full Divided Light Grilles	0.43	0.28	0.47
	Low-E4 w/HeatLock*	Without Grilles	0.37	0.31	0.52
	v-E4	Simulated Divided Light Grilles	0.37	0.28	0.46
	일본	Finelight Grilles	0.37	0.28	0.46
	≥`	Full Divided Light Grilles	0.40	0.28	0.46
	4	Without Grilles	0.41	0.20	0.30
MultiGlide™ Door	Low-E4 Sun	Simulated Divided Light Grilles	0.41	0.18	0.26
On-Floor Sill, Non-Thermally	9"	Finelight Grilles	0.41	0.18	0.26
Controlled Frame, Contemporary		Full Divided Light Grilles	0.43	0.18	0.26
Clad Wood Panel AND-N-158	4: nu	Without Grilles	0.40	0.21	0.48
7110 N 100	artS	Simulated Divided Light Grilles Finelight Grilles	0.40	0.19	0.42
	Low-E4 SmartSun"	Full Divided Light Grilles	0.40	0.19	0.42
		Without Grilles	0.42	0.19	0.47
	Low-E4 SmartSun w/HeatLock	Simulated Divided Light Grilles	0.36	0.19	0.41
	ow-E nart leat	Finelight Grilles	0.36	0.19	0.41
	_S [™]	Full Divided Light Grilles	0.39	0.19	0.41
	•_	Without Grilles	0.33	0.13	0.59
	E4 Sun	Simulated Divided Light Grilles	0.41	0.46	0.51
	Low-E4 PassiveSun*	Finelight Grilles	0.41	0.46	0.51
	Pas	Full Divided Light Grilles	0.43	0.46	0.51
		Without Grilles	0.56	0.33	0.54
	E4*	Simulated Divided Light Grilles	0.56	0.29	0.47
	Low-E4®	Finelight™ Grilles	0.57	0.29	0.47
		Full Divided Light Grilles	0.58	0.29	0.47
	*	Without Grilles	0.52	0.32	0.53
	Low-E4 w/HeatLock	Simulated Divided Light Grilles	0.52	0.29	0.46
	Low	Finelight Grilles	0.53	0.29	0.46
	/w	Full Divided Light Grilles	0.55	0.29	0.46
	ow-E4 Sun	Without Grilles	0.56	0.21	0.30
MultiGlide™ Door		Simulated Divided Light Grilles	0.56	0.18	0.26
Flush Sill, Non Thermally	S	Finelight Grilles	0.58	0.18	0.26
Controlled Frame, Contemporary		Full Divided Light Grilles	0.58	0.18	0.26
Aluminum Panel	+ =	Without Grilles	0.55	0.22	0.48
AND-N-157	Low-E4 Low-E4 SmartSun w/HeatLock	Simulated Divided Light Grilles	0.55	0.20	0.42
		Finelight Grilles	0.57	0.20	0.42
		Full Divided Light Grilles	0.57	0.20	0.42
		Without Grilles	0.51	0.22	0.47
		Simulated Divided Light Grilles	0.51	0.19	0.41
		Finelight Grilles Full Divided Light Grilles	0.53 0.55	0.19	0.41
		Without Grilles	0.57	0.19	0.59
	Low-E4 PassiveSun*	Simulated Divided Light Grilles	0.57	0.55	0.59
	ow-l sive	Finelight Grilles	0.58	0.47	0.52
	Pass	Full Divided Light Grilles	0.58	0.47	0.52
		Without Grilles	0.36	0.26	0.44
	£4*	Simulated Divided Light Grilles	0.36	0.23	0.37
	Low-E4*	Finelight™ Grilles	0.37	0.23	0.37
	_	Full Divided Light Grilles	0.37	0.23	0.37
	\$	Without Grilles	0.32	0.26	0.43
	Low-E4 w/HeatLock*	Simulated Divided Light Grilles	0.32	0.22	0.37
	Low	Finelight Grilles	0.34	0.22	0.37
	/w	Full Divided Light Grilles	0.34	0.22	0.37
		Without Grilles	0.36	0.16	0.24
	.ow-E4 Sun	Simulated Divided Light Grilles	0.36	0.14	0.21
Folding Outswing Door	Su	Finelight Grilles	0.37	0.14	0.21
Traditional Panel, 8" Bottom Rail		Full Divided Light Grilles	0.37	0.14	0.21
AND-N-153	Low-E4 Sun w/HeatLock	Without Grilles	0.33	0.16	0.24
		Simulated Divided Light Grilles	0.33	0.14	0.20
		Finelight Grilles	0.34	0.14	0.20
		Full Divided Light Grilles	0.35	0.14	0.20
		Without Grilles	0.35	0.18	0.39
	- E	Simulated Divided Light Grilles	0.35	0.15	0.34
	v-E4 rtSun				
	Low-E4 SmartSun	Finelight Grilles	0.36	0.15	0.34
	Low-E4 SmartSun [™]	Finelight Grilles Full Divided Light Grilles	0.36	0.15	0.34
		Finelight Grilles Full Divided Light Grilles Without Grilles	0.36 0.32	0.15 0.17	0.34 0.38
	Low-E4 SmartSun w/HeatLock	Finelight Grilles Full Divided Light Grilles	0.36	0.15	0.34

[•] This data is accurate as of June 2019. Due to ongoing product changes, updated test results, or new industry standards or requirements, this data may change over time. Ratings are for sizes specified by NFRC for testing and certification. Ratings may vary depending on use of tempered glass, different grille options, glass with capillary breather tubes for high altitudes, etc.

continued on next page

PRODUCT PERFORMANCE

Andersen® NFRC Certified Total Unit Performance — Dual-Pane Glass (continued) For current performance information, please visit **andersenwindows.com**.

Andersen° Product	High-Per	rformance Tempered Glass Type	U-Factor ¹	SHGC ²	VT3
		Without Grilles	0.33	0.28	0.48
	E4°	Simulated Divided Light Grilles	0.33	0.25	0.41
	Low-E4®	Finelight™ Grilles	0.34	0.25	0.41
	_	Full Divided Light Grilles	0.33	0.25	0.41
	*	Without Grilles	0.29	0.28	0.47
	Low-E4 w/HeatLock*	Simulated Divided Light Grilles	0.29	0.24	0.41
	Low	Finelight Grilles	0.31	0.24	0.41
	×	Full Divided Light Grilles	0.29	0.24	0.41
Folding Outswing Door Contemporary Panel AND-N-153		Without Grilles	0.33	0.18	0.27
	Low-E4 Sun	Simulated Divided Light Grilles	0.33	0.16	0.23
	Pow	Finelight Grilles	0.34	0.16	0.23
		Full Divided Light Grilles	0.33	0.16	0.23
	ㅎ	Without Grilles	0.30	0.17	0.26
	Low-E4 Sun w/HeatLock	Simulated Divided Light Grilles	0.30	0.15	0.23
	, Fei Si	Finelight Grilles	ht Grilles 0.32 0	0.15	0.23
	*	Full Divided Light Grilles	0.30	0.15	0.23
	. =	Without Grilles	0.33	0.19	0.43
	Low-E4 SmartSun"	Simulated Divided Light Grilles	0.33	0.17	0.37
	Low	Finelight Grilles	0.33	0.17	0.37
	- S	Full Divided Light Grilles	0.33	0.17	0.37
	. ⊑ 5	Without Grilles	0.29	0.19	0.42
	Low-E4 SmartSun w/HeatLock	Simulated Divided Light Grilles	0.29	0.16	0.36
	Low Heigh	Finelight Grilles	0.31	0.16	0.36
	- \(\overline{\sigma}\)	Full Divided Light Grilles	0.29	0.16	0.36

Andersen® NFRC Certified Total Unit Performance — Triple-Pane Glass

For current performance information, please visit **andersenwindows.com**.

Andersen® Product	High-Perfo	ormance Tempered Glass Type	U-Factor ¹	SHGC ²	VT3
		Without Grilles	0.28	0.25	0.42
	Low-E4*	Simulated Divided Light Grilles	0.28	0.22	0.36
	, o	Finelight™ Grilles	-	-	-
	_	Full Divided Light Grilles	-	-	-
	-	Without Grilles	0.25	0.25	0.41
	15 E	Simulated Divided Light Grilles	0.25	0.22	0.35
	Low-E4 Enhanced	Finelight Grilles	-	-	-
	ш	Full Divided Light Grilles	-	-	-
	7.4	Without Grilles	0.23	0.24	0.40
	Low-E4 Enhanced n/HeatLock*	Simulated Divided Light Grilles	0.23	0.21	0.34
MultiGlide™ Door	Low	Finelight Grilles	-	-	-
On-Floor Sill, Thermally	_ E _	Full Divided Light Grilles	-	-	-
Controlled Frame, Traditional	2_	Without Grilles	0.28	0.17	0.38
Clad Wood Panel AND-N-156	-E4 Sun	Simulated Divided Light Grilles	0.28	0.15	0.33
100	Low-E4 SmartSun™	Finelight Grilles	-	-	-
	- S	Full Divided Light Grilles	-	-	-
		Without Grilles	0.25	0.17	0.37
	Low-E4 SmartSun Enhanced	Simulated Divided Light Grilles	0.25	0.15	0.32
	ow- nari	Finelight Grilles		-	-
	_ \times \tau	Full Divided Light Grilles		-	-
	Low-E4 SmartSun Enhanced w/ HeatLock	Without Grilles	0.23	0.16	0.36
		Simulated Divided Light Grilles	0.23	0.14	0.31
		Finelight Grilles	-	-	
		Full Divided Light Grilles		-	-
	Low-E4*	Without Grilles	0.38	0.26	0.42
		Simulated Divided Light Grilles	0.35	0.23	0.36
		Finelight™ Grilles	-	-	-
		Full Divided Light Grilles		-	-
		Without Grilles	0.35	0.25	0.41
	Low-E4 Enhanced	Simulated Divided Light Grilles	0.35	0.22	0.35
		Finelight Grilles	-	-	-
		Full Divided Light Grilles		-	-
	Low-E4 Enhanced w/HeatLock*	Without Grilles	0.33	0.24	0.40
		Simulated Divided Light Grilles	0.33	0.21	0.34
MultiGlide™ Door	ow- han leat	Finelight Grilles	-	-	-
Flush Sill, Non Thermally	그무수	Full Divided Light Grilles		-	-
Controlled Frame, Traditional	2	Without Grilles	0.38	0.18	0.38
Clad Wood Panel	Low-E4 SmartSun™	Simulated Divided Light Grilles	0.38	0.16	0.33
AND-N-158	ow-	Finelight Grilles	-	-	-
	Sm	Full Divided Light Grilles			-
		Without Grilles	0.35	0.17	0.37
	Low-E4 SmartSun Enhanced	Simulated Divided Light Grilles	0.35	0.15	0.32
	ow-l	Finelight Grilles	-	-	-
	SP	Full Divided Light Grilles	-		_
		. a., a., aca cigni allilea			
		Without Grilles	0.33	0.17	0.36
	Sun ed w/	Without Grilles	0.33	0.17	0.36
	Low-E4 SmartSun Enhanced w/ HeatLock	Without Grilles Simulated Divided Light Grilles Finelight Grilles	0.33	0.17	0.36

Refer to notes on page 37 for important information on performance data.

Andersen® Product	High-Perfo	ormance Tempered Glass Type	U-Factor ¹	SHGC ²	VT3
		Without Grilles	0.28	0.29	0.49
	Ē4*	Simulated Divided Light Grilles	0.28	0.26	0.43
	Low-E4®	Finelight Grilles	-	-	-
		Full Divided Light Grilles	-	-	-
	ed 4	Without Grilles	0.25	0.25	0.41
	Low-E4 inhanced	Simulated Divided Light Grilles	0.24	0.25	0.41
	크틉	Finelight Grilles Full Divided Light Grilles	-	-	
	್ರಿ	Without Grilles	0.22	0.27	0.46
	Low-E4 Enhanced w/HeatLock*	Simulated Divided Light Grilles	0.22	0.24	0.40
MultiGlide™ Door	-ow- nhar Heat	Finelight Grilles	-	-	-
On-Floor Sill, Thermally	, Er L	Full Divided Light Grilles	-	-	-
Controlled Frame, Contemporary Clad Wood Panel	2_	Without Grilles	0.27	0.20	0.44
AND-N-156	Low-E4 SmartSun™	Simulated Divided Light Grilles	0.27	0.17	0.38
	Lov	Finelight Grilles	-	-	-
	0,	Full Divided Light Grilles	-	-	-
	ed n	Without Grilles	0.24	0.19	0.42
	Low-E4 SmartSun Enhanced	Simulated Divided Light Grilles Finelight Grilles	0.24	0.17	0.37
	고유급	Full Divided Light Grilles	-		
	_ >	Without Grilles	0.22	0.18	0.41
	tSun ed v	Simulated Divided Light Grilles	0.22	0.16	0.36
	Low-E4 SmartSun Enhanced w/ HeatLock	Finelight Grilles	-	-	-
	오블로	Full Divided Light Grilles	-	-	-
		Without Grilles	0.38	0.30	0.49
	Low-E4®	Simulated Divided Light Grilles	0.38	0.26	0.43
	Lov	Finelight Grilles	-	-	-
		Full Divided Light Grilles	- 0.24	- 0.20	- 0.47
	sed 7.	Without Grilles Simulated Divided Light Grilles	0.34	0.29	0.47
	Low-E4 Enhanced	Finelight Grilles	-	-	- 0.41
	크룹	Full Divided Light Grilles	-		-
	Low-E4 Enhanced w/HeatLock*	Without Grilles	0.32	0.28	0.46
		Simulated Divided Light Grilles	0.32	0.25	0.40
MultiGlide™ Door	Low Enha 'Hea	Finelight Grilles	-	-	-
On-Floor Sill, Non Thermally Controlled Frame, Contemporary	× ×	Full Divided Light Grilles	-	-	-
Clad Wood Panel	Low-E4 Low-E4 SmartSun ^w Enhanced	Without Grilles	0.38	0.20	0.44
AND-N-156		Simulated Divided Light Grilles	0.38	0.18	0.38
		Finelight Grilles Full Divided Light Grilles	-	-	
		Without Grilles	0.34	0.20	0.42
		Simulated Divided Light Grilles	0.34	0.17	0.37
		Finelight Grilles	-	-	-
	_ 2 =	Full Divided Light Grilles	-	-	-
	_ = >×	Without Grilles	0.32	0.19	0.41
	Low-E4 SmartSun Enhanced w/ HeatLock	Simulated Divided Light Grilles	0.32	0.17	0.36
	Smc nhar Hea	Finelight Grilles	-	-	-
	. Ā	Full Divided Light Grilles	- 0.F2	- 0.20	- 0.40
	*	Without Grilles Simulated Divided Light Grilles	0.53	0.30	0.49
	Low-E4	Simulated Divided Light Grilles Finelight™ Grilles	0.03	0.27	0.43
	7	Full Divided Light Grilles	-	-	
	-	Without Grilles	0.49	0.30	0.47
	Low-E4 Enhanced	Simulated Divided Light Grilles	0.49	0.26	0.41
		Finelight Grilles	-	-	-
		Full Divided Light Grilles	-	-	-
	4 po %	Without Grilles	0.47	0.29	0.46
MultiGlide" Door Flush Sill, Non Thermally Controlled Frame, Contemporary Aluminum Panel AND-N-157	Low-E4 Enhanced w/HeatLock*	Simulated Divided Light Grilles	0.47	0.25	0.40
	, Feb	Finelight Grilles	-	-	-
		Full Divided Light Grilles Without Grilles	0.52	0.21	0.44
	Low-E4 SmartSun"	Simulated Divided Light Grilles	0.52	0.21	0.44
		Finelight Grilles	-	-	-
	- S	Full Divided Light Grilles	-	-	
		Without Grilles	0.49	0.20	0.43
		Simulated Divided Light Grilles	0.49	0.18	0.37
	rtSur				-
	Low-E4 smartSur inhance	Finelight Grilles	-	-	
	Low-E4 SmartSun Enhanced	Finelight Grilles Full Divided Light Grilles	-	-	-
		Finelight Grilles Full Divided Light Grilles Without Grilles	0.47	0.20	0.42
	Low-E4 SmartSun SmartSu Enhanced w/ Enhanced	Finelight Grilles Full Divided Light Grilles	-	-	

continued on next page

[•] This data is accurate as of June 2019. Due to ongoing product changes, updated test results, or new industry standards or requirements, this data may change over time. Ratings are for sizes specified by NFRC for testing and certification. Ratings may vary depending on use of tempered glass, different grille options, glass with capillary breather tubes for high altitudes, etc.



Andersen* NFRC Certified Total Unit Performance—Triple-Pane Glass (continued) For current performance information, please visit **andersenwindows.com**.

Andersen° Product	High-Performance Tempered Glass Type		U-Factor ¹	SHGC ²	VT3
		Without Grilles	0.36	0.23	0.38
	*	Simulated Divided Light Grilles	0.36	0.20	0.32
	Low-E4*	Finelight™ Grilles	-	-	-
		Full Divided Light Grilles			-
		Without Grilles	0.33	0.23	0.36
	Low-E4 Enhanced	Simulated Divided Light Grilles	0.33	0.20	0.31
	ow-l	Finelight Grilles	-	-	-
	7 년	Full Divided Light Grilles		-	-
	ಀ	Without Grilles	0.31	0.22	0.35
	5 de 4	Simulated Divided Light Grilles	0.31	0.19	0.30
	ow-E nan eatl	Finelight Grilles	-	-	-
Folding Outswing Door	Low-E4 Enhanced w/HeatLock*	Full Divided Light Grilles	-	-	
Traditional Panel, 8" Bottom Rail		Without Grilles	0.35	0.16	0.34
AND-N-153	45 E				
	Low-E4 SmartSun™	Simulated Divided Light Grilles	0.35	0.14	0.29
	Sme	Finelight Grilles	-	-	-
		Full Divided Light Grilles	- 0.22	- 0.15	- 0.22
	4 un be	Without Grilles	0.33	0.15	0.33
	Low-E4 SmartSun Enhanced	Simulated Divided Light Grilles	0.33	0.14	0.28
	SE	Finelight Grilles	-	-	-
		Full Divided Light Grilles	-	-	
	Low-E4 SmartSun Enhanced w/ HeatLock	Without Grilles	0.31	0.15	0.32
		Simulated Divided Light Grilles	0.31	0.13	0.27
		Finelight Grilles	-	-	-
		Full Divided Light Grilles	-	-	-
	Low-E4*	Without Grilles	0.33	0.26	0.44
		Simulated Divided Light Grilles	0.32	0.23	0.38
		Finelight™ Grilles	-	-	-
		Full Divided Light Grilles	-	-	-
	. 72	Without Grilles	0.29	0.26	0.42
	Low-E4 Enhanced	Simulated Divided Light Grilles	0.29	0.23	0.36
		Finelight Grilles	-	-	-
		Full Divided Light Grilles	-	-	-
	Low-E4 Enhanced w/HeatLock*	Without Grilles	0.27	0.25	0.41
		Simulated Divided Light Grilles	0.27	0.22	0.35
F.1	Low nha Hea	Finelight Grilles	-	-	-
Folding Outswing Door	≥ ™	Full Divided Light Grilles	-	-	-
Contemporary Panel AND-N-153	2_	Without Grilles	0.32	0.18	0.39
NID II 133	Low-E4 SmartSun™	Simulated Divided Light Grilles	0.32	0.16	0.34
	Low	Finelight Grilles	-	-	-
	S	Full Divided Light Grilles	-	-	-
	- F	Without Grilles	0.29	0.17	0.38
	Low-E4 SmartSun Enhanced	Simulated Divided Light Grilles	0.29	0.15	0.33
	nari nari	Finelight Grilles	-	-	-
	L S F	Full Divided Light Grilles	-	-	-
	- >	Without Grilles	0.27	0.17	0.37
	Low-E4 SmartSun Enhanced w/ HeatLock	Simulated Divided Light Grilles	0.27	0.15	0.32
	ow- nart anc	Finelight Grilles	-	-	
	고양	Full Divided Light Grilles	-	-	-
	ш	i un Divided Light dillies		-	

^{• &}quot;Low-E4", "Low-E4" SmartSun"", "Low-E4" Sun" and "HeatLock" are Andersen trademarks for "Low-E" glass. 1) U-Factor defines the amount of heat loss through the total unit in BTU/hr/ft².9". The lower the value, the less heat is lost through the entire product. Window values represent non-tempered glass. Use of tempered glass can increase U-Factor ratings. See andersenwindows.com/nfrc for specific performance values. Door values represent tempered glass. 2) Solar Heat Gain Coefficient (SHGC) defines the fraction of solar radiation admitted through the glass both directly transmitted and absorbed and subsequently released inward. The lower the value, the less heat is transmitted through the product. 3) Visible Transmittance (VT) measures how much light comes through a product (glass and frame). The higher the value, from 0 to 1, the more daylight the product lets in over the product's total unit area. Visible Transmittance is measured over the 380 to 760 nanometer portion of the solar spectrum.

IMPORTANCE OF PROPER INSTALLATION

Proper installation and maintenance of Andersen products is essential to attain optimum performance and operation. Andersen strongly recommends consultation with the local supplier or an experienced contractor, architect or structural engineer prior to the installation of any Andersen product. The method of attachment for Andersen products, fastener selection and Ocode compliance is the responsibility of the architect, building owner, contractor, installer and/or consumer.

For the best installation experience, read and follow the installation guide and all cautions and warnings. Have the appropriate tools and materials to complete the project as described in the installation guide.

MultiGlide™ Doors

Because of the array of features and options available for MultiGlide doors, Andersen has developed two distinct tools that are available at **andersenwindows.com/multiglide.**

The first is a sizing calculator that helps guide how to properly design, specify, and prepare an opening needed for a successful MultiGlide door installation.

From prep, unpacking, installing, adjusting, there are specific steps and procedures that need to be followed; but with over 6,800 possible MultiGlide door configurations, a generic installation guide included in the door package would not be specific enough. Instead, Andersen has developed configurable installation guides that can be created using the installation guide configurator. The tool uses answers to a few simple product and construction questions to create customized installation instructions (in PDF format with multiple language options) and animated videos for each step in the installation procedure. The configured installation guide is customized for your door as well as the construction of the building and includes rough opening preparation, sealing, shimming, fastening, flashing and water management.

Folding Outswing Doors

For folding outswing door installation guides, go to **andersenwindows.com**. Installation guides are also included with the door along with an installation layout sheet provided to identify where each piece of hardware is located and to identify the proper sequencing of the panels.

The folding outswing door is conveniently packaged for job site delivery and installation.

NFRC ratings are based on modeling by a third-party agency as validated by an independent test lab in compliance with NFRC program and procedural requirements.

This data is accurate as of June 2019. Due to ongoing product changes, updated test results or new industry standards or requirements, this data may change over time. Ratings are for sizes specified by NFRC for testing and certification. Ratings may vary depending on unit size, use of tempered glass, different grille options, glass with capillary breather tubes for high altitudes, etc.

Values are for single units with given pane thickness and 1" (25mm) grilles for door products.



THE ENVIRONMENT HAS A BUSINESS PARTNER.

Respect for the environment is nothing new at Andersen. For more than a century, it's been part of who we are. Our commitment to recycle and reclaim materials began simply because it was good business. Now it's part of our broader commitment to sustainability and responsible stewardship of all our resources. Andersen is committed to providing you with long-lasting, energy-efficient windows and patio doors. Visit andersenwindows.com/sustainability for more information.



Andersen® products are certified under the National Fenestration Rating Council's voluntary third-party certification program designed to ensure accurate energy performance ratings and labeling.



The Window & Door Manufacturers Association (WDMA) Hallmark Certification program includes product testing and quality-control process audits to verify that Andersen® windows and doors are produced in conformance with the industry standards for air, water resistance and structural performance.

