

Residential Skylights 2023 Catalog

Skylights, Sun Tunnel® Skylights, and Roof Windows

Contents

6 Deck-Mounted Skylights

VSS Solar-Powered

VSE Electric-Powered

VS Manual

FS Fixed

8 Curb-Mounted Skylights

VCS Solar-Powered

VCE Electric-Powered

VCM Manual

FCM Fixed

10 Flat Roof Skylights

GSM Fixed SkyMax

FXG Fixed Double Dome with Acrylic

 \mathbf{CFU} Fixed Base Unit with ISU CurveTech Cover

CXP Hatch with Polycarbonate Dome Top Cover

12 Self-Flashed Skylights

EVMS Solar-Powered

EV Manual

EF Fixed

QPF Fixed

14 Skylight Shades

Solar-Powered Skylight Shades Manual Roof Window Shades

16 Roof Windows

GPU Top-Hinged

GGU Center-Pivot

GXU Roof-Access

GDL Balcony

18 Sun Tunnel® Skylights

TGR / TGF Low-Profile Dome

TMR / TMF Pitched Dome

TCR Curb-Mount Dome

TLR Low-Profile Glass

TZRQ Pan-Flashed Glass

TZR / TZRL Curb-Mount Glass

20 Architectural Skylights

Custom Structural


VMS Modular

22 Flashing Systems

Deck-Mount

Curb-Mount



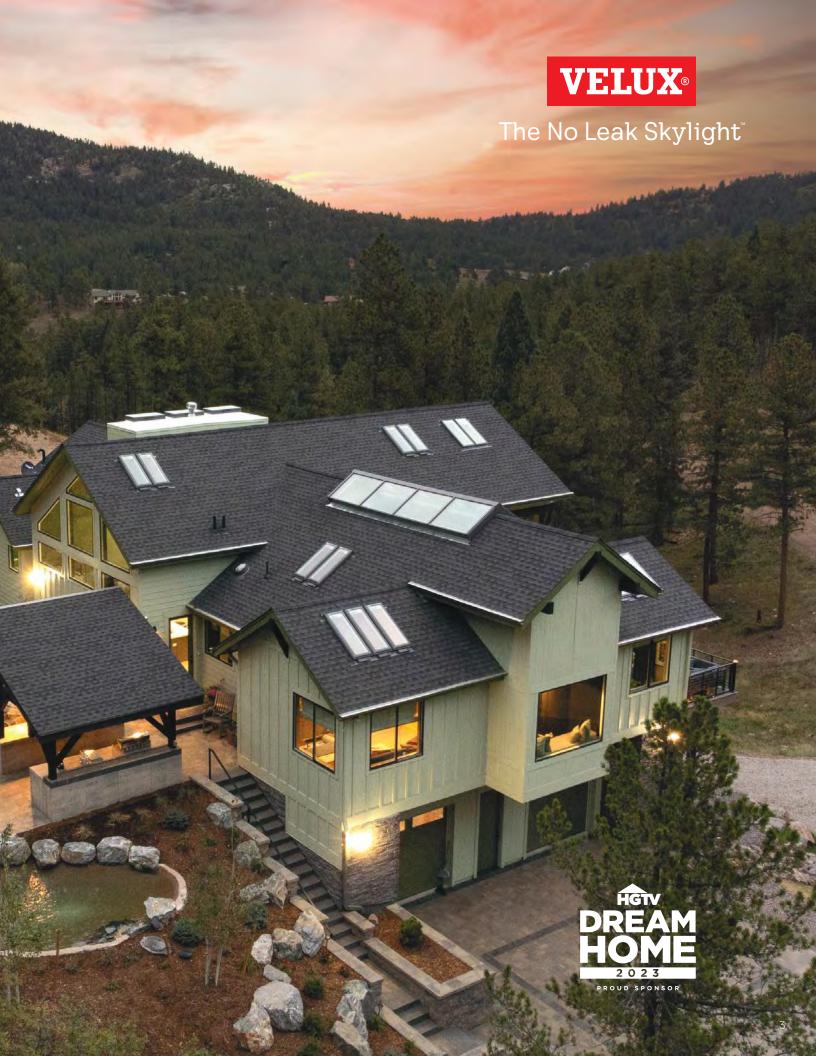






Meet the No Leak Skylight

Three patented layers of water protection work together to ensure your VELUX Skylight will not leak.

The No Leak Promise is our commitment that VELUX Skylights installed with our flashing will not leak. We're able to make this commitment with a 10-year installation warranty backed by our patented three layers of water protection on deck- and curb-mounted skylights.





- Pre-Attached Seal
 Pre-attached deck seal (deck-mounted) or gasket (curb-mounted) provides a tight seal for leak-proof installation.
- 2 Adhesive Underlayment
 Adhesive underlayment for secondary water
 protection against the harshest weather conditions.
- Engineered Flashing
 Engineered flashing for easy installation and primary water protection. See page 22 for flashing systems.





Deck-Mounted Skylights

Explore our wide range of classic deck-mounted skylights, including solar, electric, and manual versions. As part of our No Leak skylights, these deck-mounted units stand tough against the elements without compromising on bringing natural light and fresh air into the space below.





Solar-Powered "Fresh Air" Skylight

1 2 3 4 5

- Powered by a discreet solar panel allowing you to open and close your skylight with the touch of a button without using your home's electricity
- Equipped with a built-in rain sensor to close the unit in the event of inclement weather





Electric "Fresh Air" Skylight

- Concealed motor and control system easily opens and closes skylight with a remote
- Equipped with a built-in rain sensor to close the unit in the event of inclement weather





Manual "Fresh Air" Skylight

- Opens and closes by hand with a smooth turning handle for in-reach applications and a rod for out-of-reach ones
- Choose from a variety of different glasses from impacted, white laminated, snowload or tempered







Fixed Skylight

- Designed to visually expand a space by bringing in an abundance of natural light
- Choose between a variety of different glasses from impacted, white laminated or snowload
- · Clean, low-profile appearance allows this skylight to fit in on any roof

Optional Upgrades: Impact Glass¹ | Snowload Glass² | Copper Cladding³ | Stain Grade Wood Interior⁴

¹ Excluding FS size C12. ² Excluding FS sizes C12, D26, D06. ³ Excluding VSS, VSE size M02. Pre-installed shades not available. ⁴ Excluding VSE. Pre-installed shades not available.



Go Solar. Save Big!

Pre-installed solar-powered shades are eligible for a 30%* federal solar tax credit.

See page 15

1 Add the VELUX App Control system, Gateway + App:
Control your VELUX shades anytime, anywhere with your smartphone or smart home device.

2 Add the Smart Tech Option: VELUX ACTIVE includes App Control plus smart sensors that continuously monitor temperature, humidity and CO2

levels to open or close your

skylights automatically.

* For more information visit veluxusa.com/taxcredit.

Standard Sizes	A06	C01	C04	C06	C08	C12	D26	D06	M02	M04	M06	80M	S01	S06
14° - 85° 3:12 - 137:12														
Rough Opening (W-in.x H-in.)	14 ½ x 45 ¾	21 x 26 %	21 x 37 %	21 x 45 ¾	21 x 54 ½	21 x 70 ¼	22 ½ x 22 ½ ₁₆	22 ½ x 45 ¾	30½ x 30	30 ½ x 37 %	30 ½16 x 45 ¾	30 ½ x 54 ½ 6	44 ½ x 26 %	44 ½ x 45 ¾
VSS Solar / VSE Electric		•	•	•	•				•	•	•	•	•	•
VS Manual		•	•	•	•				•	•	•	•	•	•
FS Fixed	•	•	•	•	•	•	•	•	•	•	•	•	•	•

³ Wireless remote included. 4 Equipped with insect screen. 5 No Leak Warranty when installed with VELUX Flashing, see page 5.



Curb-Mounted Skylights

Enjoy the benefits of fresh air and natural light even if you have a flat or lower pitched roof with our specially designed curb-mounted skylights. This skylight is built like a shoe box with the curb as the box and the skylight as its top, allowing for installation on a wider variety of rooftops.















- · Solar-powered battery control system easily opens and closes skylight with remote or smartphone app
- · Go Solar: VCS is eligible for a federal solar tax credit





Electric "Fresh Air" Skylight

- · Concealed motor and control system easily opens and closes skylight with a remote
- · Rain sensor automatically closes skylight at the first sight of rain



VCM



Manual "Fresh Air" Skylight

- · Manually open and close the skylight with smooth-turning handles or control rods
- · White frames and sashes create a sleek, high quality finish



FCM



Fixed Skylight

- · Low profile creates a clean, streamlined appearance on the roof
- · Positioning allows for twice the natural light as vertical windows

Optional Upgrades: Impact Glass¹ | White Laminated Glass² | Triple Pane Glass³

¹ Excluding VCE. Excluding FCM sizes 2270, 3055, 4672. ² Excluding VCE. VCM sizes 2222, 2246, 4646 only. FCM sizes 1430, 1446, 2230, 3055, 3446, 4672 only.

³ Available only for FCM sizes 2222, 2246, 4646.



Go Solar. Save Big!

Pre-installed solar-powered shades are eligible for a 30%* federal solar tax credit.**

See page 15

 Add the VELUX App Control system, Gateway + App:

Control your VELUX shades anytime, anywhere with your smartphone or smart home device.

Add the Smart Tech Option:

VELUX ACTIVE includes App Control plus smart sensors that continuously monitor temperature, humidity and CO2 levels to open or close your skylights automatically.

see page 5.

-	TA7:		For the second south to be a second south		NI - 11, 747	7.7.7.1.7.7.7.7.1.2.2.2.2.2.2.2.2.2.2.2.
(3	vvireless remote included.	4	Equipped with insect screen.	(0)	No Leak Warranty when installed with	VELUX Flasning,

Standard Sizes	1430	1446	2222	2230	2234	2246	2270	3030	3046	3055	3434	3446	4622	4646	4672
0°-60° 012-2012															
Outside Curb (W-in.x H-in.)	17½ x 33½	17 ½ x 49 ½	25½ x 25½	25 ½ x 33 ½	25½ x 37½	25½ x 49½	25½ x 73½	33 ½ x 33 ½	33 ½ x 49 ½	33½ x 58½	37½ x 37½	37 ½ x 49 ½	49 ½ x 25 ½	49 ½ x 49 ½	49 ½ x 75 ½
Max Skylight Clearance (W-in.xH-in.)	185%x 345%	185%x 505%	26 5/8 x 26 5/8	26 5/8 x 34 5/8	26 5/8 x 38 5/8	26 5/8 x 50 5/8	26 5/8 x 74 5/8	34 5/8 x 34 5/8	34 5/8 x 50 5/8	34 ⁵ % x 59 ⁵ %	38 5/8 x 38 5/8	38 5/8 x 50 5/8	50 5/8 x 26 5/8	50 5/8 x 50 5/8	50 5% x 76 5%
VCS Solar / VCE Electric			•		•	•		•	•		•		•	•	
VCM Manual			•		•	•		•	•		•			•	
FCM Fixed	•	•	•	•	•	•	•	•	•	•	•	•		•	•

^{*} For more information visit veluxusa.com/taxcredit. ** Shades are not available for FCM sizes 1430, 1446, 3055, 4672.




Flat Roof Skylights

Designed for homes with flat or low-slope roofs, VELUX Flat Roof Skylights transform any space with natural light. The innovative design of these skylights lets in more daylight, easily sheds rainwater, and stands out as a modern addition to roof surfaces.

Flat Roof









Fixed SkyMax Skylight

- Covers areas up to 35 square feet 10 feet at the longest dimension
- Solarban® 70XL glass standard, custom glass options available including Hurricane Resistant*
- Standard 2604 powdered coat finish in VELUX Grey with additional designer colors or copper cladding available
- Minimum dimension 17 ½", maximum dimension 120"

Fixed Double Dome Acrylic

- Curb-mounted model with neutral gray exterior color
- Encapsulated inner frame is 100% thermally broken
- Standard glazing with clear over clear or clear over white acrylic
- Available with bronze over clear glazing and custom sizes*

Fixed CurveTech Glass

- ISU CurveTech top cover with CurveTech glass lets rainwater easily roll off for a clean look while preventing leaks
- Tempered glass top cover is virtually scratch-proof, providing a durable layer of protection
- CFU fixed base unit with laminated glass for added safety, sound control, and thermal protection
- · Insulated PVC frame

Hatch Polycarbonate Dome

- \cdot Opens manually up to 60° for roof access
- Highly impact resistant domed polycarbonate outer cover lets rainwater easily roll off for a clean look while preventing leaks
- Inner laminated glass for added safety, sound control, and thermal protection
- · Insulated PVC frame

GSM Custom Finish Colors:



VELUX Grey finish standard. Other custom finish colors are available.**

Shades and flashing kits are not available with GSM and FXG models.

Standard Sizes	225225	225465	305305	345345	465465	4896	5199	
GSM FXG 1°-60° 1/4:12-20:12 0°-60° 0:12-20:12								
Outside Curb (W-in.x H-in.)	25½ x 25½	25 ½ x 49 ½	33 ½ x 33 ½	37 ½ x 37 ½	49 ½ x 49 ½	48 x 96	51 x 99	
Max Skylight Clearance (W-in.x H-in.)	$27 \frac{1}{16} x$ $27 \frac{1}{16}$	27 ½ x 51 ½ 6	35 ½ x 35 ½ 6	$39\frac{1}{16}x$ $39\frac{1}{16}$	51 ½ x 51 ½ 6	49 ¼ x 97 ¼	52 ¼ x 100 ¼	
GSM SkyMax Fixed						•	•	
FXG Domed Fixed	•	•	•	•	•			

Standard Sizes	060060	080080	090060	120090	120120	090090	100100	150100	150150	200100	090120	100100	120120
0° - 15° 0:12 - 3:12													
Rough Opening (W-in.x H-in.)	23 ¹¹ / ₁₆ x 23 ¹¹ / ₁₆	31 %6 x 31 %6	35 ½ x 23 ¼6	47 ½6x 35 ½	47 ½6 x 47 ½6	35 ½ x 35 ½	39 % ₆ x 39 % ₆	59 ½ x 39 ½	59 ½ x 59 ½	78 ¾ x 39 ¾ ₆	35 % x 47 %	39 ¾ x 39 ¾	47 ¼ x 47 ¼
Exterior Frame (W-in.x H-in.)	32 ½6 x 32 ½6	39 ¹⁵ / ₁₆ x 39 ¹⁵ / ₁₆	43 % x 32 ½6	55 ½ x 43 %	55 ½ x 55 ½	43 % x 43 %	47 ¹³ / ₁₆ x 47 ¹³ / ₁₆	67 ½ x 47 ¹¾6	67½ x 67½	87 ¾6 x 47 ¾6	42 ½ x 54 ½6	46 ½ x 46 ½	54 1/16 x 54 1/16
CFU/ISU CurveTech	•	•	•	•	•	•	•	•	•	•			
CXP Domed Hatch											•	•	•

^{*} Call 1-800-888-3589 for information about custom options. ** Visit commercial.veluxusa.com/products/finishes for full list of GSM finish color options.



Self-Flashed Skylights

The VELUX product line of self-flashed skylights differ from both deck- and curb-mounted skylights because their curb and flashing are built into the skylight and come with a watertight seal. These skylights are ideal for thin roofing materials like asphalt and shingles and are ready to install straight out of the box.

Metal Flashed



EVMS









- · Solar-powered battery control system easily opens and closes skylight with remote or smartphone app
- · Rain sensor automatically closes skylight at the first sign of rain
- Easy installation, no sealants or mastic required
- · Available in custom sizes



EV



Manual "Fresh Air" Skylight

- · Manually open and close the skylight with smooth-turning handles or control rods
- · Integrated PVC flashing
- · Easy installation, no sealants or mastic required
- · Available in standard and custom sizes



EF





Fixed Skylight

- · With no mastic, stepflashing, or sealants, skylight is ready to be installed right out of the box in as little as 30 minutes
- · Larger glass area delivers up to 22% more daylight compared to similar models
- · Available in standard and custom sizes



QPF



Fixed Skylight

- · Clean exterior profile provides natural light and sky views without obstructing the roofline
- · Pre-finished white interior wood frame
- · Pre-installed metal flashing designed for sealant based installation

E-Class Custom Finish Colors:



VELUX Grey finish standard. Other custom finish colors are available.**

Optional Upgrades: Impact Glass¹ | White Laminated Glass

¹ Model QPF only.



Go Solar. Save Big!

All VELUX solar-powered shades are eligible for a 30%* federal solar tax credit.

 Add a pre-installed solar **shade:** Harness the power of the sun and control the amount of daylight entering through the skylight.* See page 15.

Add the VELUX App Control system, Gateway + App: Control your VELUX shades anytime, anywhere with your smartphone or smart home device.

2 Wireless remote included. 3 Equipped with insect screen. 4 Available in custom sizes and finish colors. 5 No sealants or flashing required.

E-Class Custom Sizes: EVMS/EV sizing: · Up to 15 sq ft · Min RO: 22 1/4" W or H · Max RO: 48" W or 54" H

Standard Sizes	2222	2230	2238	2246	2254	3030	3046	3054	4646
E-Class QPF 14°-85° 10°-60° 3:12-137:12 20:12									
Rough Opening (RO) (W-in.x H-in.)	22½x 22½	22½ x 30½	22½x 38½	22½x 46½	22½x 54½	30 ½ x 30 ½	30 ½ x 46 ½	30 ½ x 54 ½	46 ½ x 46 ½
EV/EF E-Class	•	•	•	•	•	•	•	•	•
QPF Fixed	•	•		•		•	•		•

EF sizing:

- · Up to 23 sq ft
- · Min RO: 14 1/2" W or H
- · Max RO: 72" W or H

EVMS is available in custom sizes only.

^{*} For more information visit veluxusa.com/taxcredit. Shades are available for standard sizes only, ** Visit commercial.veluxusa.com/products/finishes for full list of E-Class finish color options.



Solar Skylight Shades & Manual Roof Window Shades

Solar shades add the ultimate functionality to skylights. Sustainably powered by the sun, solar skylight shades give you control over the amount of light in your home. Use the included Wall Switch to easily open and close your shades, or upgrade to our new Intelligent Touch Remote for even smarter operation.

Complete the look of your roof window with stylish, manuallyoperated roof window shades! Available in a variety of styles and colors to match your decor, roof window shades easily glide up and down to let in just the right amount of light for your space.





Go Solar. Save Big!

All VELUX solar-powered shades are eligible for a 30%* federal solar tax credit.

When you Go Solar by purchasing VELUX solar-powered products, you are eligible for a 30% federal solar tax credit on the entire cost of products and installation. Just ask for the Go Solar option with your skylight to save big!



Room-Darkening Double-Pleated

- Specially designed to convert day into night by blocking out even the brightest sunlight
- Solar skylight shades are sustainable and easy to use as they are powered by the sun and operated via a wireless wall switch
- Manual shades available for roof windows**

Light-Filtering Single-Pleated

- Perfect for evenly distributing a soft amount of light across rooms like a kitchen or living room
- Solar skylight shades are easy to install and easy to operate with our included wireless wall switch
- Manual shades available for roof windows**

Blackout Flat Fabric

- Flat fabric design offers an energy-efficient sleek design while being able to filter incoming light
- Solar skylight shades are powered by the sun and operated by using our included wireless wall switch
- Manual shades available for roof windows**

Venetian Manual Shades

- Available for roof windows only**
- Manually operated by hand featuring a sleek design with no visible cords
- Moisture-resistant aluminum slats increase privacy and control incoming sunlight

In-Stock
Free Factory Installation



Special Order Shades ship separately from skylight



In-Stock Free Factory Installation



Special OrderShades ship separately from skylight



Special Order Shades ship separately from skylight



In-Stock

Ships separately from Roof Window



Special Order

Ships separately from Roof Window



🔻 In-Stock: 2-4 business days 🔻 In-Stock: Up to 13 business days 🤻 Special Order: Shades ship separately from your skylight, 14 business days

^{*} For more information visit veluxusa.com/taxcredit. ** Manual shades are available in all colors and styles for VELUX Roof Windows, see page 17.



Roof Windows

VELUX Roof Windows are installed within reach and manually open to let fresh air flow in while maximizing the amount of natural light in a space. Perfect for loft conversions and attic spaces, roof windows offer panoramic views, natural ventilation, and increased energy efficiency.





GGU





Top-Hinged

- Innovative top control bar allows for lower installation, providing excellent views while standing or seated
- Convenient bottom handle for simple operation within reach
- Unique ventilation flap with built-in reusable air filter allows fresh, filtered air through with the window closed
- · Interior wood frame with white polyurethane finish

Center-Pivot

- Convenient and simple to operate, even with furniture placed beneath
- Easy to open and quick to close with the innovative top control bar
- Lower installation allows for more flexibility and better views while standing or seated
- Unique ventilation flap allows fresh, filtered air through with the window closed
- · Interior wood frame with white polyurethane finish

Roof Access

- Opens wide for easy access to the roof for repairs, maintenance, emergency, and egress
- Greatly increase the amount of natural light and fresh air in your rooms
- Sleek outer appearance blends in with your roofline
- · Innovative locking device keeps window open so it won't fall shut
- Interior wood frame with white polyurethane finish


Balcony

- Easily transforms from roof window to balcony in seconds
- Provides abundant daylight and great floor-to-ceiling views
- Unique ventilation flap allows fresh, filtered air through with the window closed
- Balcony fits flush with the roof when closed for a sleek exterior look
- · Stain grade wood interior



Add Shades!

Roof windows are compatible with VELUX manual shades for ultimate light control.



White manual shades stocked. Special order colors available, see page 15.

• Satisfies egress requirements - consult local code officials regarding egress requirements as they may vary by jurisdiction.

GPU Top-Hinged



GGU Center-Pivot



GXU Roof-Access





GDL Balcony



Sun Tunnel® Skylights

Adding a Sun Tunnel® skylight is a cost-effective way to add natural light to areas that need a brighter, more vibrant appearance. Their low-profile design creates a sleek appearance on any roofline, and their pre-fabricated light tube makes them quick and easy to install. Not to mention, they come with a 20-year tube warranty.





TGF (flex) / TGR (rigid) Low-Profile

- · Angled dome is ideal for south-, west-, and eastfacing roofs
- · Parallel design to blend with roofline



TMF (flex) / TMR (rigid)

Pitched

- · Raised dome allows for consistent light distribution throughout the day
- · Provides straighter tube run through most roof pitches



Curb-Mount

- · One-piece metal, curb-mounted flashing
- · Ideal for low roof slopes and tile roofs



TLR

Low-Profile

- · Low profile glass design for a sleek appearance
- · Perfect where local ordinances prohibit acrylic domes on roofs



TZRQ.

Pan-Flashed

- · For shingle roofs
- · Glass options include tempered fireproof diamond wire or laminated hurricane



TZR / TZRL

Curb-Mount

- · For tile or shingle roofs - TZRL includes flashing kit for shingled roofs
- · Glass options include tempered fireproof diamond wire or laminated hurricane

Accessories:

Ceiling Rings and Frosted Diffusers



Frosted (Standard)

Micro Fresnel

Triple Wave









Electric Light Kit



Energy Kit

Daylight Controller



Other Accessories: Diffusion enhancer, additional rigid tube sections and elbows, suspension wire kit, exterior fire band, vapor barrier, flashing kits.



Go Solar. Save Big!

VELUX solar-powered night light is eligible for a 30% federal solar tax credit.

For more information visit veluxusa.com/taxcredit.



Designed to fit inside the rigid tube of a VELUX Sun Tunnel® skylight, the VELUX Solar Night **Light** gives off a soft, soothing glow from above when natural light isn't available.

Standard Sizes	TGF			TGR		TMF	TMR		TCR	TLR	TZRQ	TZR	TZRL
	014	022	010	014	022	014	010	014	014	014	014	014	014
	\bigcirc		0	\bigcirc			0	\bigcirc					
	14°	-60° 20:12		14° - 60° 3:12 - 20:12		14°-60° 3:12-20:12	14°	-60° 20:12	0°-60° 0:12-20:12	14° - 60° 3:12 - 20:12	10° - 60° 2:12 - 20:12	0°-60° 0:12-20:12	10° - 60° 2:12 - 20:12
Rough Opening – Ceiling (Inches)	15 ¹ / ₄	223/4	111/4	15 ¹ / ₄	223/4	15 ¹ / ₄	11 1/4	15 ¹ / ₄	15 1/4	151/4	15 1/4	15 1/4	15 ¹ / ₄
Rough Opening - Roof Deck* (W-in.x H-in.)	14 ½ x 18	22 ½ x 26	12½ x 16	14½ x 18	22 ½ x 26	14 ½ x 20	12½x 16	14 ½ x 20	_	14 ½ x 17 ¾	14 ½ x 14 ½	_	14 ½ x 14 ½
Outside Curb Dimensions** (W-in.x H-in.)	-	_	-	-	-	-	-	-	20 ⁷ / ₈ x 20 ⁷ / ₈	-	-	17 ½ x 17 ½	-
Tunnel Length Included with Kit (Feet)	8	8	4	4	4	8	4	4	4	4	4.3	5.3	5.3
Maximum Recommended Install Length (Feet)	8	12	20	30	40	8	20	30	30	30	30	30	30

^{*} Roof deck rough opening height dependent on roof pitch, refer to installation instructions for proper measurement. ** Including roofing materials.









Architectural Skylights

The VELUX line of architectural skylights is made up of lightweight, metal-framed structural skylights available in fully customizable configurations, finish colors, and glazing options.

As part of the architectural line, our modular skylight system can be configured to a range of different daylight solutions while offering several features for climate control, ventilation, and shading.

Custom Structural Skylights













Square Pyramid

Polygonal Pyramid

Extended Pyramid

Single Pitch

Double-Pitch

Low Profile

- Create spectacular daylighting applications with unlimited design capabilities
- · Lightweight, metal-framed skylights capable of spanning up to 40 feet wide
- Insulated glass panels help control heat gain and loss in all types of weather
- · Available in a wide variety of highperformance glass and finish colors





MORE INFORMATION



VELUX Modular Skylights - VMS



Longlight



Wall-Mounted Longlight



Step Longlight



Ridgelight



Step Ridgelight



Northlight

- Prefabricated components ensure a quality build, 100% water tightness, and fast, easy installation
- · Available in a variety of configurations with both venting and fixed modules
- Includes electronic control system with wind and rain sensor
- · Optional roller blinds are available to control daylight and solar heat gain



Venting Module



Fixed Module







Flashing Systems


VELUX Skylight Flashing Kits are a crucial part of our complete system designed to shed water without relying on sealants that can break down over time. No matter the scope of your project, we offer a variety of skylight flashing systems to ensure a weather-tight fit for virtually all roof types and slopes so you can easily install the skylight of your dreams.




Deck-Mounted Flashing Systems

Each of our deck-mounted flashing systems is made up of a pre-attached deck seal, adhesive underlayment, and engineered flashing. They attach directly to your roof deck and interweave with the roofing material to ensure your skylight won't leak.














Curb-Mounted Flashing Systems

VELUX curb-mounted skylights have a pre-attached skylight gasket, which provides a tight seal between the site-built curb and skylight. When combined with our curb-mounted engineered flashing and adhesive underlayment, they create a seal to ensure no water leaks around your skylight.







FNFRGY STAR®

One of the most straightforward ways to help meet energy codes as a builder or architect, while still designing bright, airy buildings, is to specify ENERGY STAR® certified products.

Most VELUX residential products are ENERGY
STAR® certified in all 50 states, which means they
meet energy efficiency standards set by the US Environmental
Protection Agency (EPA). In order to be ENERGY STAR® certified,
fenestration products must have their U-factor, Visible Transmittance,
and Solar Heat Gain Coefficient ratings independently tested and
approved under the FenStarSM Certification Program of the National
Fenestration Rating Council (NFRC) to qualify.

By using ENERGY STAR® certified products, architects and builders can use skylights to bring much needed daylight and fresh air inside, allowing them to create more attractive buildings and more livable spaces while still meeting local energy codes.

In warmer climates, there is great potential for lighting energy savings by using emerging control technologies like VELUX ACTIVE or more effective daylighting products like VELUX skylights with shades and Sun Tunnel® skylights.

- For the most up-to-date Federal Solar Tax Credit information, visit veluxusa.com/qo-solar.
- To qualify for the VELUX 10-year installation warranty, VELUX flashing must be purchased. The 10-year installation warranty excludes EVMS, EV, QPF, EF, GSM, FXG, CFU, CXP.
- VELUX shades are not available for any VELUX custom-sized skylights. VELUX shades when purchased with a standard size accessory tray are available for select E-Class skylights.
- Consult local code officials regarding egress requirements as they may vary by jurisdiction.

Code Compliance

VELUX offers a broad array of skylights, roof windows, and Sun Tunnel® skylights that meet the applicable performance requirements and testing and labeling standards written into the most current US Model Codes:

- · 2021 IBC (International Building Code)
- · 2021 IRC (International Residential Code), and
- · 2021 IECC (International Energy Conservation Code),
- · As well as local and regional codes based on the above codes.

Additionally, electrical components built into VELUX products are UL listed.

Standard VELUX residential skylights and Sun Tunnel® products meet the current and prior North American Fenestration Standards (NAFS), also known as AAMA/WDMA/CSA 101/I.S.2/A440. Copperclad versions may not exceed these requirements but do meet other standards required of them.

To verify these attainments on-site, the products are shipped with all required labels to expedite the inspection and final acceptance process. VELUX confidently certifies through these labels that only products consistent with the tested specimens are sent to the job.

Warranty

For over 80 years, VELUX has been dedicated to producing skylights that are synonymous with quality and reliability. Our commitment to you does not end once your skylight is installed.

The VELUX deck- and curb-mounted product family is designated as "The No Leak Skylight." It carries a 10-year installation warranty, plus 20 years on glass seal failure, 10 years on product, and 5 years on shades and controls.

MORE INFORMATION



This limited "No Leak Skylight" warranty does not apply to VELUX products purchased prior to January 1, 2010. Other exclusions apply, see full warranty for details.

Testing Data

VELUX rigorously tests the materials of our skylights so you can rest assured that the products installed in your home are safe.

For our most up-to-date data, visit: veluxusa.com/testing-data



 $NOTICE: ALL\ GLASS\ MAY\ BE\ SUBJECT\ TO\ UNEXPECTED\ AND\ SPONTANEOUS\ BREAKAGE\ in\ rare\ circumstances\ due\ to\ imperfections\ in\ the\ glass\ that\ are\ undetectable\ during\ the\ manufacturing\ and\ inspection\ process\ by\ the\ manufacture\ of\ the\ glass\ and\ VELUX.$

VELUX offers the choice of laminated or tempered glass skylights. Impact glass and comfortplus glass are all types of laminated glass. Comfort glass is a type of tempered glass. Laminated glass is a combination of two or more glass sheets with one or more interlayers of plastic (PVB) or resin. In case of breakage, the interlayer is designed to hold the fragments together. Tempered glass does not contain an interlayer to hold the fragments together. Instead, tempered glass is designed to break into small, pebble-like pieces. When tempered glass breaks, pieces of glass come loose and may strike an individual.

 ${\tt CONSULTLOCALREGULATIONS} \ {\tt AND/OR} \ {\tt BUILDING} \ {\tt MATERIALCONSULTANTS} \ {\tt TO} \ {\tt DETERMINE} \ {\tt WHICHTYPEOFGLASS} \ {\tt IS} \ {\tt RIGHTFOR} \ {\tt YOU} \ {\tt OR} \ {\tt IFLAMINATED} \ {\tt GLASS} \ {\tt IS} \ {\tt REQUIRED} \ {\tt IN} \ {\tt YOUR} \ {\tt APPLICATION}.$

All VELUX skylights, roof windows, Sun Tunnel® skylights, flashing kits and shades must be purchased through a qualified VELUX dealer. Please see the "Where To Buy" section of veluxusa.com website for a list of VELUX dealers near you.

 $Transforming\ spaces\ since\ 1941.\ For\ over\ 80\ years,\ VELUX\ has\ helped\ people\ envision\ and\ achieve\ the\ transformation\ of\ spaces\ using\ daylight\ and\ fresh\ air\ through\ the\ roof.\ Our\ product\ program\ includes\ skylights,\ Sun\ Tunnel@\ skylights,\ decorative\ shades\ and\ roof\ windows,\ as\ well\ as\ installation\ and\ smart\ home\ solutions.\ By\ creating\ brighter,\ healthier,\ more\ sustain\ able\ places\ to live,\ work,\ learn,\ and\ play\ we\ enable\ a\ better\ every daylife\ for\ people\ around\ the\ world.\ We\ work\ globally\ with\ sales\ and\ manufacturing\ operations\ in\ more\ than\ 40\ countries\ and\ around\ 11,500\ employees\ worldwide.\ The\ VELUX\ Group\ is\ owned\ by\ VKR\ Holding\ A/S,\ a\ limited\ company\ wholly\ owned\ by\ non-profit,\ charitable\ foundations\ (THE\ VELUX\ FOUNDATIONS)\ and\ family.\ For\ more\ information,\ visit\ veluxus\ a.com.$

XUX 2018-30125 · © 2023 VELUX Group. VELUX Group. VELUX Group. VELUX Group. VELUX Group. Sun Tunnel® is a trademarks. VELUX Sun Tunnel® is a trademarks. VELUX Group. · © 2018 · 2022 Warner Bros. Discovery, Inc. or its subsidiaries and affiliates. All trademarks are the property of their respective owners. All rights reserved.

Transforming spaces since 1941. For over 80 years, VELUX has helped people envision and achieve the transformation of spaces using daylight and fresh air through the roof. Our product program includes skylights, Sun Tunnel® skylights, decorative shades and roof windows, as well as installation and smart home solutions. By creating brighter, healthier, more sustainable places to live, work, learn, and play we enable a better everyday life for people around the world. We work globally with sales and manufacturing operations in more than 40 countries and around 11,500 employees worldwide. The VELUX Group is owned by VKR Holding A/S, a limited company wholly owned by non-profit, charitable foundations (THE VELUX FOUNDATIONS) and family.

For more information, visit veluxusa.com.

VELUX America LLC 450 Old Brickyard Road PO Box 5001 Greenwood, SC 29648-5001

1-800-888-3589

veluxusa.com whyskylights.com